

Distributed by:



www.texim-europe.com

Datasheet

iCF 1ME series

- iSMART disk health monitoring
- Compliant with E-Mark/SAE J113/ISO 7673-2
- Intelligent error recovery system
- Excellent data transfer speed
- Write protection security
- Enhanced power cycling management



Introduction

The Innodisk Industrial CompactFlash® 1ME Memory Card (iCF 1ME) products provide high capacity solid-state flash memory that electrically complies with the True IDE Mode that is electrically compatible with an IDE disk drive. The original CF form factor card can be used in any system that has a CF slot.

Designed to replace traditional rotating disk drives, Innodisk Industrial CompactFlash® 1ME Memory Cards are embedded solid-state data storage systems for mobile computing and the industrial work place. The Industrial CompactFlash® features an extremely lightweight, reliable, low-profile form factor. Industrial CompactFlash® 1ME (iCF 1ME) support advanced PIO (0-6), Multiword DMA (0-4), Ultra DMA (0-7) transfer mode, multi-sector transfers, and LBA addressing.

innodisk

www.innodisk.com


www.texim-europe.com

ICF 1ME series

Contact us for more information
about the ICF 1ME

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Drawing

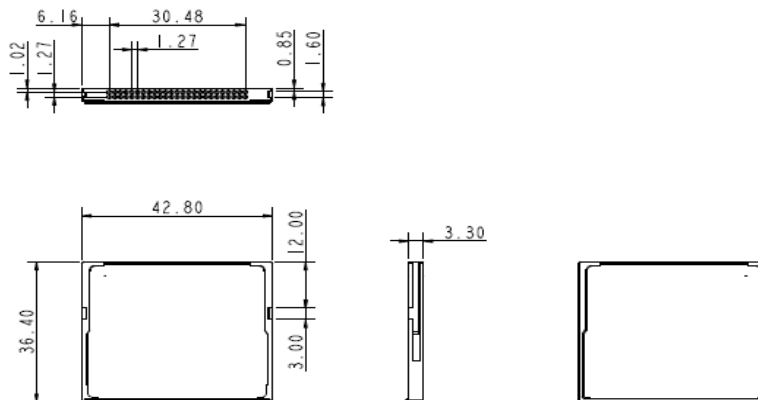

Specifications

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421

Europe
eusales@innodisk.com
+31-(0)40-282-1818

Japan
jpsales@innodisk.com
+81-3-6667-0161

China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Interface	PATA
Flash Type	MLC
Capacity	4GB~128GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	110/75
Max. Power Consumption	0.76W(3.3V x 230mA)
Thermal Sensor	-
External DRAM Buffer	-
H/W Write Protect	Optional
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	42.8X 36.4 X 3.3 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

20151229

Ordering Information

Operation Temp.	4GB	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DECFC-04GD53RC1SC	DECFC-08GD53RC1SC DECFC-08GD53BC1SC	DECFC-16GD53RC1DC DECFC-16GD53BC1SC	DECFC-32GD53RC1DC DECFC-32GD53BC1DC	DECFC-64GD53RC1DC DECFC-64GD53BC1DC	DECFC-A28D53RC1DC DECFC-A28D53BC1DC	DECFC-B56D53BC1DC
Industrial Grade (-40°C ~ +85°C)	DECFC-04GD53RW1SC	DECFC-08GD53RW1SC DECFC-08GD53BW1SC	DECFC-16GD53RW1DC DECFC-16GD53BW1SC	DECFC-32GD53RW1DC DECFC-32GD53BW1SC	DECFC-64GD53RW1DC DECFC-64GD53BW1DC	DECFC-A28D53RW1DC DECFC-A28D53BW1DC	DECFC-B56D53BW1DC

R: Toshiba A19nm MLC / B: Toshiba 15nm MLC

innodisk

www.innodisk.com

www.texim-europe.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com