

FEATURES

- Industrial Standard SIP-7 Package
- I/O Isolation 3000VDC
- Operating Ambient Temp. Range -40°C to +90°C
- Short Circuit Protection

NEW

Distributed by:



PRODUCT OVERVIEW

The MINMAX MAPU02H series is a new range of 2Watt isolated DC-DC power module with 24 models available for 3.3/5/9/12/15/±5/±12/±15 output in a SIP-7 encapsulated package size. Key performance featuring a high I/O isolation voltage rated for 3000VDC, continuous output short circuit protection, wide operating ambient temp. range by -40°C to +90°C assure reliable operation for critical applications in harsh environments. The MAPU02H series which offer a solution for the applications where higher I/O isolation, fault condition protection, fully encapsulated package and wide operating ambient temp. range are required.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current		Input Current		Load Regulation	Max. capacitive Load	Efficiency (typ.)	
			Max.	Min.	@Max. Load	@No Load				
			VDC	VDC	mA	mA	mA(typ.)	mA(typ.)	% (max.)	μF
MAPU02-05S03H	5 (4.5 ~ 5.5)	3.3	500	10	446	446	50	12	440	74
MAPU02-05S05H		5	400	8	513	513		10		78
MAPU02-05S09H		9	222	4.4	506	506		8		79
MAPU02-05S12H		12	168	3.36	498	498		8		81
MAPU02-05S15H		15	132	2.64	495	495		8		80
MAPU02-05D05H		±5	±200	±4	519	519		10	200#	77
MAPU02-05D12H		±12	±84	±1.68	510	510		8		79
MAPU02-05D15H		±15	±66	±1.32	508	508		8		78
MAPU02-12S03H	12 (10.8 ~ 13.2)	3.3	500	10	181	181	30	12	440	76
MAPU02-12S05H		5	400	8	214	214		10		78
MAPU02-12S09H		9	222	4.4	208	208		8		80
MAPU02-12S12H		12	168	3.36	205	205		8		82
MAPU02-12S15H		15	132	2.64	204	204		8		81
MAPU02-12D05H		±5	±200	±4	214	214		10	200#	78
MAPU02-12D12H		±12	±84	±1.68	207	207		8		81
MAPU02-12D15H		±15	±66	±1.32	204	204		8		81
MAPU02-24S03H	24 (21.6 ~ 26.4)	3.3	500	10	90	90	15	12	440	76
MAPU02-24S05H		5	400	8	107	107		10		78
MAPU02-24S09H		9	222	4.4	105	105		8		79
MAPU02-24S12H		12	168	3.36	104	104		8		81
MAPU02-24S15H		15	132	2.64	104	104		8		79
MAPU02-24D05H		±5	±200	±4	110	110		10	200#	76
MAPU02-24D12H		±12	±84	±1.68	105	105		8		80
MAPU02-24D15H		±15	±66	±1.32	104	104		8		79

*Min. Output Current for Lower Load Regulation

For each output

Input Specifications

Parameter	Model	Min.	Typ.	Max.	Unit
Input Voltage Range	5V Input Models	4.5	5	5.5	VDC
	12V Input Models	10.8	12	13.2	
	24V Input Models	21.6	24	26.4	
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	9	
	12V Input Models	-0.7	---	18	
	24V Input Models	-0.7	---	30	
Input Filter	All Models			Internal Capacitor	

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±1.0	±5.0	%
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.1	±1.0	%
Line Regulation	For Vin Change of 1%	---	±1.2	±1.5	%
Load Regulation	I _o =10% to 100%			See Model Selection Guide	
Ripple & Noise	0-20 MHz Bandwidth	---	65	100	mV _{P-P}
Temperature Coefficient		---	±0.01	±0.02	%/°C
Short Circuit Protection				Continuous, Automatic Recovery	

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VDC
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	20	---	pF
Switching Frequency		40	60	100	kHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,608,765	---	---	Hours


Environmental Specifications

Parameter		Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)		-40	+90	°C
Case Temperature		---	+105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

EMC Specifications

Parameter	Standards & Level		Performance
	EMI	Conduction	EN 55032, FCC part 15
EMS	EN 55024		
	ESD	EN 61000-4-2 Air ± 8kV, Contact ± 6kV	A
	Radiated immunity	EN 61000-4-3 10V/m	A
	Fast transient ⁽⁶⁾	EN 61000-4-4 ±2kV	A
	Surge ⁽⁶⁾	EN 61000-4-5 ±1kV	A
	Conducted immunity	EN 61000-4-6 10Vrms	A
	PFMF	EN 61000-4-8 3A/m	A

Power Derating Curve


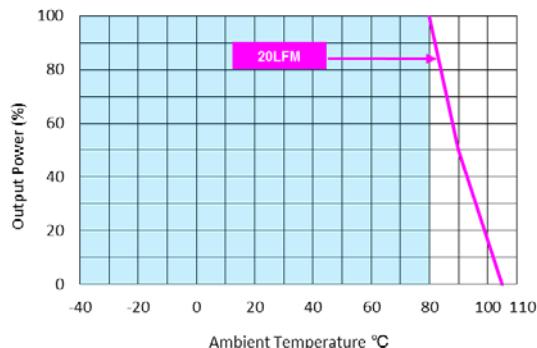


Notes

- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN 55032 Class A an external filter, please contact MINMAX.
- 6 To meet EN 61000-4-4 & EN 61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 7 Specifications are subject to change without notice.

Package Specifications

Mechanical Dimensions

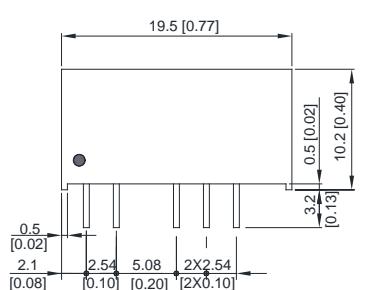

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
2	-Vin	-Vin
4	-Vout	-Vout
5	No Pin	Common
6	+Vout	+Vout

- All dimensions in mm (inches)
- Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- Pins ±0.05(±0.002)


Physical Characteristics

Case Size	:	19.5x7.1x10.2mm (0.77x0.28x0.40 inches)
Case Material	:	Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	:	Tinned Copper
Weight	:	3.1g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Cout uses a $0.47\mu F$ ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

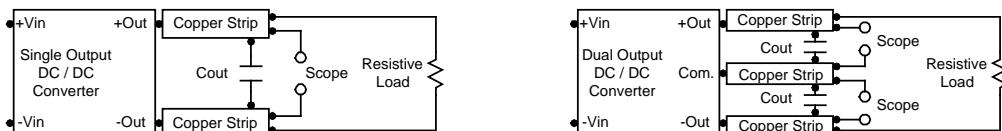


Technical Notes

Overload Protection

To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup. Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0Ω at 100 kHz) capacitor of a $2.2\mu F$ for all the devices.

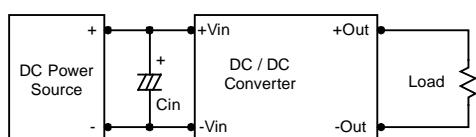

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use $3.3\mu F$ capacitors at the output.

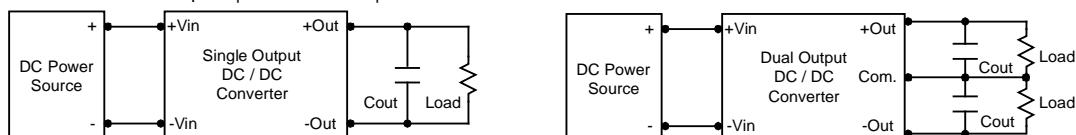


Maximum Capacitive Load

The MAPU02H series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below $95^\circ C$.

The derating curves are determined from measurements obtained in a test setup.



Contact details

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com


Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com