

FEATURES

- ▶ Industrial Standard DIP-24 Package
- ▶ Wide 2:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ I/O Isolation 5000VAC with Reinforced Insulation, rated for 250Vrms Working Voltage
- ▶ Creepage & Clearance Distance meet 8mm
- ▶ Low Leakage Current < 2μA
- ▶ Operating Ambient Temp. Range -40 °C to +90°C
- ▶ No Min. Load Requirement
- ▶ Under-voltage, Overload and Short Circuit Protection
- ▶ Conducted EMI EN 55011 Class A & FCC Level A Approved
- ▶ Medical EMC Standard with 4th Edition of EMI EN 55011 and EMS EN 60601-1-2 Approved
- ▶ Medical Safety with 2xMOPP per 3rd Edition of IEC/EN 60601-1 & ANSI/AAMI ES60601-1 Approved with CE Marking

NEW


PRODUCT OVERVIEW

The MINMAX MIW10M series is a new range of high performance 10W medical approved DC-DC converter within encapsulated DIP-24 package which specifically design for medical applications. There are 24 models available for input voltage of 12, 24, 48VDC with wide 2:1 input range and tight output voltage. The I/O isolation is specified for 5000VAC with reinforced insulation, which rated for 250Vrms working voltage. Further features include under-voltage, overload, short circuit protection, no min. load requirement, EMI emission EN 55011 class A approved, low leakage current 2μA max. and operating ambient temp. range by -40°C to 90°C without derating by high efficiency up to 89%. MIW10M series conform to 4th edition medical EMC standard, medical safety with 2xMOPP (Means Of Patient Protection) per 3rd edition of IEC/EN 60601-1 & ANSI/AAMI ES 60601-1 approved and 8mm creepage and clearance.

The MIW10M series offer a superior solution for demanding application in medical instrument requesting a certified supplementary and reinforced insulation system to comply with latest medical safety approval for 2xMOPP requirement.

Model Selection Guide

Model Number	Input Voltage (Range)	Output Voltage	Output Current	Input Current		Over Voltage Protection	Max. capacitive Load	Efficiency (typ.)
				Max.	@Max. Load			@Max. Load
	VDC	VDC	mA	mA(typ.)	mA(typ.)	VDC	μF	%
MIW10-12S033M	12 (9 ~ 18)	3.3	2700	917	12	3.9	4700	81
MIW10-12S05M		5	2000	992		6.2	3300	84
MIW10-12S051M		5.1	2000	1012		6.2	3300	84
MIW10-12S12M		12	833	957		15	560	87
MIW10-12S15M		15	666	946		18	360	88
MIW10-12S24M		24	416	945		27	140	88
MIW10-12D12M		±12	±416	945		±15	280#	88
MIW10-12D15M		±15	±333	957		±18	180#	87
MIW10-24S033M	24 (18 ~ 36)	3.3	2700	458	8	3.9	4700	81
MIW10-24S05M		5	2000	490		6.2	3300	85
MIW10-24S051M		5.1	2000	500		6.2	3300	85
MIW10-24S12M		12	833	473		15	560	88
MIW10-24S15M		15	666	473		18	360	88
MIW10-24S24M		24	416	473		27	140	88
MIW10-24D12M		±12	±416	473		±15	280#	88
MIW10-24D15M		±15	±333	478		±18	180#	87
MIW10-48S033M	48 (36 ~ 75)	3.3	2700	229	6	3.9	4700	81
MIW10-48S05M		5	2000	245		6.2	3300	85
MIW10-48S051M		5.1	2000	250		6.2	3300	85
MIW10-48S12M		12	833	237		15	560	88
MIW10-48S15M		15	666	237		18	360	88
MIW10-48S24M		24	416	239		27	140	87
MIW10-48D12M		±12	±416	239		±15	280#	87
MIW10-48D15M		±15	±333	239		±18	180#	87

For each output

Input Specifications					
Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	12V Input Models	-0.7	---	25	VDC
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	12V Input Models	---	---	9	
	24V Input Models	---	---	18	
	48V Input Models	---	---	36	
Under Voltage Shutdown	12V Input Models	---	8	---	
	24V Input Models	---	16	---	
	48V Input Models	---	33	---	
Start Up Time (Power On)	Nominal Vin and Constant Resistive Load	---	30	---	mS
Input Filter	All Models	Internal PI Type			


Output Specifications						
Parameter	Conditions		Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy			---	---	±1.0	%Vnom.
Output Voltage Balance	Dual Output, Balanced Loads		---	---	±2.0	%
Line Regulation	Vin=Min. to Max. @Full Load		---	---	±0.5	%
Load Regulation	Io=0% to 100%	Single Output	---	---	±0.5	%
		Dual Output	---	---	±1.0	%
Load Cross Regulation (Dual Output Models)	Asymmetrical Load 25/100% Full Load		---	---	±5.0	%
Minimum Load	No minimum Load Requirement					
Ripple & Noise	0-20 MHz Bandwidth	Measured with a 10µF MLCC	---	50	---	mV _{p-p}
Transient Recovery Time	25% Load Step Change		---	300	---	µsec
Transient Response Deviation			---	±3	±5	%
Temperature Coefficient			---	±0.01	---	%/°C
Over Load Protection	Hiccup		---	150	---	%
Short Circuit Protection	Continuous, Automatic Recovery (Hiccup Mode 0.5Hz typ.)					

Isolation, Safety Standards					
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	5000	---	---	VACrms
	Reinforced insulation, rated for 250Vrms working voltage				
Leakage Current	240VAC, 60Hz	---	---	2	µA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100kHz, 1V	---	---	20	pF
Safety Standards	ANSI/AAMI ES 60601-1, CAN/CSA-C22.2 No. 60601-1				
	IEC/EN 60601-1 3 rd Edition 2xMOPP				
Safety Approvals	ANSI/AAMI ES 60601-1 2xMOPP recognition (UL certificate), IEC/EN 60601-1 3 rd Edition (CB-report)				



General Specifications					
Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	240	---	kHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	3,816,975	---	---	Hours

Environmental Specifications				
Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves)	MIW10-12S033M, MIW10-24S033M, MIW10-48S033M	-40	+60	°C
	MIW10-12S05M, MIW10-12S051M MIW10-24S05M, MIW10-24S051M MIW10-48S05M, MIW10-48S051M		+65	
	MIW10-12S12M, MIW10-12S15M, MIW10-12S24M MIW10-12D12M, MIW10-12D15M MIW10-24S12M, MIW10-24S15M, MIW10-24S24M MIW10-24D12M, MIW10-24D15M MIW10-48S12M, MIW10-48S15M, MIW10-48S24M MIW10-48D12M, MIW10-48D15M		+75	
Case Temperature		---	105	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Altitude		---	5000	m
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

EMC Specifications						
Parameter		Standards & Level		Performance		
EMI		Conduction & Radiation	EN 55011, FCC part 15		Class A	
EMS		EN 60601-1-2				
		ESD	Direct discharge		Indirect discharge HCP & VCP	
			EN 61000-4-2 Air ± 15kV			
		Contact ± 8kV		A		
		Radiated immunity		EN 61000-4-3 10V/m		A
		Fast transient ⁽⁵⁾		EN 61000-4-4 ±2kV		A
		Surge ⁽⁵⁾		EN 61000-4-5 ±2kV		A
		Conducted immunity		EN 61000-4-6 10Vrms		A
PFMF		EN 61000-4-8 30A/m		A		

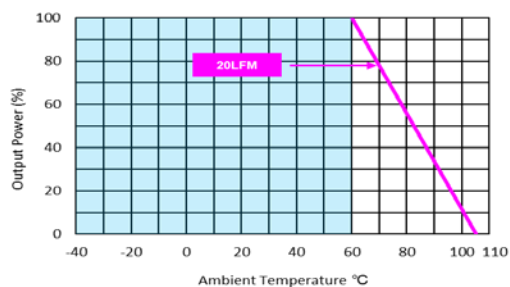Power Derating Curve


MIW10-12S033M, MIW10-24S033M, MIW10-48S033M

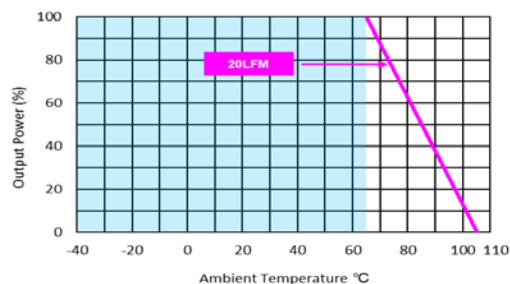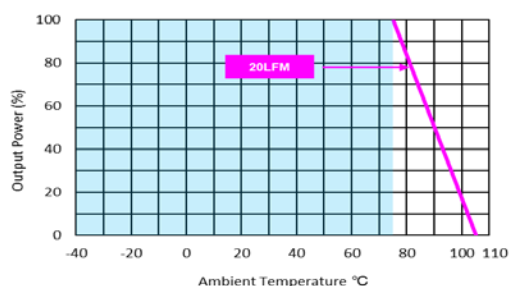

MIW10-12S05M, MIW10-12S051M
MIW10-24S05M, MIW10-24S051M
MIW10-48S05M, MIW10-48S051M

MIW10-12S12M, MIW10-12S15M, MIW10-12S24M, MIW10-12D12M, MIW10-12D15M
MIW10-24S12M, MIW10-24S15M, MIW10-24S24M, MIW10-24D12M, MIW10-24D15M
MIW10-48S12M, MIW10-48S15M, MIW10-48S24M, MIW10-48D12M, MIW10-48D15M

Notes

- 1 Specifications typical at $T_a = +25^\circ\text{C}$, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN 61000-4-4 & EN 61000-4-5 an external capacitor across the input pins is required, please contact MINMAX.
- 6 Specifications are subject to change without notice.

Package Specifications

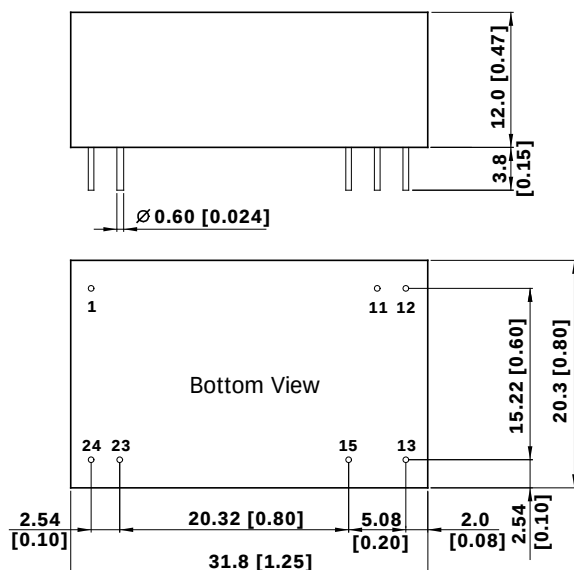Mechanical Dimensions



Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter $\varnothing 0.6 \pm 0.05$ (0.02±0.002)


Physical Characteristics

Case Size	: 31.8x20.3x12.0mm (1.25x0.80x0.47 inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Pin Material	: Tinned Copper
Weight	: 16g

Test Setup

Peak-to-Peak Output Noise Measurement Test

Refer to the output specifications or add 4.7 μ F capacitor if the output specifications undefine Cout. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

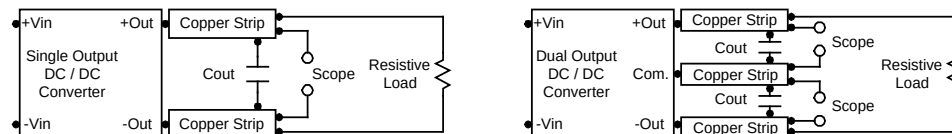

Technical Notes

Overload Protection


To provide hiccup mode protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure overload for an unlimited duration.

Overvoltage Protection

The output overvoltage clamp consists of control circuitry, which is independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop. This provides a redundant voltage control that reduces the risk of output overvoltage. The OVP level can be found in the output data.


Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor on the input to insure startup. By using a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 10 μ F for the 12V input devices and a 4.7 μ F for the 24V input devices and a 2.2 μ F for the 48V devices, capacitor mounted close to the power module helps ensure stability of the unit.

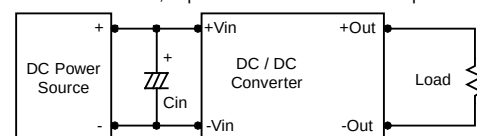

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

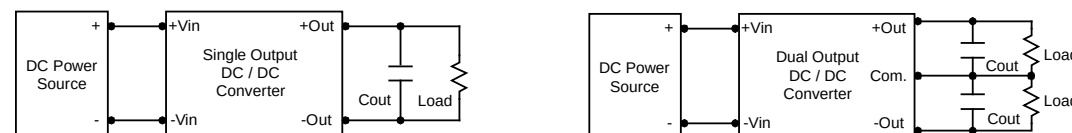


Maximum Capacitive Load

The MIW10M series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. Connect capacitors at the point of load for best performance. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105°C. The derating curves are determined from measurements obtained in a test setup.



The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com