


Technical Data Sheet

RRC-SMB-DBC – RRC SMBUS Dual Bay Battery Charger

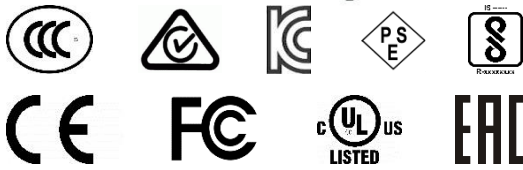

Dual SMBUS Desktop Universal Battery Charger for Smart Batteries

Features:

- Dual bay fast charger
- For the standard battery form factors RRC2020, 2024, 2040, 2040-2, 2054, 2054-2, 2057 or smart batteries with a similar footprint (e.g. 202x range, 204x range, 205x range, DR36, etc.)
- Optimized charging process for RRC batteries:
 - Longer cycle life
 - Faster charging
- Simple operation – Plug and Play
- Automatic recognition and calibration of smart battery learned capacity
- External power supply for worldwide use
- Country specific AC input cables available

Applications:

- Standard charging station for mobile devices used in medical, industrial and consumer markets

Specification RRC-SMB-DBC

Input	
Voltage range	19 - 26VDC
Current	3400mA max.
Power	65W

Output	
Voltage range	0 - 17.4VDC
Current range	0 - 4.8A
Voltage tolerance ⁽¹⁾	±1% max.
Current tolerance ⁽¹⁾	±10% max. @1A, ±3% max. @4A
Charge power	30W max. per Bay
Protection	Short circuit Over temperature shutdown Input-/output over current

Environmental	
Cooling	convection cooled
Temperature	Operating: 0°C to 40°C Non-operating -10°C to 70°C
Pressure & Altitude	Operating: 1060hPa to 795hPa -382m to 2000m Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5% to 95% r.H., non-condensing

General	
Efficiency ⁽²⁾	~95% at 100% load
Indicator	Multi-color LED (green, red, orange)
Battery types	Standard battery form factors RRC2020, 2024, 2040, 2040-2, 2054, 2054-2, 2057 or smart batteries with a similar footprint (e.g. 202x range, 204x range, 205x range, DR36, etc.)
Green procurement	RoHS 2011/65/EU WEEE 2012/19/EU Chinese RoHS



LED Indications	
One time Red/Orange/Green	Selftest: Charger is ready for use.
Red/Green blinking	Battery recognition and initialization.
Orange blinking	The battery is currently being calibrated.
Orange light	The inserted battery is of the correct type and is currently being charged.
Green light	The battery is charged and can be removed for use.
Red blinking	The battery is too hot or too cold to be charged without damage. If the battery is too cold it will be charged as soon as it has warmed up sufficiently. If the battery is too hot it should be removed to cool down.
Red light	The battery is damaged or it is a conventional battery which cannot be recharged.

Charger Mechanical Details	
Housing dimensions (LxWxH)	155 x 175 x 43mm
Weight	325 g (excluding power supply)

Notes:

1. Total regulation tolerance includes initial set accuracy, line and load regulation
2. Power losses of input and output cables are not considered here.

Technical Data Sheet

RRC-SMB-DBC – RRC SMBUS Dual Bay Battery Charger



Safety & EMC		
In combination with specified external AC/DC power supply		
Regulatory approvals	Europe	CE
	International	CB
Electromagnetic Emissions	Europe	EN55011, EN55032, level B
	USA	FCC15 class B
Electromagnetic Immunity	ESD immunity	EN/IEC61000-4-2
	Electromagnetic field immunity	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted Immunity	EN/IEC61000-4-6
	Magnetic Fields	EN/IEC61000-4-8
	Voltage dips, short instrumentations & voltage variations	EN/IEC61000-4-11
Immunity characteristics	EN55024	

Specification external AC/DC power supply

Input	
Voltage range	100 - 240VAC
Current	1.7A max.
Stand by power	No load < 0.5W @ 230 VAC

Output	
Voltage range	19VDC
Power	65W max.
Current range	3.4A
Protection	Over voltage, over current, Short circuit

Environmental	
Temperature	Operating: 0°C to 40°C
	Non-operating -10°C to 70°C

General	
Efficiency	California's Energy Efficiency Level VI
Ripple & Noise	300mV (p-p)

Power Supply Mechanical Details	
Standard output connector	DC barrel jack
Housing dimensions (LxWxH)	95 x 51 x 25.4mm
Weight	270g

Safety & EMC & Approvals		
Approvals	Europe	CE
	International	CB
	USA/Canada	cULus
	Australia	RCM
	Russia (Customs Union)	EAC
	Korea	KC
	China	CCC
	Japan	PSE
	India	BIS

Germany/Headquarters	USA	Hong Kong	China
RRC power solutions GmbH Technologiepark 1 D-66424 Homburg / Saar	RRC power solutions Inc. 18340 Yorba Linda Blvd., Suite 107-437 Yorba Linda, CA 92886-4104	RRC power solutions Ltd. S-V,6/F, Valiant Industrial Centre 2-12 Au Pui Wan Street Fo Tan, N.T., Hong Kong	RRC power solutions Ltd. Room 520, Yuanlin Building, Aiguo Road No. 3066, Luohu District, Shenzhen 518021
Tel.: +49 6841 98090 Fax: +49 6841 9809280 Email: sales@rrc-ps.de Web: www.rrc-ps.de	Tel.: +1 714 777 3604 Fax: +1 714 777 3658 Email: usa@rrc-ps.com Web: www.rrc-ps.com	Tel.: +852 2376 0106 Fax: +852 2375 0107 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com	Tel.: +86 755 8374 1908 Fax: +86 755 8374 1861 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)395 967 226
F: +39 (0)395 967 226
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com