
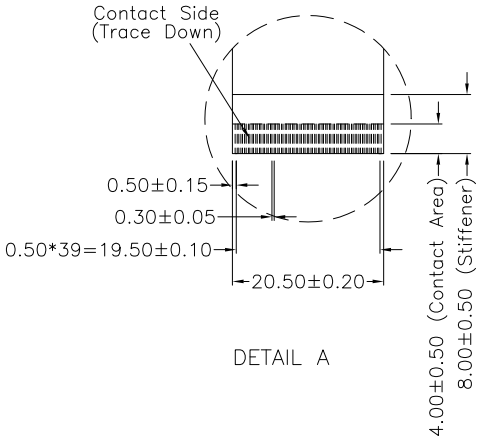
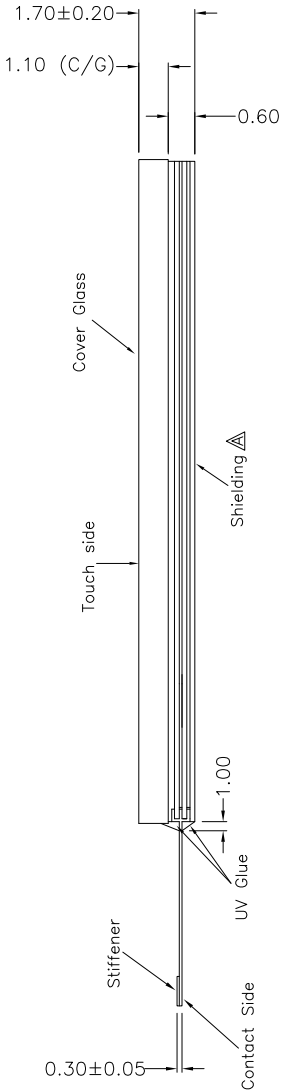


Touch Side View

CONNECTOR PINOUT	
PIN#	DESIGNATION
1	Shielding
2-3	Blank
4	Grounding Line
5	Blank
6	Grounding Line
7	Blank
8-37	X1-X30
38-39	Blank
40	Grounding Line
41-51	Blank
52	Grounding Line
53	Blank
54-76	Y1-Y23
77-79	Blank
80	Grounding Line

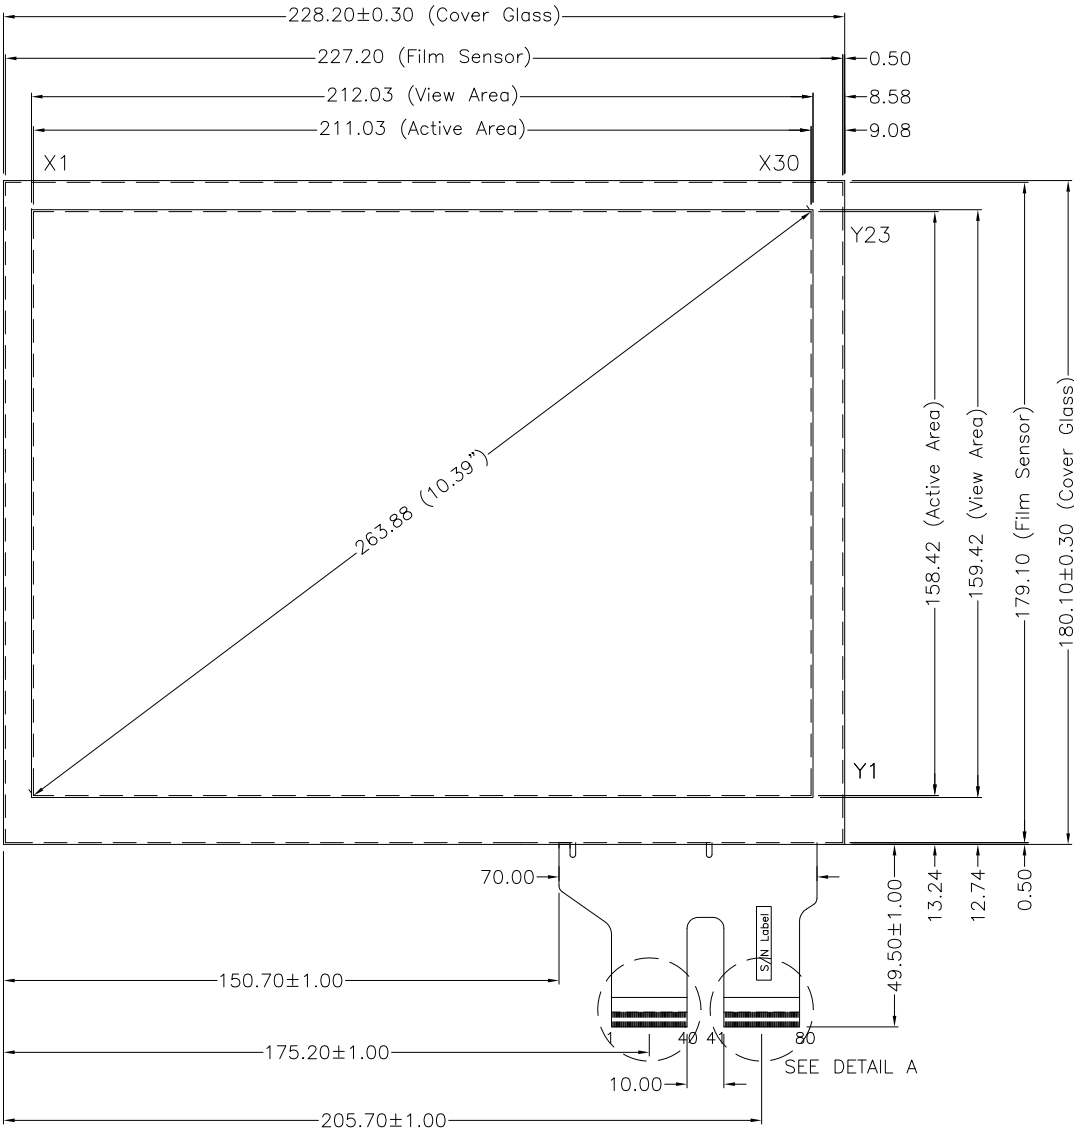

DETAIL A

- NOTES:
- 1. INPUT MODE : PROJECTED CAPACITIVE
 - 2. OVERALL THICKNESS : 1.70±0.20mm
 - 3. COVER GLASS THICKNESS : 1.10mm
 - 4. FRONT SURFACE : CLEAR TYPE
 - 5. TAIL TYPE : GOLD PLATED FPC , ZIF
 - 6. RECOMMENDED CONTROL BOARDS : PENMOUNT PM1300 SERIES
 - 7. OTHER SPEC : SEE APPROVAL SHEET

Distributed by:

www.texim-europe.com



A	SEP 22 , 2011	REMOVED Y AXIS ITO GROUNDING LINE AND EMI SHIELD FILM MODIFY	JERRY
NO.	DATE	DESCRIPTION	CHK
REVISION			
CHIEF OF DESIGN		APPROVED	Jerry
ENGINEER		PROJECT MANEGER	
DRAWN BY	Andre	DATE	NOV 11, 2011
SHT	1 OF 1	REV.	A
Apex Material Technology Corp.			
TOLERANCES UNLESS SPECIFIED			
.X	± 0.50	MODEL NAME : P3008-02	
.XX	± 0.50	DWG NO : P3008-02-1-01	
.XXX	± 0.30	SCALE: N/S UNIT: mm	
ANGULAR	.		