
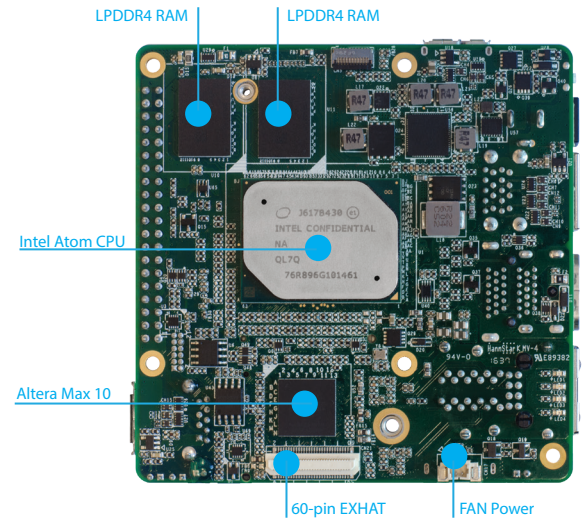


# UP<sup>2</sup>

bridge  
the gap

# specification

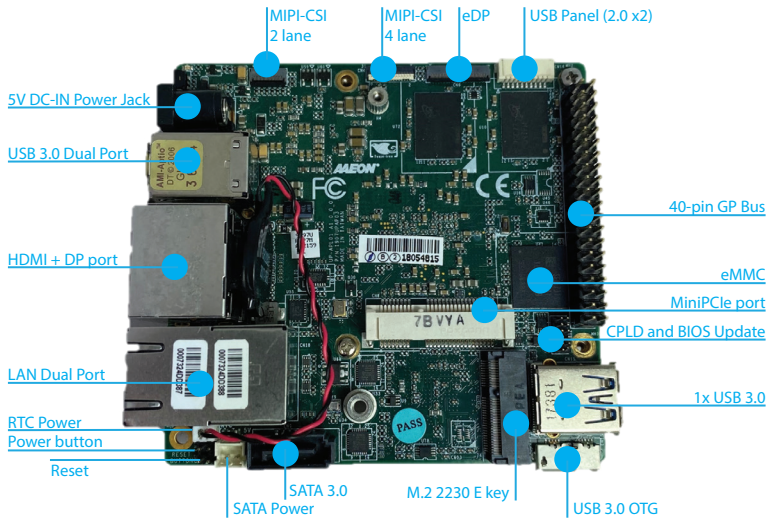

**UP<sup>2</sup> (UP Squared) is world's fastest maker board** with the high performance and low power consumption features of **Intel® Celeron™, Pentium™ and Atom™ Processors (codename Apollo Lake)**.

The internal GPU is the new **Intel Gen 9 HD with 12 / 18 Execution Units**, supporting **4K Codec Decode and Encode** for HEVC<sup>4</sup>, H.264 and VP8. Thanks to the Vector Units Image Processing Unit and Precision Timing Management to synchronize CPU with I/O, improved determinism (cache QoS, Intel Virtualization Technology), all the graphic processing is effortless to UP<sup>2</sup> (UP Squared).

UP<sup>2</sup> (UP Squared) comes with **2GB/4GB/8GB LPDDR4** and **32GB/64GB/128GB eMMC**. A **40-pin GP-bus** provides the freedom for makers to build up their module. Additionally, there is a **60-pin EXHAT** for embedded applications. This allows for the exploration of more possibilities. The expansion capabilities of UP<sup>2</sup> (UP Squared) goes much further than this. Native **mini-PCI-e, M.2 2230 and SATA3** are all built in on the board. What more could one desire?

The board supports **Windows 10, Windows IoT Core, Ubilinux, Ubuntu, Yocto and Android Marshmallow**. It's really UP to you to decide which operating system is best for your application. Now, all you need is an UP<sup>2</sup> (UP Squared) to begin your project!

## UP - Applications



Drones




Education



Robotics



Media Center

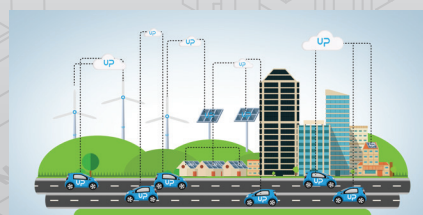

Internet of Things
























Home Automation

Distributed by [www.texim-europe.com](http://www.texim-europe.com)

[www.up-board.org](http://www.up-board.org) / [www.up-shop.org](http://www.up-shop.org) / [www.up-community.org](http://www.up-community.org)

# UP<sup>2</sup> - Specifications

        	<p><b>SOC</b> Intel® Celeron™ N3350 (up to 2.4 GHz) Intel® Pentium™ N4200 (up to 2.5 GHz) Intel® Atom™ X5-E3940 / X7-E3950</p> <p><b>Graphics</b> Intel® Gen 9 HD, supporting 4K Codec Decode and Encode for HEVC4, H.264, VP8</p> <p><b>Video &amp; Audio</b> HDMI 1.4b x1 4K @ 30 hz + DP 1.2 4K @ 60 hz I2S audio port</p> <p><b>Camera interface</b> MIPI-CSI2 2-lane (2MP) + MIPI-CSI2 4-lane ( 8MP)</p> <p><b>Display interface</b> eDP</p> <p><b>Power</b> 5V DC-in @ 4A-6A</p> <p><b>Operating humidity</b> 0% ~ 90% relative humidity, non-condensing</p> <p><b>Operating Temperature</b> 32-140°F / 0~60°C</p> <p><b>Altera MAX 10 FPGA</b> 2KLE --Celeron/ Pentium 4KLE -- ATOM</p>	          	<p><b>Memory</b> 2GB/4GB/8GB LPDDR4</p> <p><b>Storage Capacity</b> 32 GB / 64 GB / 128 GB eMMC</p> <p><b>USB</b> 3x UB3.0 (Type A) + 1x USB 3.0 OTG (Micro B) 2x USB2.0+2 X UART (Tx/Rx) debug port ( pin header)</p> <p><b>Ethernet</b> 2x Gb Ethernet (full speed, Realtek 8111G) RJ-45</p> <p><b>RTC</b> Yes</p> <p><b>Expansion</b> 40 pin General Purpose bus + 4-channel 12-bit A/D converter (500 kcps to 1 Msps) 60 pin EXHAT 1x mini-PCIe (full-size, auto switch to m-SATA) M.2 2230, SATA3</p> <p><b>Compatible Operating system</b> Microsoft Windows 10 (full), Windows IOT Core, Linux (ublinux, Ubuntu, Yocto), Android Marshmallow</p> <p><b>Dimensions</b> 3.37" x 3.54" / 85.60 mm x 90 mm</p> <p><b>Certificate</b> CE/FCC Class A, RoHS compliant, REACH</p>
---	--	---	--

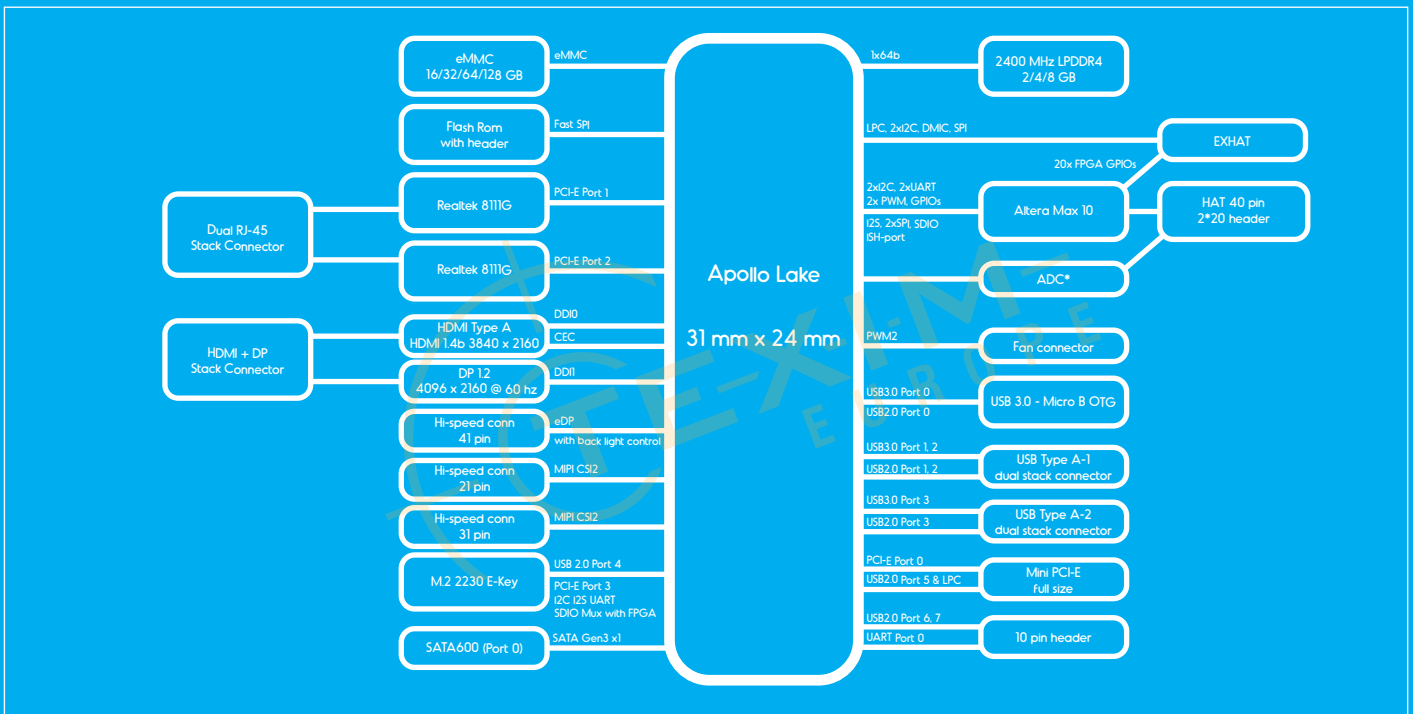

## UP<sup>2</sup> - Pinout

2	4	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40																																																												
1	3	5	7	9	11	13	15	17	19	21	23	25	27	29	31	33	35	37	39																																																												
1	3V3	2	5V	3	GPIO0/ I2C1_SDA	4	5V	5	GPIO1/ I2C1_SCL	6	Ground	7	GPIO2/ ADC*_in1	8	GPIO15/ UART_TXD	9	Ground	10	GPIO16/ UART_RXD	11	GPIO3/ UART_RTS/ SPI_2_FS1*/ ADC*_in2	12	GPIO17/ I2S_BCLK/ SPI_2_FS0*	13	GPIO4/ ADC*_in3	14	Ground	15	GPIO5/ ADC**_in4	16	GPIO18	17	3V3	18	GPIO19	19	GPIO6/ SPI_1_TXD	20	Ground	21	GPIO7/ SPI_1_RXD	22	GPIO20	23	GPIO8/ SPI_1_CLK	24	GPIO21/ SPI_1_FS0	25	Ground	26	GPIO22/ SPI_1_FS1	27	GPIO9/ I2C0_SDA	28	GPIO23/ I2C0_SCL	29	GPIO10	30	Ground	31	GPIO11	32	GPIO24/ PWM0	33	GPIO12/ PWM1	34	Ground	35	GPIO13/ I2S_WS_SYNC/ SPI_2_RXD*	36	GPIO25/ UART_CTS/ SPI_2_FS2*	37	GPIO14	38	GPIO26/ I2S_SDI/ SPI_2_TXD*	39	Ground	40	GPIO27/ I2S_SDO/ SPI_2_CLK*

\* 2nd SPI and ADC will be available only with E3940 SoC

UPS-APLC2-A20-0232  
RE-UPS-APLC2-A10-0432  
UPS-APLX5-A20-0432  
RE-UPS-APLX7-A10-0464  
RE-UPS-APLX7-A10-0464-VINO01

Celeron N3350 2GB memory/32GB eMMC  
Celeron N3350 4GB memory/32GB eMMC  
Atom x5-E3940 4GB memory/32GB eMMC  
Atom x7-E3950 4GB memory/64GB eMMC  
Atom x7-E3950 4GB memory/64GB eMMC with Ubuntu Image

RE-UPS-APLP4-A10-0432  
UPS-APLP4-A10-0864  
UPS-APLP4-A20-08128  
RE-UPS-APLP4-A10-0864-VN01

Pentium N4200 4GB memory/32GB eMMC  
Pentium N4200 8GB memory/64GB eMMC  
Pentium N4200 8GB memory/128GB eMMC  
Pentium N4200 8GB memory/64GB eMMC with Ubuntu Image

Distributed by [www.texim-europe.com](http://www.texim-europe.com)

[www.up-board.org](http://www.up-board.org) / [www.up-shop.org](http://www.up-shop.org) / [www.up-community.org](http://www.up-community.org)

Microsoft, Windows, Windows IOT Core, Linux, Ubuntu, Yocto, Android Marshmallow, Intel, Intel logo, Intel Insider, Intel SpeedStep, and Atom are trademarks of Intel Corporation in the United States and/or other countries. Intel, the Intel logo, Intel Insider, Intel SpeedStep, and Atom are trademarks of Intel Corporation in the U.S. and/or other countries. All rights reserved. UP Bridge The Gap is Trademark of Aaeon Europe. All Rights reserved.



## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: info@texim-europe.com  
Homepage: www.texim-europe.com



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
E: uk@texim-europe.com



### Germany - North

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: germany@texim-europe.com



### Germany - South

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
E: austria@texim-europe.com



### Nordic

Søndre Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
E: nordic@texim-europe.com



### Italy

Via Matteotti 43  
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 9713293  
E: italy@texim-europe.com