


V: 2023.04

A7672 Series

SIMCom LTE Cat 1 Module

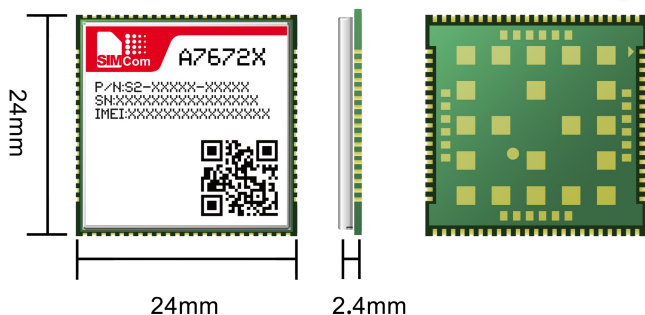


Product Description

Based on ASR1603 platform, A7672 series is the LTE Cat 1 module that supports wireless communication modes of LTE-FDD/LTE-TDD#/GSM#/GPRS#/EDGE#. It supports maximum 10Mbps downlink rate and 5Mbps uplink rate.

A7672 series adopts LCC+LGA form factor and is compatible with SIM7000/SIM7070 series (NB/Cat M modules), and SIM800A/SIM800F series (2G modules), which enables smooth migration from 2G/NB/Cat M products to LTE Cat 1 products, and greatly facilitates more compatible product design for the customer needs.

A7672 series supports both multiple built-in network protocols and the drivers for main operation systems (USB driver for Windows, Linux and Android). The software functions, AT commands are compatible with the SIM800 series modules. A7672 series also can support BLE# and GNSS# and it integrates abundant industrial standard interfaces with powerful expansibility, such as UART, USB, I2C and GPIO, which makes it perfectly suitable for main IOT applications such as telematics, POS, surveillance devices, industrial routers, and remote diagnostics etc.

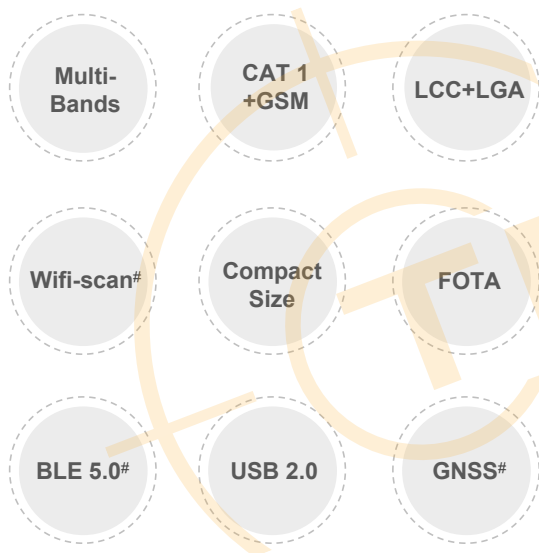

Key Benefits

- ◆ Compact size with abundant interfaces
- ◆ Supports BLE, Wifi-scan and GNSS functions#
- ◆ Abundant software functions: FOTA, SSL
- ◆ Form factor is compatible with the SIM7000/SIM7070 series

Distributed by:



Product	A7672E	A7672SA	A7672S	A7672G
Form Factor	LCC+LGA	LCC+LGA	LCC+LGA	LCC+LGA
Dimensions(mm)	24.0*24.0*2.4	24.0*24.0*2.4	24.0*24.0*2.4	24.0*24.0*2.4
Frequency Bands	LTE-FDD	B1/B3/B5/B7/B8/B20/B28#	B1/B3/B5/B8	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66
	LTE-TDD	NA	NA	B38/B39/B40/B41
	GSM	GSM/GPRS/EDGE 900/1800 MHz	GSM/GPRS/EDGE 900/1800 MHz	GSM/GPRS/EDGE 900/1800 MHz
Temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Features				
Supply Voltage(V)	3.4~ 4.2	3.4~ 4.2	3.4~ 4.2	3.4~ 4.2
Power Consumption(mA)	1.5@LTE	1.5@LTE	1.5@LTE	1.5@LTE
Data Transfer				
LTE(Mbps)	10(DL)/5(UL)	10(DL)/5(UL)	10(DL)/5(UL)	10(DL)/5(UL)
EDGE(Kbps)	236.8(DL/UL)	236.8(DL/UL)	236.8(DL/UL)	236.8(DL/UL)
GPRS(Kbps)	85.6(DL/UL)	85.6(DL/UL)	85.6(DL/UL)	85.6(DL/UL)
Software Features				
Protocol	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS/MQTT	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS/MQTT	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS/MQTT	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/ FTPS /HTTP/HTTPS/DNS/MQTT
TLS	•	•	•	•
Jamming Detection	○	○	○	○
TTS	○	○	○	○
File System	•	•	•	•
WIFISCAN	○	○	•	•
BLE 5.0	○	○	○	NA
FOTA	•	•	•	•
Android RIL	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)	•	•	•	•
ECM	•	•	•	•
Embedded AT	○	○	○	○
Firmware Upgrade	USB/FOTA	USB/FOTA	USB/FOTA	USB/FOTA
Interfaces				
SIM Card	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART	•	•	•	•
USB	•	•	•	•
ADC	•	•	•	•
Analog audio	•	•	•	•
PCM	○	○	○	○
GPIO	•	•	•	•
I2C	•	•	•	•
GNSS	○	○	○	NA
LCD	•	•	•	•
Camera	•	•	•	•
Certification				
Certification	RoHS/REACH/CE-RED/ RCM/UKCA*/NCC/ GCF*/Deutsche Telekom/BT	RoHS/REACH/CE-RED/ RCM/NCC/FCC/Anatel		RoHS/REACH/CE-RED/FCC/Anatel*

• : support ○#: optional * : means under developing/on-going/planning

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

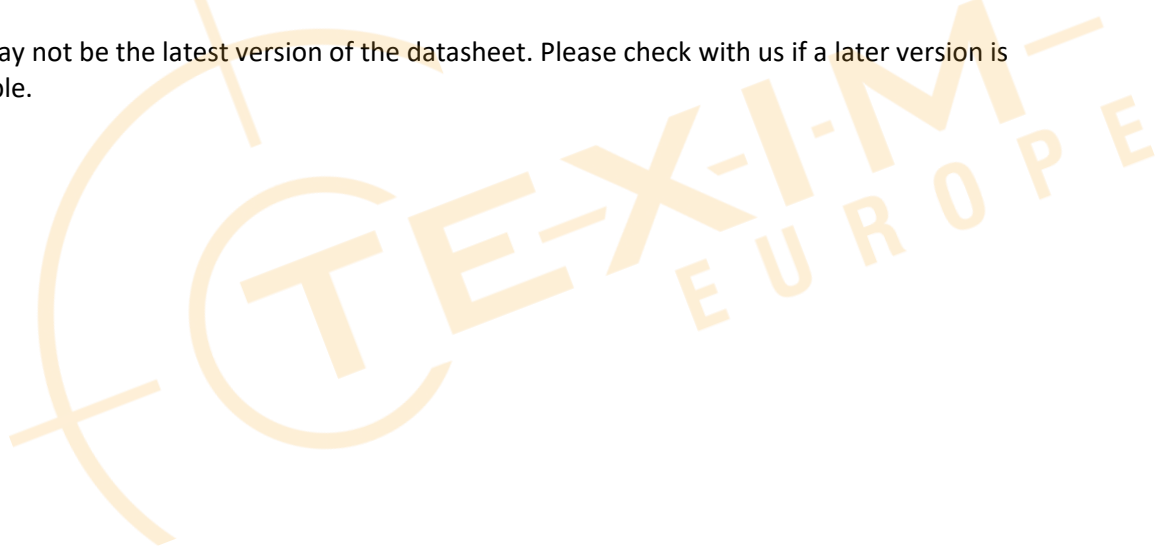



Headquarters & Warehouse

Elektrostraat 17
 NL-7483 PG Haaksbergen
 The Netherlands

T: +31 (0)53 573 33 33
 E: info@texim-europe.com
 Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
 E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
 B-1731 Zellik

T: +32 (0)2 462 01 00
 E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
 Carlton Le Moorland
 Lincoln LN5 9HS

T: +44 (0)1522 789 555
 E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
 D-25451 Quickborn

T: +49 (0)4106 627 07-0
 E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
 D-81829 München

T: +49 (0)89 436 086-0
 E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
 A-5020 Salzburg

T: +43 (0)662 216 026
 E: austria@texim-europe.com



Nordic

Stockholmsgade 45
 2100 Copenhagen

T: +45 88 20 26 30
 E: nordic@texim-europe.com



Italy

Via Matteotti 43
 IT-20864 Agrate Brianza (MB)

T: +39 (0)39 9713293
 E: italy@texim-europe.com