



深圳市一众显示科技有限公司

SHEN ZHEN TEAM SOURCE DISPLAY TECH. CO, LTD.

# TFT-LCD Module Specification

Distributed by:



**Module NO.: TST070WSBE-61**

**Version: V1.0**

☐ APPROVAL FOR SPECIFICATION

☐ APPROVAL FOR SAMPLE

**For Customer' s Acceptance:**

| Approved by | Comment |
|-------------|---------|
|             |         |

**Team Source Display:**

| Presented by | Reviewed by | Organized by |
|--------------|-------------|--------------|
|              |             |              |

| Version No. | Date      | Content         | Remark |
|-------------|-----------|-----------------|--------|
| V1.0        | 2020-5-28 | Initial Release |        |
|             |           |                 |        |

**CONTENTS**

|                                                  |               |
|--------------------------------------------------|---------------|
| <b>1 GENERAL CHARACTERISTICS.....</b>            | <b>- 3 -</b>  |
| <b>2 PRODUCT DRAWINGS.....</b>                   | <b>- 4 -</b>  |
| <b>3 INTERFACE DESCRIPTION.....</b>              | <b>- 5 -</b>  |
| 3.1 LCM INTERFACE DESCRIPTION.....               | - 5 -         |
| <b>4 TIMING CHARACTERISTICS.....</b>             | <b>- 8 -</b>  |
| 4.1 TTL INTERFACE TIMING.....                    | - 8 -         |
| <b>5 ABSOLUTE MAXIMUM RATINGS.....</b>           | <b>- 10 -</b> |
| <b>6 ELECTRICAL CHARACTERISTICS.....</b>         | <b>- 10 -</b> |
| <b>7 BACKLIGHT CHARACTERISTICS.....</b>          | <b>- 10 -</b> |
| <b>8 LCD OPTICAL SPECIFICATIONS.....</b>         | <b>- 11 -</b> |
| <b>9 RELIABILITY TEST.....</b>                   | <b>- 13 -</b> |
| <b>10 SUGGESTIONS FOR USING LCD MODULES.....</b> | <b>- 13 -</b> |
| 10.1 HANDLING OF LCM.....                        | - 13 -        |
| 10.2 STORAGE.....                                | - 14 -        |


## 1 General Characteristics

| ITEM                           | Specification                            | Unit              |
|--------------------------------|------------------------------------------|-------------------|
| LCD Type                       | a-Si TFT,Transmissive,Normally black,IPS | -                 |
| LCD Size                       | 7.0                                      | inch              |
| Resolution (W x H)             | 1024x (RGB) × 600                        | pixel             |
| LCMoutline size                | 164.9(H) x 100(V) x5.4(T)                | mm                |
| Active Area                    | 154.21 (H) x 85.92 V)                    | mm                |
| Dot Pitch                      | 0.0642(H) × 0.1790(V)                    | mm                |
| Viewing Direction              | ALL o'clock                              | -                 |
| Gray Scale Inversion Direction | ALL o'clock                              | -                 |
| Color Depth                    | 16.7M                                    | -                 |
| Pixel Arrangement              | RGB-stripe                               | -                 |
| Backlight Type                 | 27 LEDs, 360mA                           | -                 |
| Surface Luminance              | 850(Min),1000(TYP)                       | cd/m <sup>2</sup> |
| Lens Surface Treatment         | Clear                                    | -                 |
| LCD Driver IC                  | EK79001HF+EK73215BCGA                    | -                 |
| Interface Type                 | RGB (TTL)                                | -                 |
| Input Voltage                  | 3.3                                      | V                 |
| With/Without TP                | Without                                  | -                 |
| Weight                         | TBD                                      | g                 |

**Note 1: RoHS compliant**

**Note 2: LCM weight tolerance: ± 5%.**

## 2 Product drawings

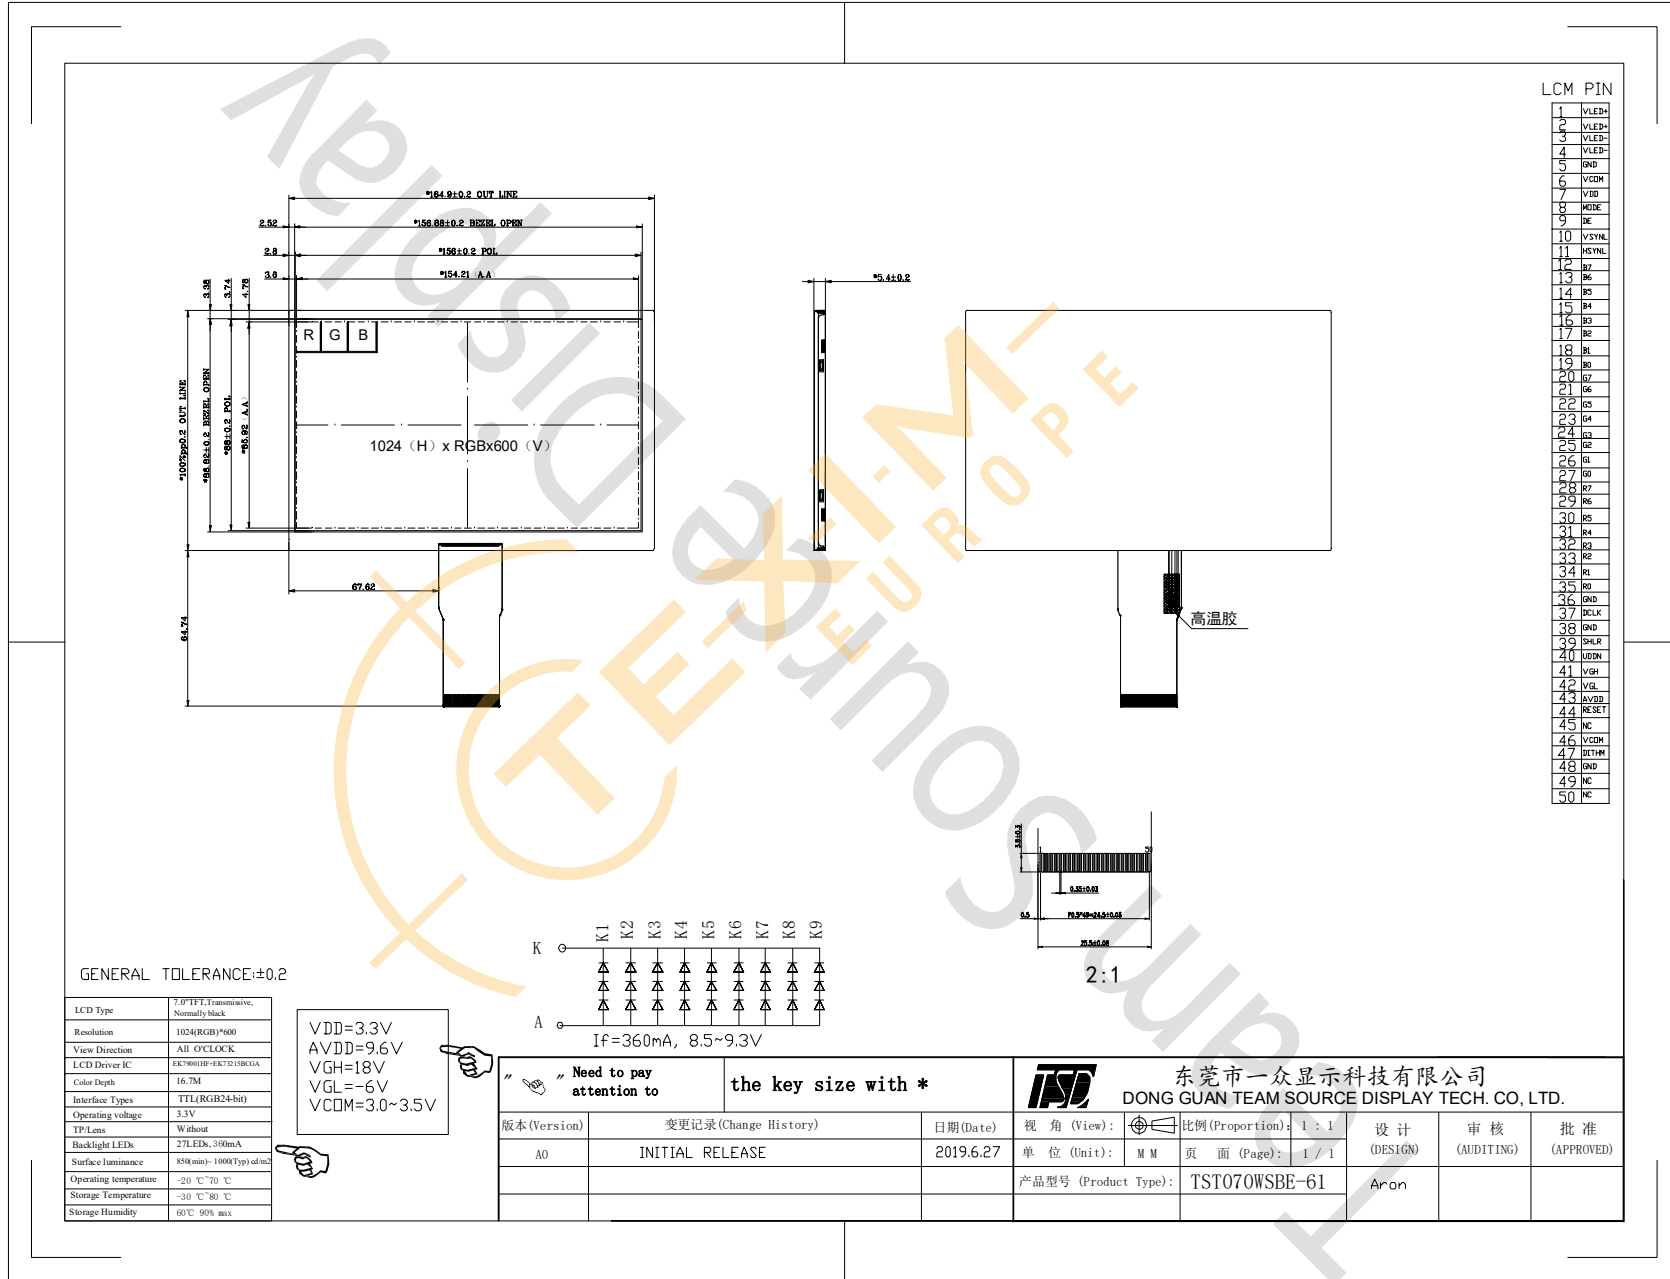

### 3 Interface description

#### 3.1 LCM interface description

| Pin No. | Symbol            | I/O | Function                          | Remark |
|---------|-------------------|-----|-----------------------------------|--------|
| 1       | V <sub>LED+</sub> | P   | Power for LED backlight (Anode)   |        |
| 2       | V <sub>LED+</sub> | P   | Power for LED backlight (Anode)   |        |
| 3       | V <sub>LED-</sub> | P   | Power for LED backlight (Cathode) |        |
| 4       | V <sub>LED-</sub> | P   | Power for LED backlight (Cathode) |        |
| 5       | GND               | P   | Power ground                      |        |
| 6       | V <sub>COM</sub>  | I   | Common voltage                    |        |
| 7       | V <sub>DD</sub>   | P   | Power for Digital Circuit         |        |
| 8       | MODE              | I   | DE/SYNC mode select               | Note 1 |
| 9       | DE                | I   | Data Input Enable                 |        |
| 10      | VS <sub>YNC</sub> | I   | Vertical Sync Input               |        |
| 11      | HS <sub>YNC</sub> | I   | Horizontal Sync Input             |        |
| 12      | B7                | I   | Blue data(MSB)                    |        |
| 13      | B6                | I   | Blue data                         |        |
| 14      | B5                | I   | Blue data                         |        |
| 15      | B4                | I   | Blue data                         |        |
| 16      | B3                | I   | Blue data                         |        |
| 17      | B2                | I   | Blue data                         |        |
| 18      | B1                | I   | Blue data                         | Note 2 |
| 19      | B0                | I   | Blue data(LSB)                    | Note 2 |
| 20      | G7                | I   | Green data(MSB)                   |        |
| 21      | G6                | I   | Green data                        |        |
| 22      | G5                | I   | Green data                        |        |
| 23      | G4                | I   | Green data                        |        |
| 24      | G3                | I   | Green data                        |        |
| 25      | G2                | I   | Green data                        |        |
| 26      | G1                | I   | Green data                        | Note 2 |

|    |                  |   |                          |          |
|----|------------------|---|--------------------------|----------|
| 27 | G0               | I | Green data(LSB)          | Note 2   |
| 28 | R7               | I | Red data(MSB)            |          |
| 29 | R6               | I | Red data                 |          |
| 30 | R5               | I | Red data                 |          |
| 31 | R4               | I | Red data                 |          |
| 32 | R3               | I | Red data                 |          |
| 33 | R2               | I | Red data                 |          |
| 34 | R1               | I | Red data                 | Note 2   |
| 35 | R0               | I | Red data(LSB)            | Note 2   |
| 36 | GND              | P | Power Ground             |          |
| 37 | DCLK             | I | Sample clock             | Note 3   |
| 38 | GND              | P | Power Ground             |          |
| 39 | SHLR             | I | Left / right selection   | Note 4,5 |
| 40 | UDDN             | I | Up/down selection        | Note 4,5 |
| 41 | V <sub>GH</sub>  | P | Gate ON Voltage          |          |
| 42 | V <sub>GL</sub>  | P | Gate OFF Voltage         |          |
| 43 | AV <sub>DD</sub> | P | Power for Analog Circuit |          |
| 44 | RESET            | I | Global reset pin.        | Note 6   |
| 45 | NC               | - | No connection            |          |
| 46 | V <sub>COM</sub> | I | Common Voltage           |          |
| 47 | DITHB            | I | Dithering function       | Note 7   |
| 48 | GND              | P | Power Ground             |          |
| 49 | NC               | - | No connection            |          |
| 50 | NC               | - | No connection            |          |

I: input, O: output, P: Power

Note 1: DE/SYNC mode select. Normally pull high.

When select DE mode, MODE="1", VS and HS must pull high.

When select SYNC mode, MODE="0", DE must be grounded.

Note 2: When input 18 bits RGB data, the two low bits of R,G and B data must be grounded.


Note 3: Data shall be latched at the falling edge of DCLK.

Note 4: Selection of scanning mode

| Setting of scan control input |                  | Scanning direction        |
|-------------------------------|------------------|---------------------------|
| U/D                           | L/R              |                           |
| GND                           | DV <sub>DD</sub> | Up to down, left to right |
| DV <sub>DD</sub>              | GND              | Down to up, right to left |
| GND                           | GND              | Up to down, right to left |
| DV <sub>DD</sub>              | DV <sub>DD</sub> | Down to up, left to right |

Note 5: Definition of scanning direction.

Refer to the figure as below:

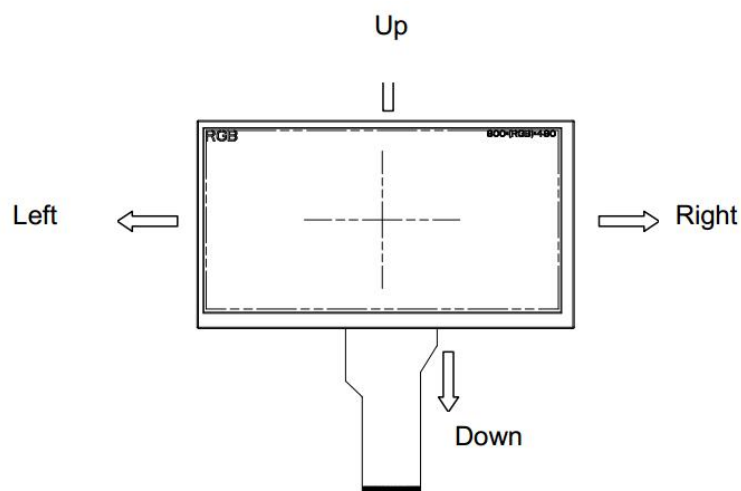

Note 6: Global reset pin. Active low to enter reset state. Suggest to connect with an RC reset circuit for stability. Normally pull high.


Note 7: Dithering function enable control, normally pull high.

When DITHB="1", Disable internal dithering function,


When DITHB="0", Enable internal dithering function,

## 4 Timing Characteristics

### 4.1 TTL Interface Timing

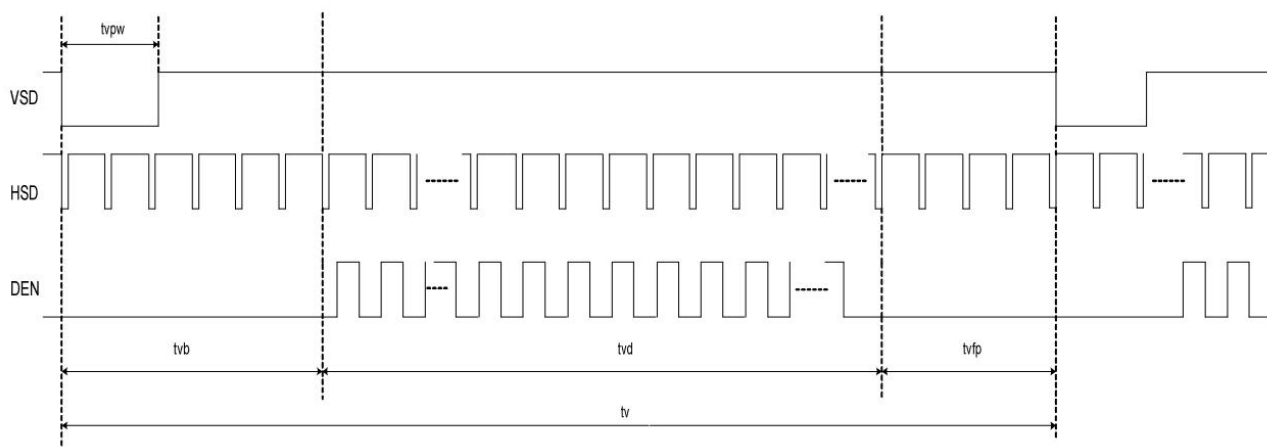

Vertical input timing

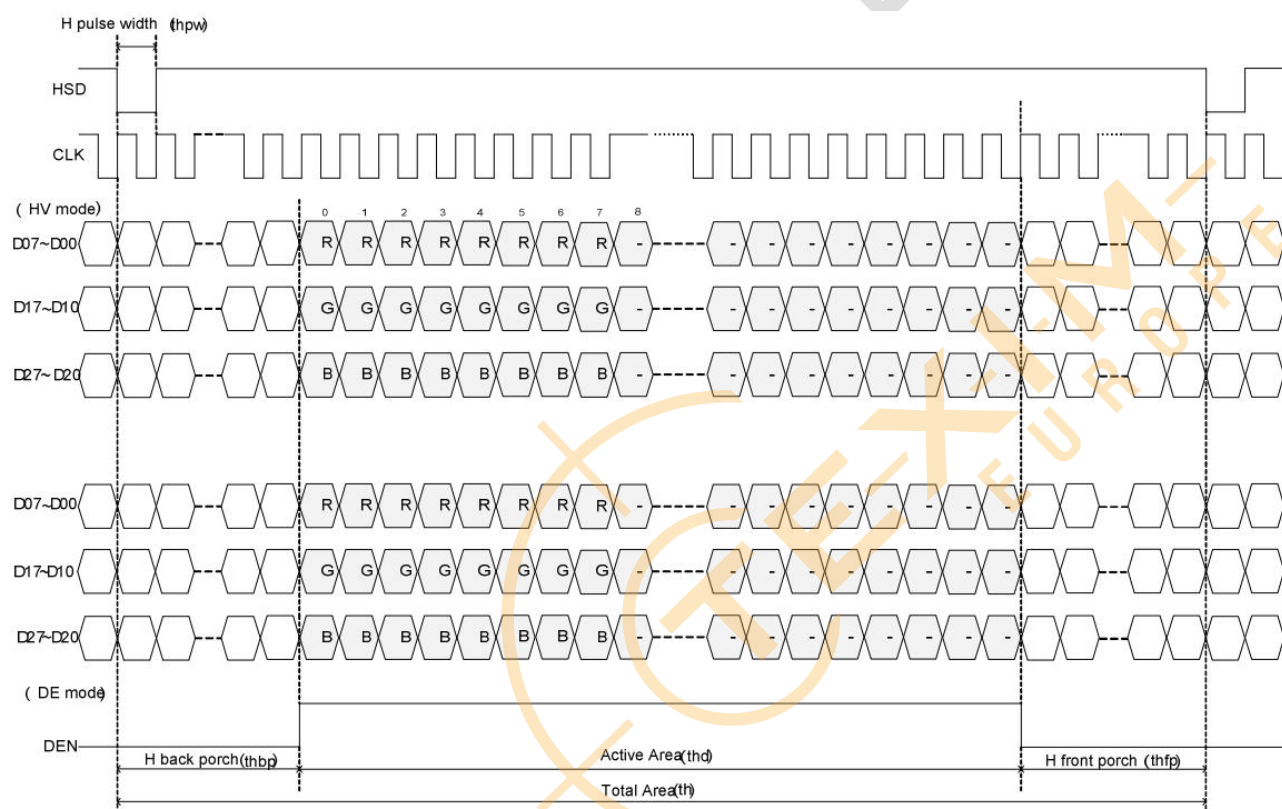

Horizontal input timing

| DE mode                         |          |       |      |      |      |
|---------------------------------|----------|-------|------|------|------|
| Parameter                       | Symbol   | Value |      |      | Unit |
|                                 |          | Min.  | Typ. | Max. |      |
| DCLK frequency @Frame rate=60hz | fclk     | 40.8  | 51.2 | 67.2 | Mhz  |
| Horizontal display area         | thd      | 1024  |      |      | DCLK |
| HSYNC period time               | th       | 1114  | 1344 | 1400 | DCLK |
| HSYNC blanking                  | thb+thfp | 90    | 320  | 376  | DCLK |
| Vertical display area           | tvd      | 600   |      |      | H    |
| VSYNC period time               | tv       | 610   | 635  | 800  | H    |
| VSYNC blanking                  | tvb+tvfp | 10    | 85   | 200  | H    |

HV mode

Horizontal input timing

| Parameter                       |      | Symbol | Value |      |      | Unit |
|---------------------------------|------|--------|-------|------|------|------|
| Horizontal display area         |      | thd    | 1024  |      |      | DCLK |
| DCLK frequency@ Frame rate=60hz |      | fclk   | Min.  | Typ. | Max. | Mhz  |
|                                 |      |        | 44.9  | 51.2 | 63   |      |
| 1 Horizontal Line               |      | th     | 1200  | 1344 | 1400 | DCLK |
| HSYNC pulse width               | Min. | thpw   | 1     |      |      |      |
|                                 | Typ. |        | —     |      |      |      |
|                                 | Max. |        | 140   |      |      |      |
| HSYNC back porch                |      | thbp   | 160   | 160  | 160  |      |
| HSYNC front porch               |      | thfp   | 16    | 160  | 216  |      |

| Vertical input timing |        |       |      |      |      |
|-----------------------|--------|-------|------|------|------|
| Parameter             | Symbol | Value |      |      | Unit |
|                       |        | Min.  | Typ. | Max. |      |
| Vertical display area | tvd    | 600   |      |      | H    |
| VSYNC period time     | tv     | 624   | 635  | 750  | H    |
| VSYNC pulse width     | tvpw   | 1     | —    | 20   | H    |
| VSYNC back porch      | tvb    | 23    | 23   | 23   | H    |
| VSYNC front porch     | tvfp   | 1     | 12   | 127  | H    |

## 5 Absolute Maximum Ratings

| PARAMETER                 | SYMBOL | MIN  | MAX            | UNIT |
|---------------------------|--------|------|----------------|------|
| Supply Voltage for Analog | VDD    | -0.5 | 5.0            | V    |
| Operating Temperature     | TOP    | -20  | 70             | ° C  |
| Storage Temperature       | TST    | -30  | 80             | ° C  |
| Humidity                  | RH     | -    | 90%(Max 60° C) | RH   |

## 6 Electrical Characteristics

| PARAMETER                | SYMBOL | MIN  | TYP | MAX  | UNIT |
|--------------------------|--------|------|-----|------|------|
| Analog operating voltage | VDD    | 2.3  | 3.3 | 3.6  | V    |
| Power supply input       | AVDD   | 8.0  | 9.6 | 13.5 | V    |
| Input Current            | IDD    | -    | TBD | -    | mA   |
| Gate on voltage          | VGH    | 17   | 18  | 19   | V    |
| Gate off voltage         | VGL    | -5.5 | -6  | -6.5 |      |
| Input signal voltage     | VCOM   | 3.0  | 3.2 | 3.5  |      |

## 7 Backlight Characteristics

| ITEM                      | SYMBOL         | MIN   | TYP   | MAX | UNIT |
|---------------------------|----------------|-------|-------|-----|------|
| Voltage for LED backlight | V <sub>f</sub> | 8.5   | 9.0   | 9.3 | V    |
| Current for LED backlight | I <sub>f</sub> | -     | 360   | -   | mA   |
| Power consumption         | Wbl            | -     | 3240  | -   | mW   |
| Uniformity                | Avg            | 75    | -     | -   | %    |
| LED Life Time             | -              | 30000 | 40000 | -   | Hrs  |

Note:

- 1.The LED life time is defined as the module brightness decrease to 50% original brightness at Ta=25°C, 60%RH ±5 %.
2. The life time of LED will be reduced if LED is driven by high current, high ambient temperature and humidity conditions.
3. Typical operating life time is an estimated data.
4. Permanent damage to the device may occur if maximum values are exceeded or reverse voltage is loaded .Functional operation should be restricted to the conditions described under normal operating conditions.

## 8 LCD Optical specifications

| Item                         | Symbol | Condition          | Specification |       |       | Unit | Remark     |
|------------------------------|--------|--------------------|---------------|-------|-------|------|------------|
|                              |        |                    | Min           | Typ   | Max   |      |            |
| Response time (By Quick)     | Tr+Tf  | $\theta = 0^\circ$ | -             | 25    | 40    | ms   | Note 5     |
| Contrast ratio               | CR     | $\theta = 0^\circ$ | -             | 800   | -     |      | Note 2,6   |
| Viewing angle                | Top    | $CR \geq 10$       | 80            | 85    | -     | Deg. | Note 2,6,7 |
|                              | Bottom | $CR \geq 10$       | 80            | 85    | -     |      |            |
|                              | Left   | $CR \geq 10$       | 80            | 85    | -     |      |            |
|                              | Right  | $CR \geq 10$       | 80            | 85    | -     |      |            |
| Color chromaticity (CIE1931) | Wx     | $\theta = 0^\circ$ | 0.274         | 0.304 | 0.334 |      | Note 3     |
|                              | Wy     |                    | 0.305         | 0.335 | 0.365 |      |            |
|                              | Rx     |                    |               | -     |       |      |            |
|                              | Ry     |                    |               | -     |       |      |            |
|                              | Gx     |                    |               | -     |       |      |            |
|                              | Gy     |                    |               | -     |       |      |            |
|                              | Bx     |                    |               | -     |       |      |            |
|                              | By     |                    |               | -     |       |      |            |
| NTSC                         |        |                    | -             | 50%   | -     |      | Note 3     |

Note 1: Ambient temperature = 25°C.


Note 2: To be measured with a viewing cone of 2° by Topcon luminance meter BM-7.

Note 3: To be measured with Otsuta chromaticity meter LCF-2100M, CF only measure under C light simulation.

Note 4: BOE shipping status is cell without polarizer. Transmittance of Specification is cell with polarizer.  
The tolerance of Transmittance is  $\pm 10\%$ .

Note 5: Definition of response time:

The output signals of TRD-100 are measured when the input signals are changed to "White" (falling time) and from "White" to "Black" (rising time), respectively. The interval is between the 10% and 90% of amplitudes. Refer to figure as below.

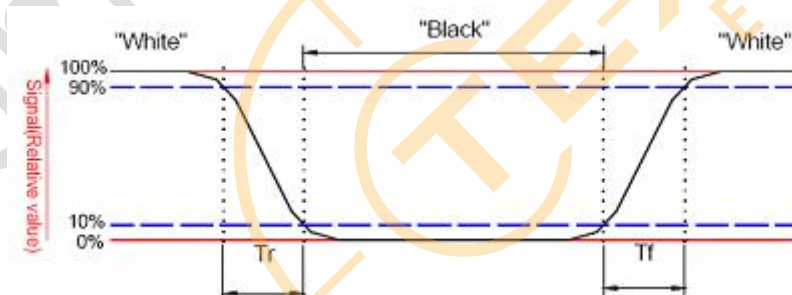


Note 6: Definition of contrast ratio:


Contrast ratio is calculated by the following formula.

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "white" state}}{\text{Brightness on the "black" state}}$$


Note 7: Definition of viewing angle

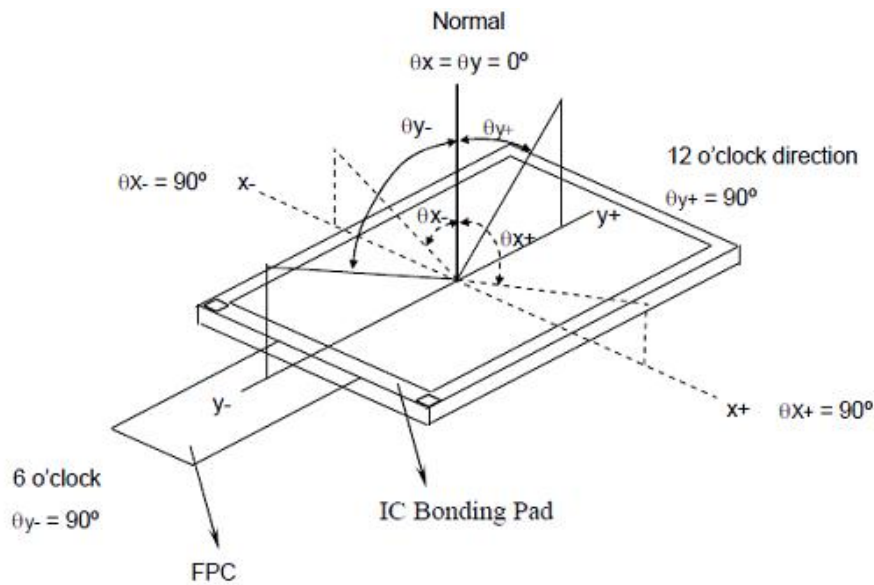

Note 8: Optical characteristic measurement setup.

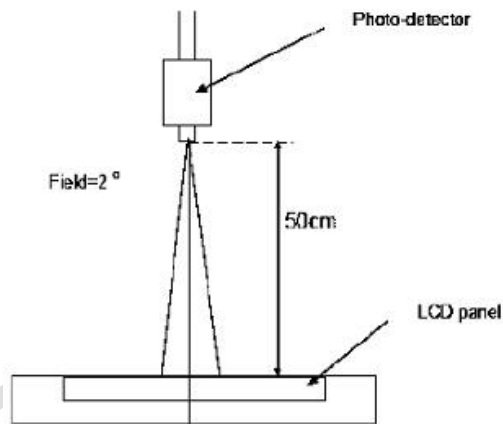

Note 9:

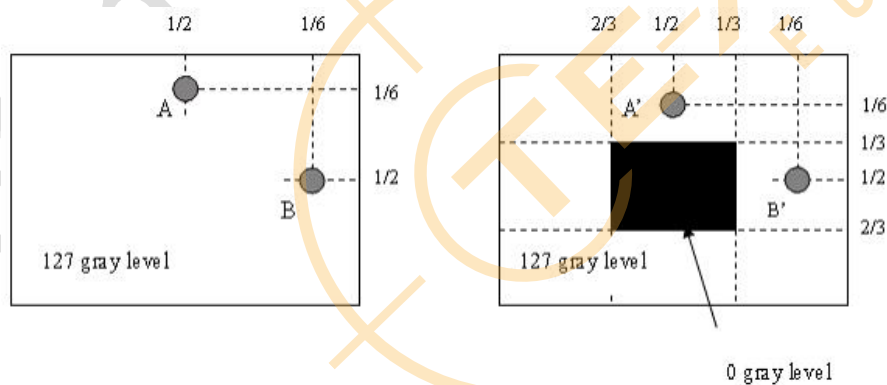

$1 \text{ LA-LA}' / \text{LA} \times 100\% = 2\% \text{ max.}$ , LA and LA' are brightness at location A and A'.

$1 \text{ LB-LB}' / \text{LB} \times 100\% = 2\% \text{ max.}$ , LB and LB' are brightness at location B and B'.

## 9 RELIABILITY TEST

| NO. | TEST ITEM                    | TEST CONDITION                                                              | INSPECTION AFTER TEST                                                                                                                         |
|-----|------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | High Temperature Storage     | 80±2°C/96 hours                                                             | Inspection after 2~4 hours storage at room temperature and humidity. The condensation is not accepted. The sample shall be free from defects: |
| 2   | Low Temperature Storage      | -30±2°C/96 hours                                                            |                                                                                                                                               |
| 3   | High Temperature Operating   | 70±2°C/96 hours                                                             |                                                                                                                                               |
| 4   | Low Temperature Operating    | -20±2°C/96 hours                                                            |                                                                                                                                               |
| 5   | Temperature Cycle            | -30±2°C ~ 25~ 80± 2°C × 10 cycles<br>(30 min.) (5min.) (30min.)             | 1. Air bubble in the LCD<br>2. Seal leak<br>3. Non-display<br>4. Missing segments<br>5. Glass crack                                           |
| 6   | Damp Proof Test              | 60°C ±5°C × 90%RH/96 hours                                                  |                                                                                                                                               |
| 7   | Packing Drop Test            | Height: 60 cm<br>1 corner, concrete floor                                   |                                                                                                                                               |
| 8   | Electrostatic Discharge Test | C=150pF, R=330 Ω<br>Air: ±8KV 150pF/330Ω 30 times<br>Contact: ±4KV,20 times |                                                                                                                                               |

## 10 Suggestions for using LCD modules

### 10.1 Handling of LCM

1. The LCD screen is made of glass. Don't give excessive external shock, or drop from a high place.
2. If the LCD screen is damaged and the liquid crystal leaks out, do not lick and swallow. When the liquid is attach to your hand, skin, cloth etc, wash it off by using soap and water thoroughly and immediately.
3. Don't apply excessive force on the surface of the LCM.
4. If the surface is contaminated, clean it with soft cloth. If the LCM is severely contaminated, use Isopropyl alcohol/Ethyl alcohol to clean. Other solvents may damage the polarizer. The following solvents is especially prohibited: water , ketone Aromatic solvents etc.
5. Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
6. Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
7. Don't disassemble the LCM.
8. To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
  - Be sure to ground the body when handling the LCD modules.
  - Tools required for assembling, such as soldering irons, must be properly grounded.
  - To reduce the amount of static electricity generated, do not conduct assembling and other work under dry conditions.
  - The LCD module is coated with a film to protect the display surface. Exercise care when peeling

off this protective film since static electricity may be generated.

9. Do not alter, modify or change the the shape of the tab on the metal frame.
10. Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
11. Do not damage or modify the pattern writing on the printed circuit board.
12. Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector
13. Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
14. Do not drop, bend or twist LCM.

## 10.2 Storage

1. Store in an ambient temperature of 5 to 45 °C, and in a relative humidity of 40% to 60%. Don't expose to sunlight or fluorescent light.
2. Storage in a clean environment, free from dust, active gas, and solvent.
3. Store in antistatic container.



## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

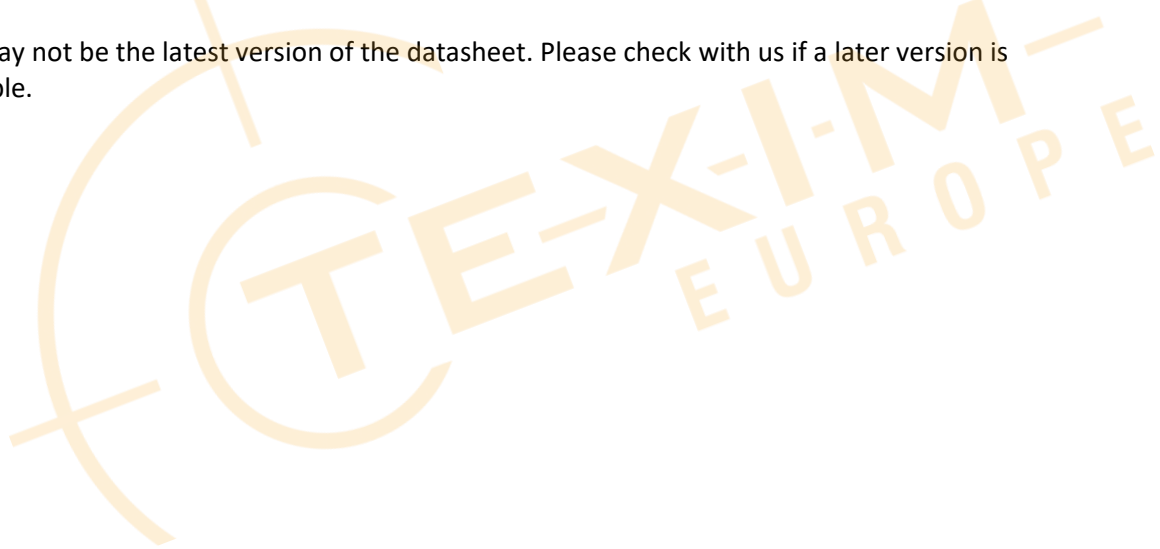



## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: [info@texim-europe.com](mailto:info@texim-europe.com)  
Homepage: [www.texim-europe.com](http://www.texim-europe.com)



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)



### Germany - North

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)



### Germany - South

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: [muenchen@texim-europe.com](mailto:muenchen@texim-europe.com)



### Austria

Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)



### Nordic

Søndre Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)



### Italy

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: [italy@texim-europe.com](mailto:italy@texim-europe.com)