



Features

- Solid Aluminum Die-casting chassis
- Front bezel IP65
- VGA/DVI input
- 9~36V DC wide range power input

Specifications

LCD

Display Type	7" TFT-LCD
Max. Resolution	800x480
Max. Color	262K
Luminance (cd/m ²)	350
View Angle	H:140° / V:110°
Backlight Lifetime	40,000 hrs
Contrast	400:1
Power Consumption	2.4W

System

OSD Control	5 keys
Membrane	
External I/O Port	1 x VGA, 1 x DVI USB interface for touch RS-232 for resistive touch 1x tack switch for VGA/DVI switching 1x Line in by phone jack for option 3 pins terminal block
Power Input	9~36V DC
Touch Screen	107P: Projected Capacitive 107: Resistive Touch Window
Light Transmission	ARCDIS-107P: 90% ARCDIS-107: 80%

Mechanical


Construction	Aluminum Die-casting chassis
IP Rating	IP65 front panel
Mounting	Panel mounting, VESA 75 x 75
Dimension(mm)	202 x 149 x 39
Net Weight(Kgs)	1.0

Environmental

Operating Temperature	0~50 °C
Storage Temperature	-20~60 °C
Storage Humidity	10 to 90% @ 40°C, Non-condensing
Certificate	CE/FCC Class A

Dimension

ARCDIS-107

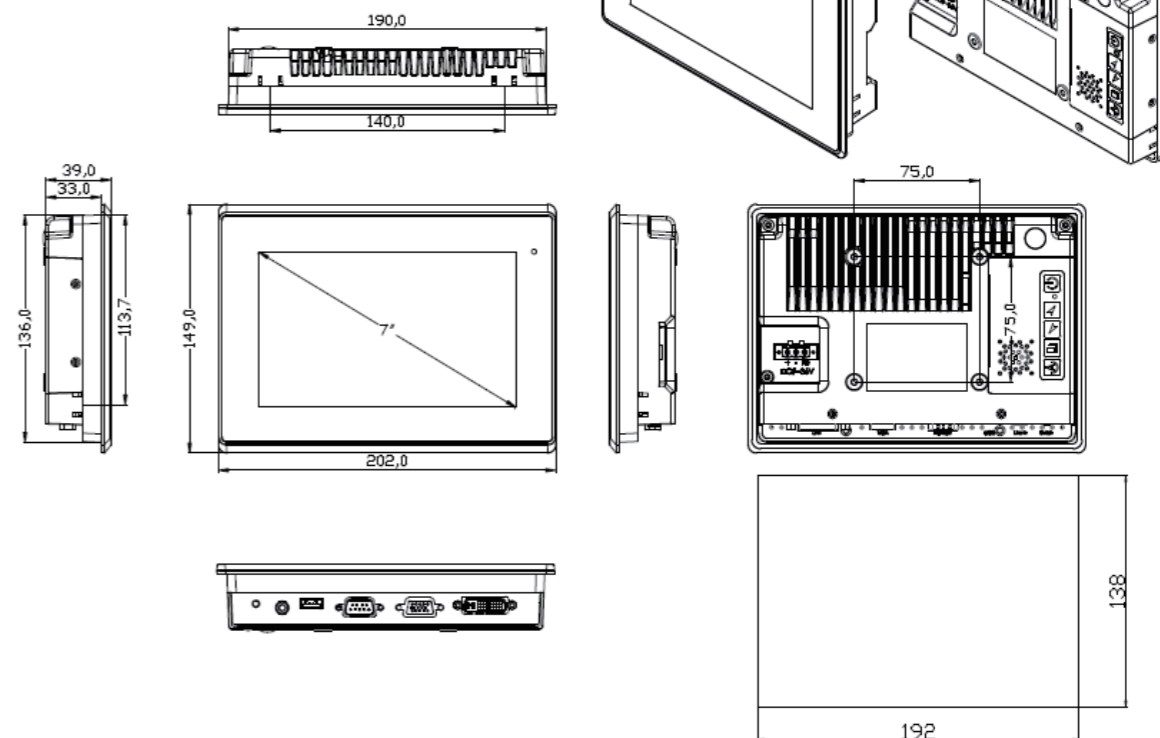

Mounting Hole Size

Distributed by:



www.texim-europe.com