

**IEC320-C7 (EU)**

Country of Origin : China  
 Operating Temperature : 0 ÷ 40 [°C]  
 Length/cord : 1.8m / 2x0.75mm2  
 Approvals : VDE 


Application	For Class II. Appliances	
WEIGHT / PACKING	1pc	N.W.: 84g / pc
	Box	0.56 x 0.36 x 0.20 [m]
		200pcs / 1box
		G.W.: 17.7 kg / box



**IEC320-C7 (UK)**

Country of Origin : China  
 Operating Temperature : 0 ÷ 40 [°C]  
 Length/cord : 1.8m / 2x0.75mm2  
 Approvals : ASTA 

Application	For Class II. Appliances	
UL Plug	The British Standards 1363 plug (13A Plug) IS 401 and IS 411 (Ireland), MS 589 (Malaysia) and SS 145 (Singapore), and SASO 2203 (Saudi Arabia).	
Fuse	5A / 250V	
WEIGHT / PACKING	1pc	N.W.: 120g / pc
	Box	0.56 x 0.36 x 0.20 [m]
		100pcs / 1box
		G.W.: 14 kg / box

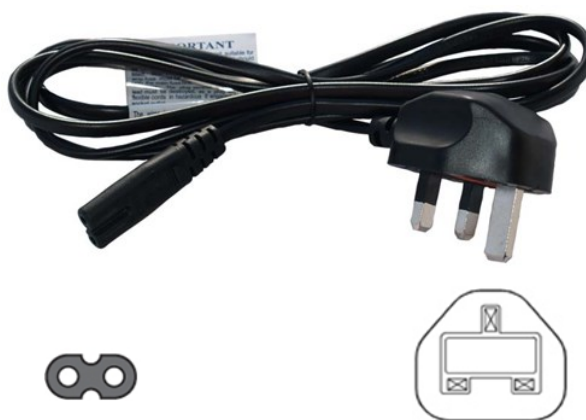

**IEC320-C7 (UL)**

Country of Origin : China  
 Operating Temperature : 0 ÷ 40 [°C]  
 Length/cord : 1.8m / 2x0.75mm2  
 Approvals : UL 

Application	For Class II. Appliances	
UL Plug	American standard NEMA 1-15	
WEIGHT / PACKING	1pc	N.W.: 72g / pc
	Box	0.56 x 0.36 x 0.20 [m]
		200pcs / 1box
		G.W.: 15.5 kg / box



**IEC320-C7 (Aus)**

Country of Origin : China  
 Operating Temperature : 0 ÷ 40[°C]  
 Length/cord : 1.8m / 2x0.75mm2  
 Approvals : SAA 

Application	For Class II. Appliances	
AUS Plug	Australia's standard AS/NZS 3112:2004	
WEIGHT / PACKING	1pc	N.W.: 113 g / pc
	Box	0.56 x 0.36 x 0.20 [m]
		150pcs / 1box
		G.W.: 17.5 kg / box

