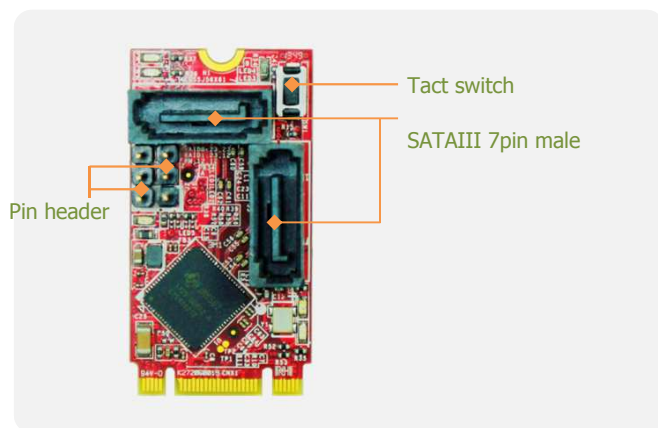
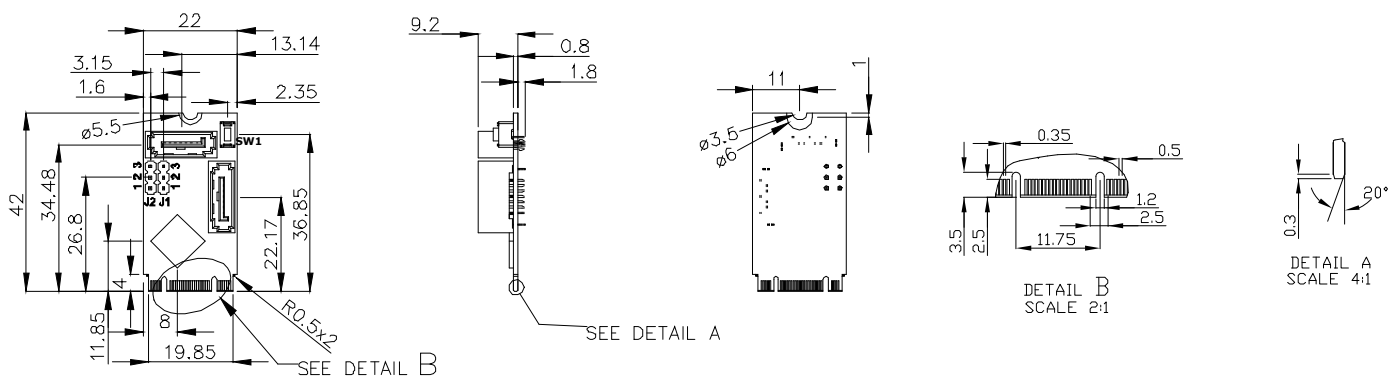


**Features**

- Supports SATA to dual SATA III Port Multiplier.
- Supports H/W RAID 0/1 over SATA.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

**Mechanical Drawing****Specifications****Headquarters (Taiwan)**

5F., No. 237, Sec. 1, Datong Rd.,  
Xizhi Dist., New Taipei City 221,  
Taiwan  
Tel: +886-2-77033000  
Email: sales@innodisk.com

**Branch Offices:****USA**

[usasales@innodisk.com](mailto:usasales@innodisk.com)

+1-510-770-9421

**Europe**

[eusales@innodisk.com](mailto:eusales@innodisk.com)

+31-040-282-1818

**Japan**

[jpsales@innodisk.com](mailto:jpsales@innodisk.com)

+81-45-594-7581

**China**

[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)

+86-755-21673689

[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

May 22, 2015

|                   |                                                                                                                  |
|-------------------|------------------------------------------------------------------------------------------------------------------|
| Form-Factor       | M.2 2242-B-M                                                                                                     |
| Input I/F         | SATA III                                                                                                         |
| Output I/F        | SATA III                                                                                                         |
| Output Connector  | SATA 7pin x 2                                                                                                    |
| Bridge            | JMS562                                                                                                           |
| TDP               | 1.65W (3.3V x 498mA)                                                                                             |
| Dimension (WxLxH) | 22 x 42 x 11mm, Weight: 5.5g                                                                                     |
| Temperature       | Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C                                                               |
| Environment       | Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms                                                                      |
| Notes             | 1. RAID Mode Setting:<br>[J2:J1]<br>RAID0: 23:23, RAID1: 23:12, PM: 12:12<br>2. Press tact switch SW1 for reset. |