



REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02D

PAGE : 1

**SPECIFICATIONS FOR APPROVAL**

**PRODUCT NAME** : Touch Sensor Module with Control Board (55")

**LGIT MODEL NAME** : TSTD-DR02A

**Customer P/N** :

APPROVAL		
LG Innotek Co., Ltd.		
Drafter	Quality Team Agreement	Final Approver

Appendix

REG. DATE : 2015.04.02

**S P E C I F I C A T I O N**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : **2**

**Content**

**Revision History ..... 3**

**1. General Description ..... 4**

**2. Specification ..... 6**

**3. Control Board ..... 7**

**4. Inspection Standard ..... 9**

**5. Packing ..... 10**

**6. Cautions & Warranty ..... 11**



REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : **4**

## 1. General Description

### 1-1. General Feature

	Item	Spec	Remark
Window Glass	Viewing Area	1214.6mm x 685.4mm	View Area 55 inch
	Out Dimension Size	1257.5mm x 736.1mm	
	Thickness	5.0mm	
	Material	Sodalime	Thermal Strengthened
	Deco Printing	Black	
	Printing Hole	-	
	AG coating	Yes	Gloss 90~130unit
	Chamfer	C0.8±0.2	
	Protection Film	-	
	Logo	-	
	Silk	-	
Touch Sensor	Type	GFF, 2 mesh sensor(PET)	
	Sensor Size	1241.52mm X 716.27mm	
	Thickness	0.365mm	without Protect Film
	Sensing Type	Mutual Capacitance 2 layer	
	Channel No.	Rx(Top) : 127 Tx(Bottom) : 72	Trace single routing
	Protection Film	Yes (0.050t or 0.075t)	
Control Board	Response Time	16ms	1~10point / CH141*78 / Repot rate 240Hz)
	Accuracy	±1.5mm	
	Separation	Min20mm	Between 2-Points
FPCB	Type	COB Type	
	Connector	ZIF Type	FH30 Series
	Size	Rx : 307.51mm x 95mm Tx : 340.86mm x 56.5mm	
	Layer	Single Layer	

REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0






REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : **5**

**1. General Description**

**1-2. Stack up**

No	Structure	Feature
1		Window Glass
2		Top OCA
3		Top Sensor
4		Bottom OCA
5		Bottom Sensor

REG. DATE : 2015.04.02

**S P E C I F I C A T I O N**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

 PAGE : **6**

## 2. Specification

### 2-1. Electrical Specification Drawing Test

### 2-2. Optical Specification

Feature	Specification
Transmittance (%)	Typ. 83% (Min 81%)
Haze	Typ. 4% (Max 6%)

### 2-3. Reference LCD Condition

Feature	Specification
Resolution	1920 x 1080 (FHD)
LCD Active Area(Size)	55"

REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0


REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : 7

**4. Control Board**

**4-1. Outline Dimension**

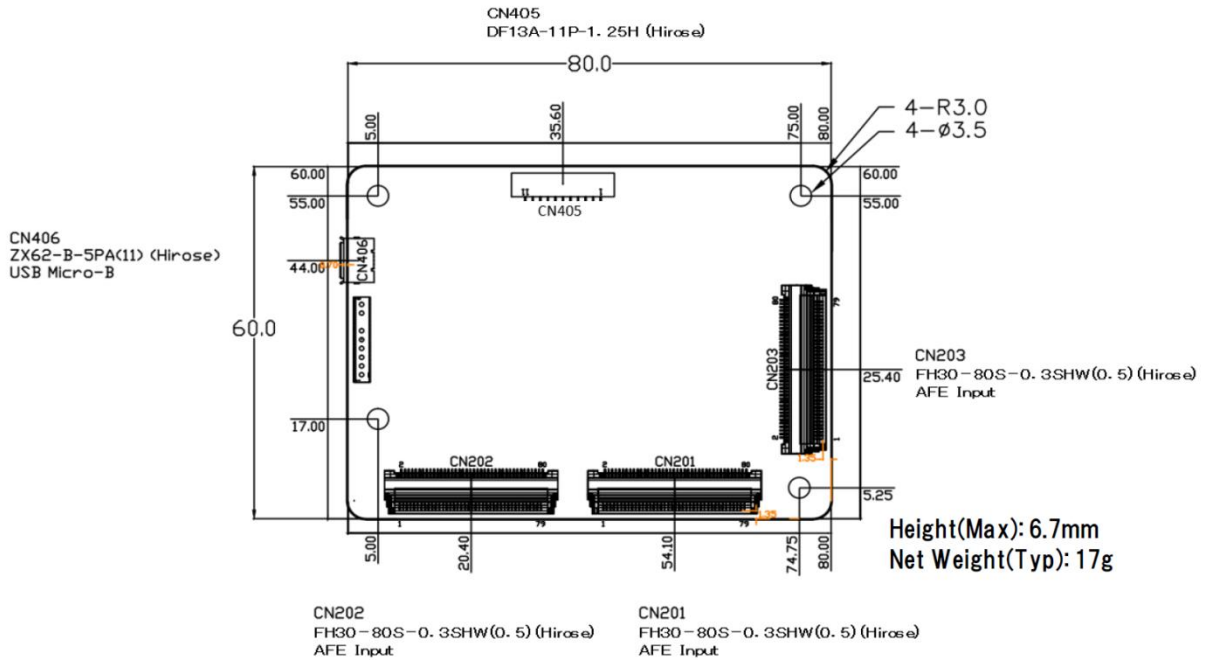

Material Construction

			unit: mm	
	Material	thickness(Typ)		
solder resist	solder resist	0.020		
L1 Conductor	copper + copper plating	0.035		L1 Conductor
L1-L2 Adhesive	prepreg	0.130		L2 Conductor
L2 Conductor	base + copper	0.018		L3 Conductor
L2-L3 base		0.600		L4 Conductor
L3 Conductor		0.018		
L3-L4 Adhesive	prepreg	0.130		
L4 Conductor	copper + copper plating	0.035		
solder resist	solder resist	0.020		
Final thickness		1.006 ± 10%		

3D view

REG. DATE : 2015.04.02

**S P E C I F I C A T I O N**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : **8**

**4-3. Sharp Touch controller support OS(via USB)**

	OS	Support	Driver	Remark
<b>Windows</b>	Windows 7	√	Windows USB/HID driver	
	Windows 8/8.1	√	Windows USB/HID driver	
<b>Linux</b>	Ubuntu 12.04	√	Linux USB/HID driver	-Kernel version 3.8 or above -Driver configuration might be modified to attach appropriate driver module.
	Ubuntu 13.04	√	Linux USB/HID driver	-Kernel version 3.8 or above -Driver configuration might be modified to attach appropriate driver module.
	Others			Contact us
<b>Android</b>	Gingerbread (2.3)	√	Available with custom HID driver provided by SHARP	
	Ice Cream Sandwich (4.0)	√	Android USB/HID driver	Driver configuration might be modified to attach appropriate driver module.
	Jelly Bean (4.3)	√	Android USB/HID driver	Driver configuration might be modified to attach appropriate driver module.
	KitKat (4.4)	√	Android USB/HID driver	Driver configuration might be modified to attach appropriate driver module.



REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0

REV. DATE : 2015.04.02


MODEL NAME : TSTD-DR02A

PAGE : 9

**5. Inspection Standard**

**5-1. Cosmetic Inspection Condition**

- Luminance : 600 ± 200 lux (diffused light source)
- Distance(With the unaided eye) : 1000 ± 200mm
- Light source : D65 (White-6,500K)
- Measurement method : With the unaided eye or the magnifying glass
- Viewing Angle : 90° (vertical)
- Duration : Up to 30 ~ 45sec

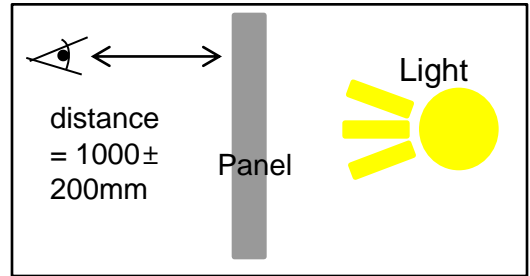

**5-2. Cosmetic Inspection Standard**

Item	Area	Judgment	55inch	Remarks
Circular defect ( $D = (L + W) / 2$ )	Active/Print	Ignore	$D \leq 0.7$	
		OK	$0.7 < D \leq 1.3\text{mm} : 10\text{ea}$	
		NG	$D > 1.3\text{mm}$	
Linear defect	Active/Print	Ignore	$W \leq 0.2\text{mm}$ and $L \leq 25\text{mm}$	
		OK	$0.2 < W \leq 0.3\text{mm}$ and $25 < L \leq 50\text{mm} : 10\text{ea}$	
		NG	$W > 0.3\text{mm}$ or $L > 50\text{mm}$	
Circular defect ( $D = (L + W) / 2$ )	Active/Print	Ignore	$D \leq 0.7$	Bubble included
		OK	$0.7 < D \leq 1.8\text{mm} : 10\text{ea}$	
		NG	$D > 1.8\text{mm} : \text{NG}$	
Chipping (Corner, Side)	Print/Edge	OK	$D \leq 0.5\text{mm} : \text{OK}$	
		NG	$D > 0.5\text{mm} : \text{NG}$	
Dent	Active/Print	OK	Should not be viewed from the front, during inspection	
Window Stain	Active/Print		Acceptable if removable	
Mis Printing/Scratch	Glass out of edge	OK	L : Ignore, $W \leq 2.0\text{mm}$	
Pin Hole	Print	Ignore	$\leq 0.2\text{mm}$	
		OK	$0.2\text{mm} < \text{Pin hole} \leq 0.8\text{mm} : 16\text{pcs}$	
		NG	$> 0.6\text{mm}$	
Protect film			Protect film defect Ignore	

REG. DATE : 2015.04.02

**SPECIFICATION**

REV.NO : 1.0

REV. DATE : 2015.04.02


MODEL NAME : TSTD-DR02A

PAGE : **10**

## 6. Packing

### Packing Information

- Box Size : 1388 x 325 x 844mm
- PE Form : 4pcs / 1-Box
- 3pcs / 1 Box

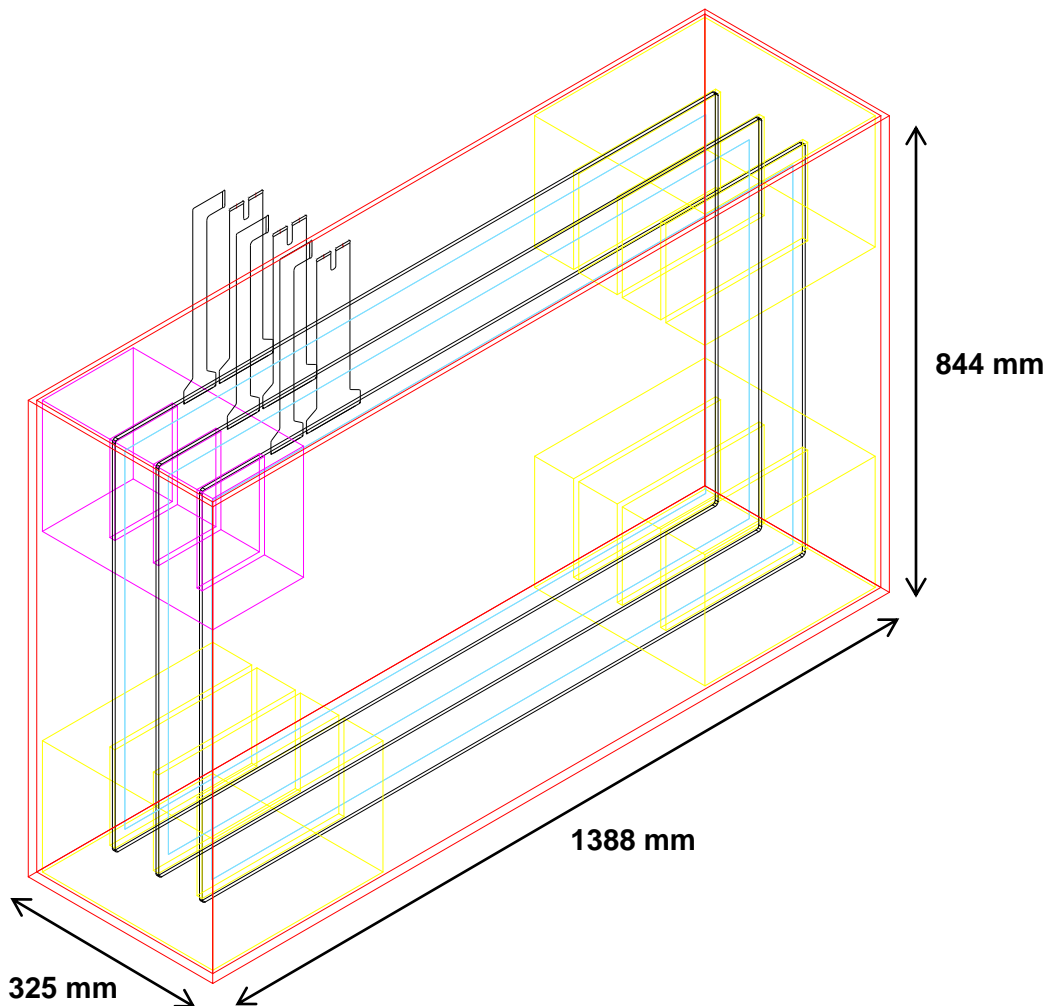

< Package Dimension >

REG. DATE : 2015.04.02

**S P E C I F I C A T I O N**

REV.NO : 1.0

REV. DATE : 2015.04.02

MODEL NAME : TSTD-DR02A

PAGE : **11**



**Cautions & Warranty**

**⚠ Please pay attention to the following when you use this Touch Sensor Panel.**

1) Storage

When storing the TSP(Touch Sensor Panel)s as spares for a long time, the following precautions are necessary.

- Store the TSPs in a dark place. Do not expose the TSPs to sunlight. Keep the temperature between 5℃ and 30℃ at normal humidity.

2) Protection Film

- When the protection film is peeled off, static electricity is generated between the protection film and the TSP's transparent electrical film(Ag Mesh PET film). This should be peeled off slowly and carefully by people who are electrically grounded and the well ion-blower equipment or in such a condition, etc.
- When the TSP with protection film attached is stored for a long time, sometimes there remains a small amount of glue still on the TSP's transparent electrical film(Ag Mesh PET film) after the protection film is peeled off.
- You can remove the glue easily. When the glue remains on the TSP's transparent electrical film(Ag Mesh PET film) surface or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with ethyl-acetate.

3) Electrostatic Discharge Control

- Since the TSP is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wrist band etc.

4) Installing and Assembling

- Do not touch, push or rub the exposed TSP's film with glass, tweezers or anything harder than 3H pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of film for bare hand or greasy cloth. (Some cosmetics deteriorate the film.)
- When the surface becomes dusty, please wipe gently with absorbent cotton or other soft material like chamois soaked with ethyl-acetate. Do not use acetone and toluene.
- Do not put a heavy, hard or sharp objects on the TSP.
- Do not apply excessive forces to the FPCB.

**⚠ Warranty**

Touch Sensor Panel products shall be warranted for one year after shipping from LG Innotek Co. Ltd. (Storage condition : Between 5℃ and 30℃ at normal humidity)

## The Netherlands



Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
F: +31 (0)53 573 33 30  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)

## Belgium



Zuiderlaan 14 bus 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
F: +32 (0)2 462 01 25  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)

## UK & Ireland



St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
F: +44 (0)845 299 22 26  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)

## Germany North



Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
F: +49 (0)4106 627 07-20  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Germany South



Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
F: +49 (0)89 436 086-19  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Austria



Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
F: +43 (0)662 216 026-66  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)

## Nordic region



Sdr. Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
F: +45 88 20 26 39  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)

## General information



[info@texim-europe.com](mailto:info@texim-europe.com)  
[www.texim-europe.com](http://www.texim-europe.com)