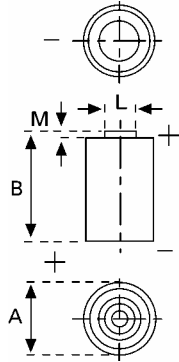


Data Sheet


Type Number 6215
Designation IEC CR 17345
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... MH13654.(N)
Nominal Voltage 3 V
Typical Capacity C 1500 mAh
 Load 200 Ohm, at 20°C down to 2 V

Weight (approx.) 16 g
Volume 7 ccm
Coding..... Date of Manufacturing Quarter / Year

Temperature Ranges

	min	max.
Storage	-30 °C	65 °C
Discharge	-20 °C	65 °C

Dimensions

	min	max.
Diameter (A)	16	17
Height (B)	32,4	33,9
Shoulder Diameter[L].....	6,1	
Shoulder Height [M].....	1	

Segment Electronic

Main Applications Photo
 Electronic Devices

Typical Capacities (at 20 °C)

Discharge Type	Load	End Voltage:	2.0 V
Continuous 24h/d,7d/w	200 Ω	Time:	108 h
		Capacity [mAh]:	1500
		Energy [mWh]:	4190



The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com