


# Technical Data Sheet

## RRC-SCC1120 – Single Cell Charger 1120

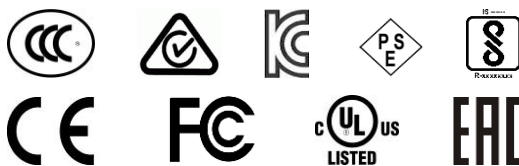

### 5 Watt Desktop Battery Charger for RRC1120

#### Features:

- Single bay charger
- For the standard battery RRC1120
- Optimized charging process for RRC battery:
  - Longer cycle life
- Simple operation – Plug and Play
- External wall plug power supply for worldwide use

#### Applications:

- Standard charging station for mobile devices used in medical, industrial and consumer markets

### Specification RRC-SCC1120

Input	
Voltage	5V nom.
Current	1000mA nom.
Power	5W

Output	
Voltage	4.2VDC
Current max.	1A
Voltage tolerance <sup>(1)</sup>	±1% max.
Current tolerance <sup>(1)</sup>	±10% max. @1A
Protection	Short circuit Battery over/under temperature Charger over temperature Charge timer

Environmental	
Cooling	convection cooled
Temperature	Operating: 0°C to 40°C Non-operating -10°C to 70°C
Pressure & Altitude	Operating: 1060hPa to 795hPa -382m to 2000m Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5% to 95% r.H., non-condensing

General	
Indicator	Multi-color LED (green, red, orange)
Battery types	Standard battery RRC1120
Green procurement	RoHS 2011/65/EU WEEE 2012/19/EU Chinese RoHS



LED Indications	
Orange light	The inserted battery is of the correct type and is currently being charged.
Green light	The battery is charged and can be removed for use.
Red blinking	Battery detection phase
Red light	No battery inserted, battery over/under temperature-, charger over temperature-, battery over voltage-, battery charge timer time-out-error or input voltage too low

Charger Mechanical Details	
Housing dimensions (LxWxH)	40.6 x 76 x 12.6mm
Weight	15g (excluding power supply)

#### Notes:

1. Total regulation tolerance includes initial set accuracy, line and load regulation

**Technical Data Sheet****RRC-SCC1120 – Single Cell Charger 1120**

<b>Safety &amp; EMC</b>		
	In combination with specified external AC/DC power supply	
Regulatory approvals	Europe	CE
Electromagnetic Emissions	Europe	EN55011, EN55022, level B
	USA	FCC15 class B
Electromagnetic Immunity	ESD immunity	EN/IEC61000-4-2
	Electromagnetic field immunity	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted Immunity	EN/IEC61000-4-6
	Magnetic Fields	EN/IEC61000-4-8

**Specification external AC/DC power supply**

<b>Input</b>		<b>Output</b>	
Voltage range	100 - 240VAC	Voltage range	5VDC
Current	0.3A max.	Power	5W max.
Stand by power	No load < 0.1W @ 230 VAC	Current range	1A
		Protection	Over voltage, Short circuit

<b>Environmental</b>		<b>General</b>	
Temperature	Operating:	Efficiency	California's Energy Efficiency Level VI
	0°C to 40°C		
	Non-operating	Line regulation	±5%
	-20°C to 60°C	Ripple & Noise	200mV (p-p)

<b>Power Supply Mechanical Details</b>	
Standard output connector	Micro USB
Housing dimensions (LxWxH)	71 x 60 x 26.5mm for UK
	60 x 26 x 40mm for EU
	60 x 26 x 40mm for KR
	60.3 x 41.5 x 66.3mm for AUS
	60 x 25.2 x 40mm for USA/CAN/JP
	68 x 30 x 35mm for CN
Weight	70g max.

<b>Safety &amp; EMC &amp; Approvals</b>		
Approvals	Europe	CE
	International	CB
	USA/Canada	cULus
	Australia	RCM
	Russia (Customs Union)	EAC
	Korea	KC
	China	CCC
	Japan	PSE
	India	BIS

<b>Germany/Headquarters</b>	<b>USA</b>	<b>Hong Kong</b>	<b>China</b>
RRC power solutions GmbH Technologiepark 1 D-66424 Homburg / Saar	RRC power solutions Inc. 18340 Yorba Linda Blvd., Suite 107-437 Yorba Linda, CA 92886-4104	RRC power solutions Ltd. S-V,6/F, Valiant Industrial Centre 2-12 Au Pui Wan Street Fo Tan, N.T., Hong Kong	RRC power solutions Ltd. Room 520, Yuanlin Building, Aiguo Road No. 3066, Luohu District, Shenzhen 518021
Tel.: +49 6841 98090 Fax: +49 6841 9809280 Email: sales@rrc-ps.de Web: www.rrc-ps.de	Tel.: +1 714 777 3604 Fax: +1 714 777 3658 Email: usa@rrc-ps.com Web: www.rrc-ps.com	Tel.: +852 2376 0106 Fax: +852 2375 0107 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com	Tel.: +86 755 8374 1908 Fax: +86 755 8374 1861 Email: hkrrc@rrc-ps.cn Web: www.rrc-ps.com

## The Netherlands



Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
F: +31 (0)53 573 33 30  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)

## Belgium



Zuiderlaan 14 bus 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
F: +32 (0)2 462 01 25  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)

## UK & Ireland



St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
F: +44 (0)845 299 22 26  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)

## Germany North



Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
F: +49 (0)4106 627 07-20  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Germany South



Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
F: +49 (0)89 436 086-19  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Austria



Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
F: +43 (0)662 216 026-66  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)

## Nordic region



Sdr. Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
F: +45 88 20 26 39  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)

## General information



[info@texim-europe.com](mailto:info@texim-europe.com)  
[www.texim-europe.com](http://www.texim-europe.com)