


EPIC Board with 6th Generation Intel® Core™ i-S series Processor (Socket Type)

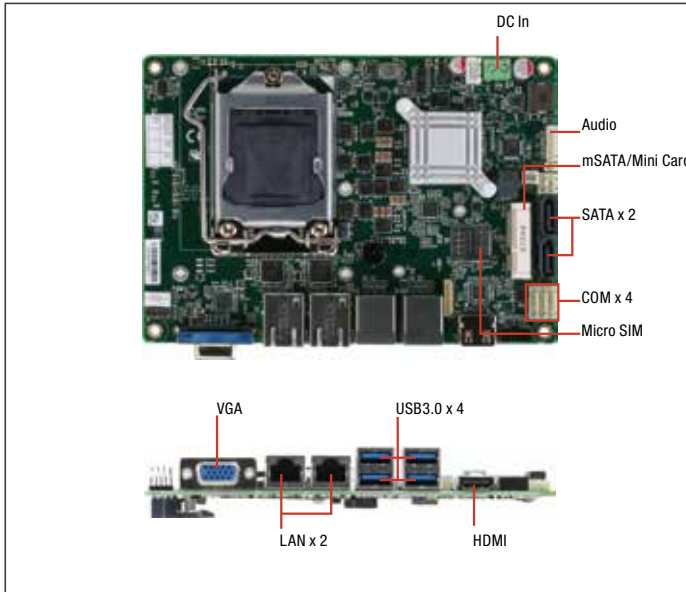


Features

- 6th Generation Intel® Core™ i-S series Processor (Socket Type)
- 12V, 9-24V Wide Voltage, Non-ECC DDR4 SODIMM x 1
- Basic VGA/HDMI/LVDS Display For Mini-server
- USB 3.0 x 4, USB 2.0 x 2 with High Performance CPU, Easy for Machine Vision
- Mini-card/mSATA Selection
- HDA, SATA x 2, GPIO x 8, COM x 4

Specifications

System	
Form Factor	EPIC
CPU	i3-6100TE (2C) 2.7 GHz (TDP: 35W) i5-6500TE (4C) 2.3 GHz, up to 3.3 GHz (TDP: 35W) i7-6700TE (4C) 2.4 GHz, up to 3.4 GHz (TDP: 35W)
CPU Frequency	Intel® 6th Generation Core™ i3/i5/i7/Celeron®
Chipset	H110 (6W)
Memory Type	DDR4 (Non-ECC), 2133MHz
Max. Memory Capacity	Up to 16G
BIOS	AMI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Power Requirement	12V or 9-24V
Power Supply Type	AT/ ATX
Power Consumption (Typical)	—
Dimension (L x W)	4.53" x 6.50" (115mm x 165mm)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	—
Certification	CE/FCC
Display	
VGA/LCD Controller	Intel® 6th Generation Intel® Core™ i3/i5/i7/Celeron®
Video Output	CRT/LVDS/HDMI
Backlight Inverter Supply	Max. 12V
I/O	
Ethernet	LAN x 2 (Real IO) (i211 x 2)
Audio	ALC892, no Amp
USB Port	USB3.0 x 4 (Real IO) USB2.0 x 2 (Internal)
Serial Port	COM x 4 (COM2: RS-232/422/485)
Parallel Port	—
HDD Interface	SATA Gen3 x 2, SATA Power (5V)
FDD Interface	—
SSD	mSATA x 1 (optional for mini-Card)
Expansion Slot	Mini-card x 1, Micro SIM x 1
PWM LCD Support	—
DIO	8 bit
TPM	—
Touch	—



Packing List

- SATA Cable, Length 50cm (1709070500)
- SATA Power Cable, Length 15cm (1702150155)
- Jumper Cap (9657666600)
- Product DVD
- EPIC-SKS7

Optional Accessories


Part Number	Description	QTY
1702002010	Power Cable (2pin), Length 10cm	1
1709100254	Audio Cable (3pin), Length 25cm	1
1700050207	USB Cable (5pin), Length 20cm	4
1701090150	COM Cable (9pin), Length 15cm	4
EPIC-FAN01	CPU Cooler	1

Distributed by:




www.texim-europe.com

Block Diagram

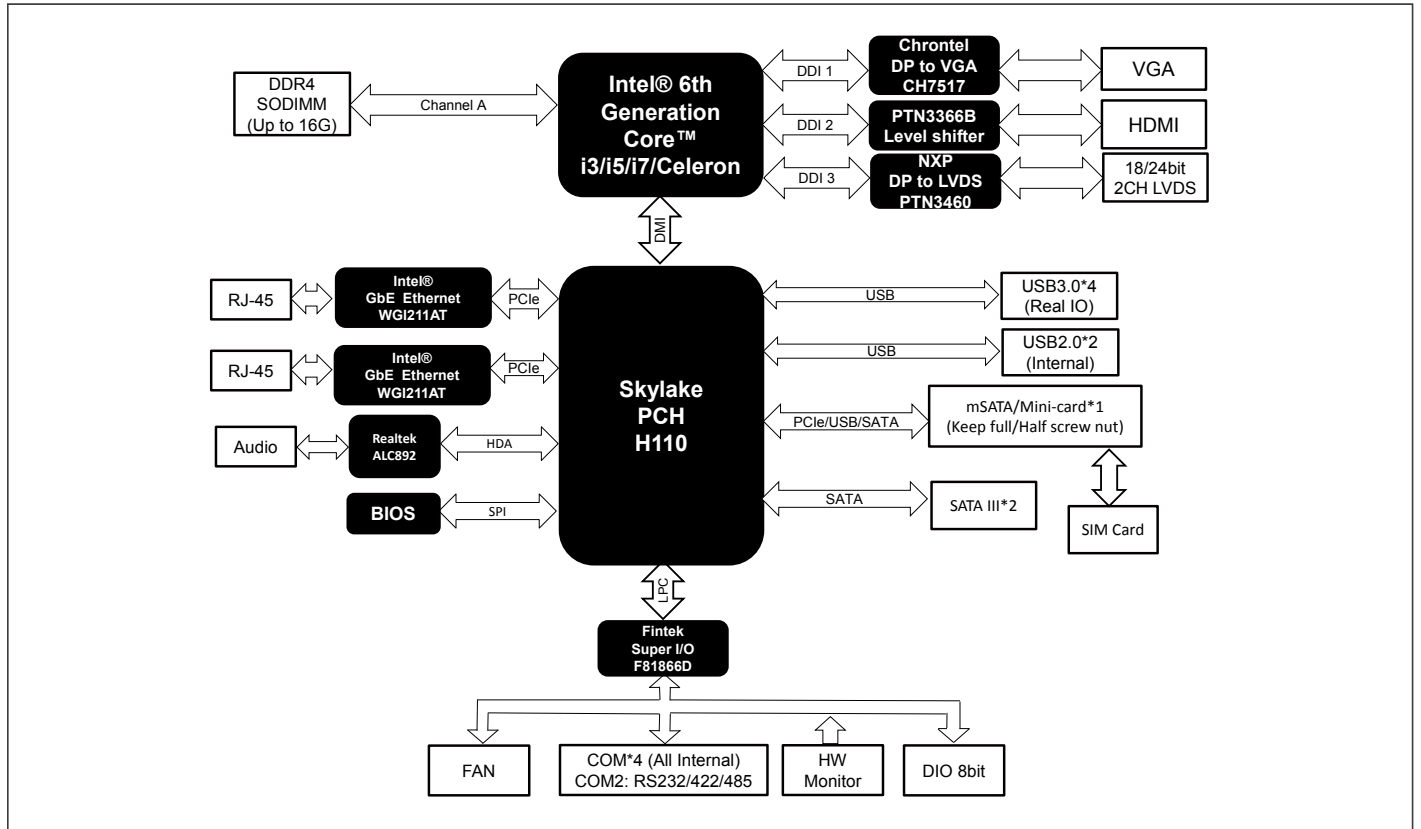

Dimension

Unit: mm

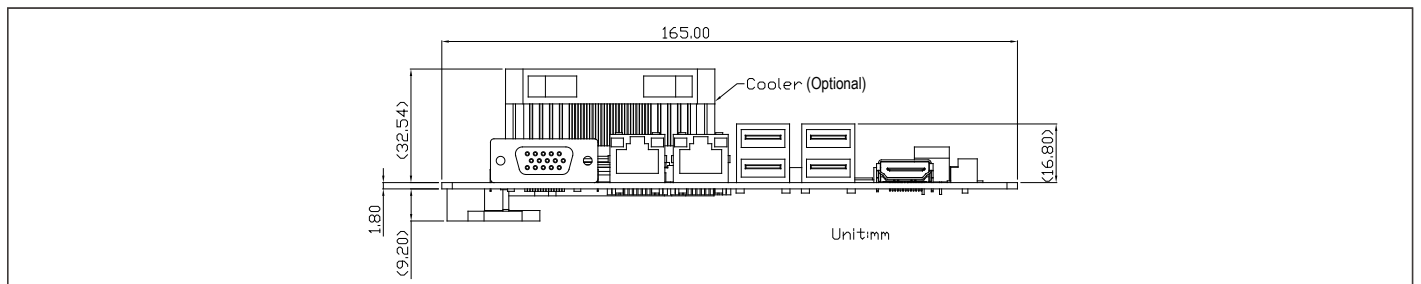

Ordering Information

Part Number	CPU	Memory	Thermal	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Power Temp	Others
EPIC-SKS7-A10-0001 (Standard)	LGA1151 (Socket Type)	DDR4 (Max 16G)	FAN	VGA + HDMI	—	SATA x 2	GbE x 2	USB3.0 x 4 USB2.0 x 2	3	1	mSATA/miniCard x 1	12V	0°C ~ 60°C	DIO x 8
EPIC-SKS7-A10-0002 (Advanced)	LGA1151 (Socket Type)	DDR4 (Max 16G)	FAN	VGA + LVDS + HDMI	24bit, 2CH	SATA x 2	GbE x 2	USB3.0 x 4 USB2.0 x 2	3	1	mSATA/miniCard x 1	9~24V	0°C ~ 60°C	Micro-SIM, DIO x 8

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com