

2J425

Specification:

Frequency	GSM (900 MHz)/GPS (1575.42 MHz)/DCS (1800 MHz) PCS (1900 MHz)/3G (UMTS 2.1 GHz)
Impedance	50 Ohms
Polarization	GSM: Horizontal / GPS: RHCP
LNA Gain	27dBi
VSWR	<2:1
Voltage supply	2.8V - 5.5 V
Current	15mA - 25mA
Power (max.)	138mW
Operating temperature	-40°C to +85°C
Certificate	IP67

Connection:

Navigation:	
Connector type	upon request
Cable length	upon request
Cable type	RG174U
Mobile:	
Connector type	upon request
Cable length	upon request
Cable type	RG174U

Dimensions:




Max height	13.5mm
Max length	77mm
Max width	34mm

Housing:


Color	Black
Material	ABS



GSM VSWR

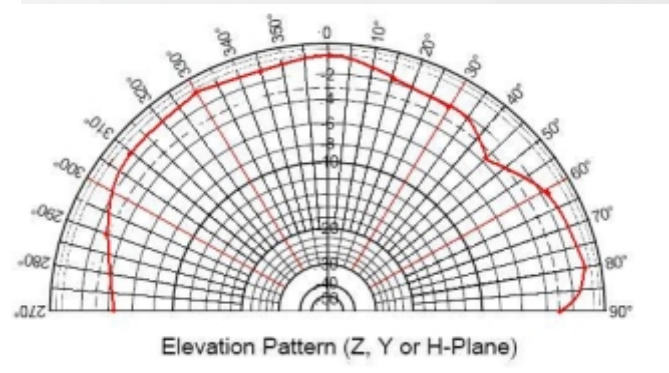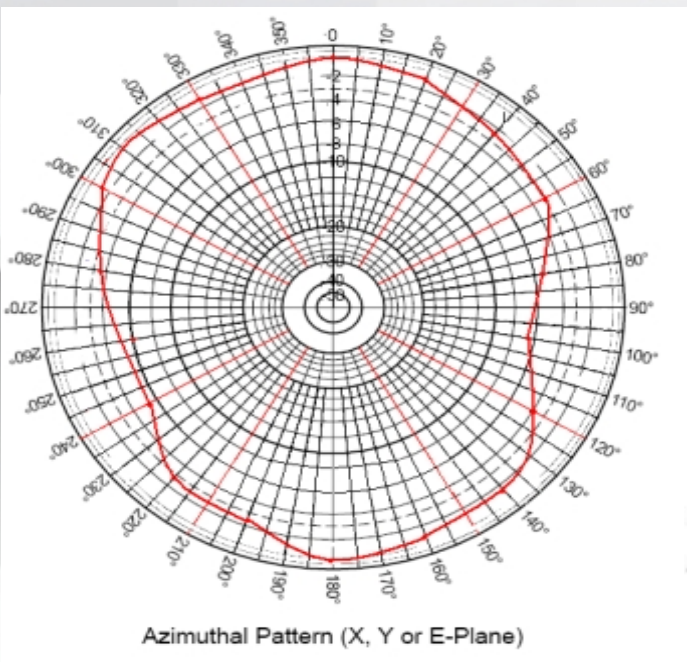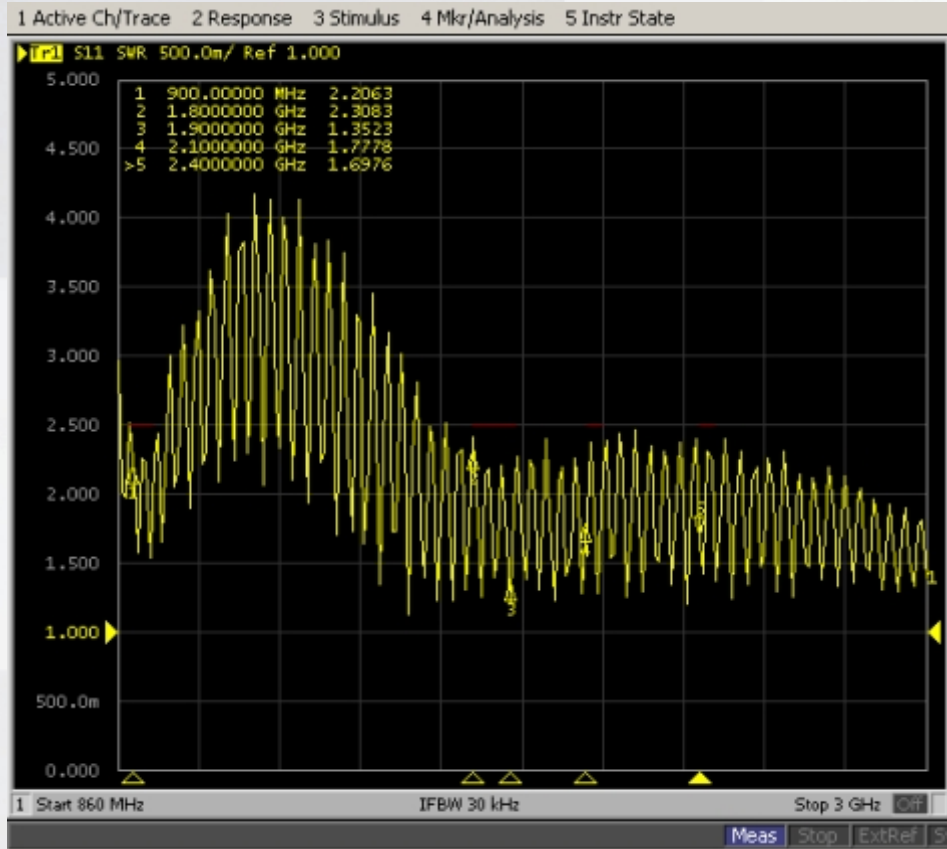

GPS 3V

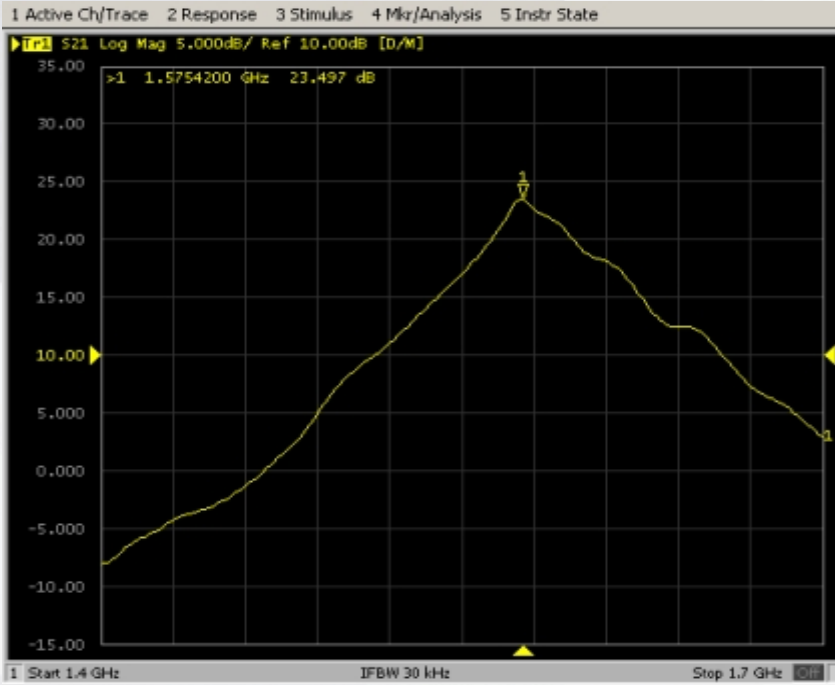

GPS 5V

