

7" Rugged Tablet X86-based Windows® 10 up to 1.92 GHz Quad Core Processor



Specifications

System Architecture	
Processor	Intel® Atom™ X5-Z8350 CHT-T3 Quad Core 1.92 GHz Processor
Operating System	Windows® 10, Android™ 5.0
Memory	Onboard 2GB DDR3L
Storage	Onboard 64GB eMMC
Display	7" TFT-LCD / 16:10, with Projected Capacitive Multi-Touch screen
I/O Ports	DC-in jack x 1, MicroSD Card x 1, SIM card slot x 1, USB 2.0 x 2(A Type x 1, Mini USB x 1), USB 3.0 x 1 (Type C), Built-in Speaker & Microphone x 1, 3.5mm stereo headphone jack x 1, 1D/2D Barcode scanner x 1 (Optional), Magnetic Stripe Reader x 1 (Optional), COM port x 1+Ethernet x 1 (Optional)
Communication	Bluetooth v4.0, Wi-Fi (802.11 b/g/n), NFC / RFID (13.56MHz), 3G (Optional)

Features

- 7" WXGA (1280 x 720) TFT LCD Display, 400 nits, Sunlight Readable (Optional)
- Intel® Atom™ x5-Z8350 CHT-T3 Quad Core 1.92 GHz Processor
- DDR3L-RS 1600 2 GB
- Projected Capacitive Multi-Touch Panel, Gorilla Glass
- Extended Battery Swappable, MIL-STD 810G, IP65 Compliant
- GPS/GLONASS Simultaneously
- WiFi a/b/g/n, BT4.0
- Support NFC/RFID, Ethernet + COM Port (Optional)
- 1D/2D Barcode Scanner with Trigger Button
- MSR (Optional)/SCR (Optional)
- G-Sensor, Light Sensor, E-Compass
- Windows® 10, Android™ 5.0




Navigation	GPS, Glonass
WWAN(optional)	3G: WCDMA
Camera	2 MP front camera, 8 MP auto-focus rear camera with flash
Sensors	G-sensor, E-Compass, Gyroscope, Light-sensor
Expansion Slot	Docking
Barcode Code Scanner (optional)	1D Scanner support CMOS engine (optional), 2D Scanner support LED engine
RFID (optional)	HF RFID based on 13.56MHz compatible with NFC
Mechanical	
Color	Black
Dimension (W x H x D)	5.38" x 8.58" x 0.83" (136.6mm x 219mm x 21mm)
Gross Weight	1.254 lb (0.57 kg)
Environmental	
Operating Temperature	-20 °C ~ 50 °C (-4 °F ~ 122 °F)
Storage Temperature	-55 °C ~ 70 °C (-67 °F ~ 158 °F)
Humidity	50°C; 5% ~ 90%RH; 120 hours, non-condensing
Environmental Sealing	IP65
Vibration	MIL-STD-810G Method 514.6 Procedure I, Cat. 24, Fig. 514.6E-1 & E-2
Drop	MIL-STD-810G Method 516.6 Procedure IV - Height of Drop: 122cm (48 inch; 4ft), - Number of Drop: 26 times, - Floor: Twoinch plywood backed by concrete, - For all surfaces, edges and corners
ESD	Air charge: +/- 8KV, Contact charge: +/- 4KV
Certifications and Standards	UL: UL60950-1, CE/LVD: EN60950-1, FCC, CE
Power Supply	
AC / DC Adapter	AC 100~240V, 50~60Hz ; DC 12V/3A (36W)
Battery Life	Li-polymer High Capacity Battery, up to 8 Hours Battery Life, Li-polymer High Capacity Battery, up to 6 Hours Battery Life, one hard pack removable
Master Battery	External Battery: 7.4V 1530mAh
Slave Battery	Removable Battery: 7.4V 1530mAh
Display	
LCD	7" TFT-LCD / 16:10, with LED backlight
Resolution	1280 x 800 pixel
Maximum Color	16.7M
Dot Size	0.117 x 0.117(H)
Brightness	400 nits; Sunlight Readable (Optional)*
Viewing Angle	Horizontal: 178° (Typ.), Vertical: 178° (Typ.)
Touch Screen	
Touch Type	Projected capacitive multi-touch screen (PCT)
Light Transmission	Min 87% (ASTM D1003; Wavelength = 550nm)

* Sunlight readable by optional Anti-Reflective bonding and optional Anti-Glare film.

Dimension

Unit: mm

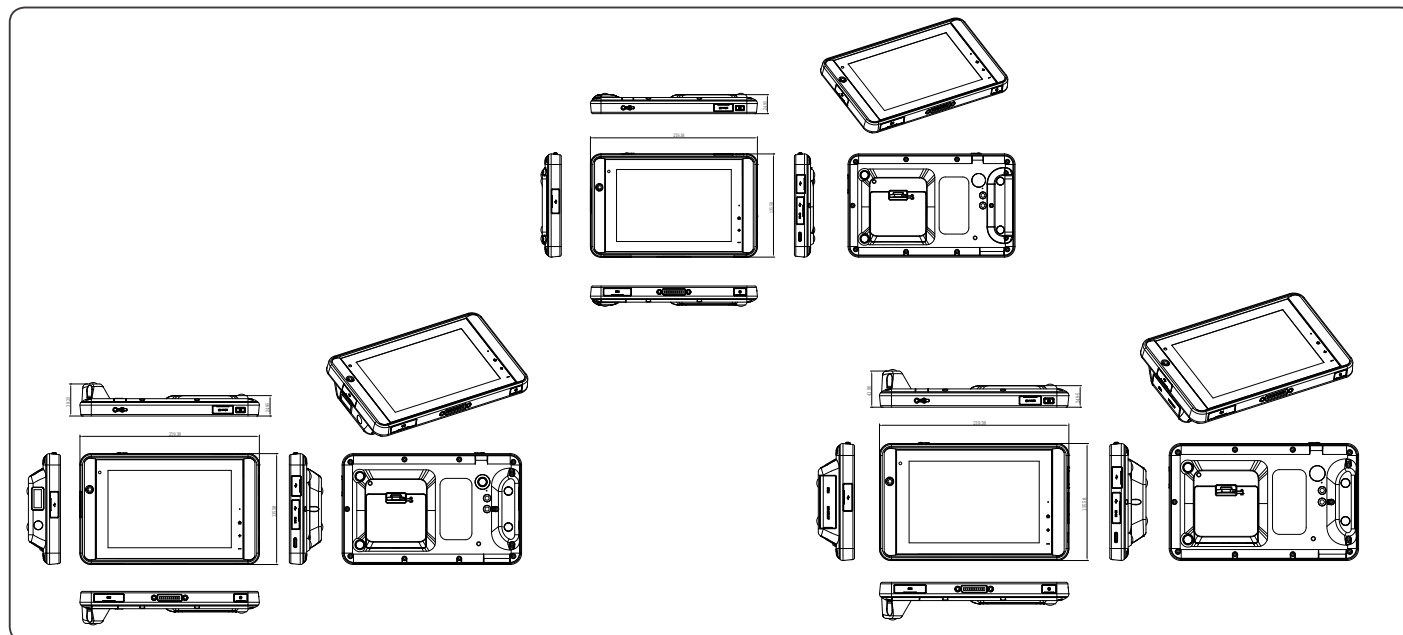

Packing List

- **1255300360**
AC Power Adapter
- **9789600A00**
Battery
- **Product CD**
- **RTC-700B**

Optional Accessories

- **AP-0T9789666663**
Vehicle Docking (Non-chargeable)
- **1700050156**
USB OTG Cable (Host to Device)
- **AP-PS1757402101**
Vehicle DC/DC Adapter
- **219700C001**
Carry Bag w/ Shoulder Belt
- **1700051000**
USB Cable (Client to PC)
- **9789700A02**
Desktop Stand
- **1702031831**
Power Cable for Europe
- **PER-A139**
MSR Module
- **1702031830**
Power Cord Cable for USA
- **PER-A140**
MSR and SCR Module
- **PER-A151**
USB, COM and RJ-45 Module
- **PER-A152**
COM and Ethernet Module
- **PER-A153**
Barcode Module
- **TF-RDS-0310-0000**
Docking Station (with Stand)
- **TF-RDS-0310-0002**
Docking Station (without Stand)
- **9789700A01**
Portable Stand
- **9789700A03**
Portable Stand with Ring Hand Strap
- **RDS-0040-0000**
4-Bay Battery Charger

* Small quantity MOQ may apply for optional/customized services.

Ordering Information

Part Number	CPU	LCD Display	Touch Screen	System Memory	Storage	OS	WiFi/Bluetooth	3G Bands (MHz)	Navigation	Sensor	Camera	Battery	Expansion I/O	Size & Weight	Operation Temp	Durable	NFC (HF RFID)	2D Barcode Scanner	Com + Ethernet	Docking
RTC-700B-TAD-WBGHR-1101	Intel® Atom™ x5-Z8350 CHT-T3 Quad Core 1.92 GHz Processor	7" TFT LCD	Pcap 10-point	DDR3L-RS 1600 2GB	64GB Flash eMMC	Windows® 10	802.11 a/b/g/n + BT4.0+ EDR	850/1900/2100	GPS/ Glonass/ AGPS*	Light Sensor x 1, G Sensor x 1, 3-axis digital gescopex 1, Vibratorx 1	Front: 2MP, Back: 8MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	USB A x 1, MiniUSB x 1, USB C x 1, micro SD x 1, SIM Card x 1	L219.4 x W135.58 x H 21.2 mm, 640g	-20°C ~ 50°C	Meet IEC 60529 IP-65 standard, Mil Std 810G-516.6, Procedure IV, 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off, 2 units to pass	Yes	Yes	—	Yes
RTC-700B-TAD-WBGHR-1102	Intel® Atom™ x5-Z8350 CHT-T3 Quad Core 1.92 GHz Processor	7" TFT LCD	Pcap 10-point	DDR3L-RS 1600 2GB	64GB Flash eMMC	Windows® 10	802.11 a/b/g/n + BT4.0+ EDR	850/1900/2100	GPS/ Glonass/ AGPS*	Light Sensor x 1, G Sensor x 1, 3-axis digital gescopex 1, Vibratorx 1	Front: 2MP, Back: 8MP	Dual-Battery, Internal: 7.4V, 1530mAh, External: 7.4V, 1530mAh	USB A x 1, MiniUSB x 1, USB C x 1, micro SD x 1, SIM Card x 1	L219.4 x W135.58 x H 21.2 mm, 655g	-20°C ~ 50°C	Meet IEC 60529 IP-65 standard, Mil Std 810G-516.6, Procedure IV, 26 drops of 48" height to 2" plywood over concrete with bumpers & uNits off, 2 units to pass	Yes	—	Yes	Yes

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com