



NOTES:
1. ALL MATERIALS AND COMPONENTS MUST BE RoHS COMPLIANT.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVAL
1				


PN	FUNCTION	PN	FUNCTION
1	GND	2	RK1
2	TX1	3	RK2
3	TX2	4	RK3
4	TX3	5	RK4
5	TX4	6	RK5
6	TX5	7	RK6
7	TX6	8	RK7
8	TX7	9	RK8
9	TX8	10	RK9
10	TX9	11	RK10
11	TX10	12	RK11
12	TX11	13	RK12
13	TX12	14	RK13
14	TX13	15	RK14
15	TX14	16	RK15
16	TX15	17	RK16
17	TX16	18	RK17
18	TX17	19	RK18
19	TX18	20	RK19
20	TX19	21	RK20
21	TX20	22	RK21
22	TX21	23	RK22
23	TX22	24	RK23
24	GND	25	RK24
25-40	NC	26	RK25
		27	RK26
		28	RK27
		29	RK28
		30	RK29
		31	RK30
		32	RK31
		33	RK32
		34	RK33
		35	RK34
		36	RK35
		37	GND
		38-54	NC

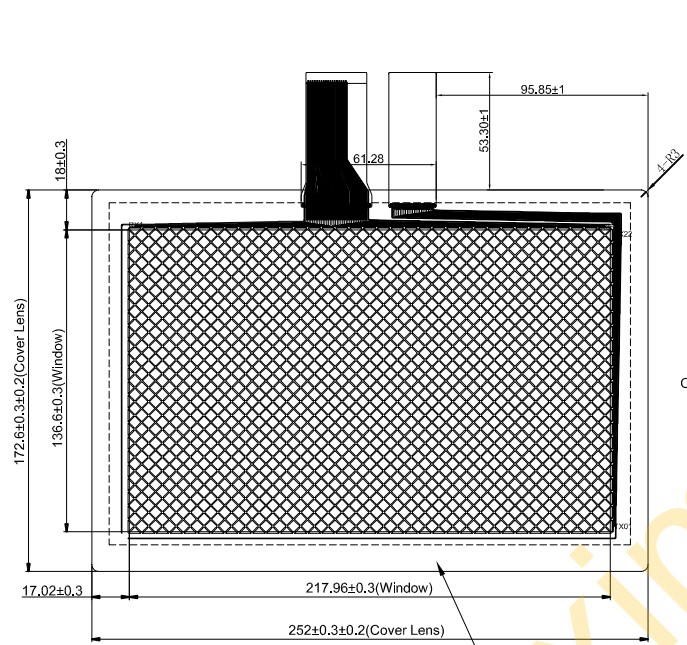

正視圖

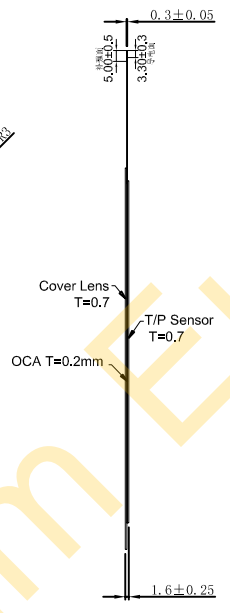

側視圖

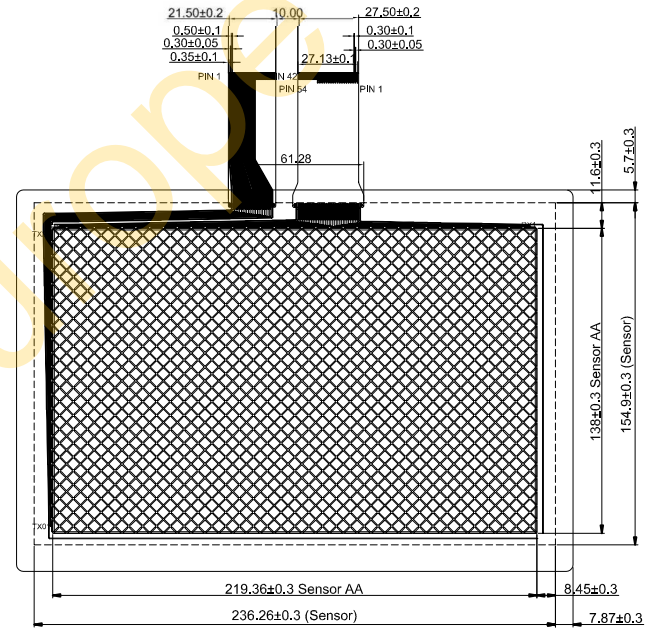

背視圖

技術要求

1. 結構類型: Glass+Glass
2. 工作電壓: 2.8-3.3V
3. 工作環境: -20° C~+70° C
4. 儲存環境: -30° C~+80° C
5. 透光率: ≥85%
6. 表面硬度: ≥6H
7. 未標公差按: ±0.3mm。

Distributed by:



MATERIAL:	CONTRACT NO.		
	APPROVAL	DATE	
	DRAWN	2016.08.30	
	CHECKED		
FINISH:	APPROVED	CH-101CS-6562	
	PRODUCTION		
	SIZE	CUST. NO.	DWG NO.
	A4		
	SCALE	FILE NO.	SHEET
	N/A		1 OF 1

