


# 05 PICO-APL1

Pico-ITX Boards

Pico-ITX Board with Intel® Atom™ E3900 SoC Processor, Intel® N4200, N3350

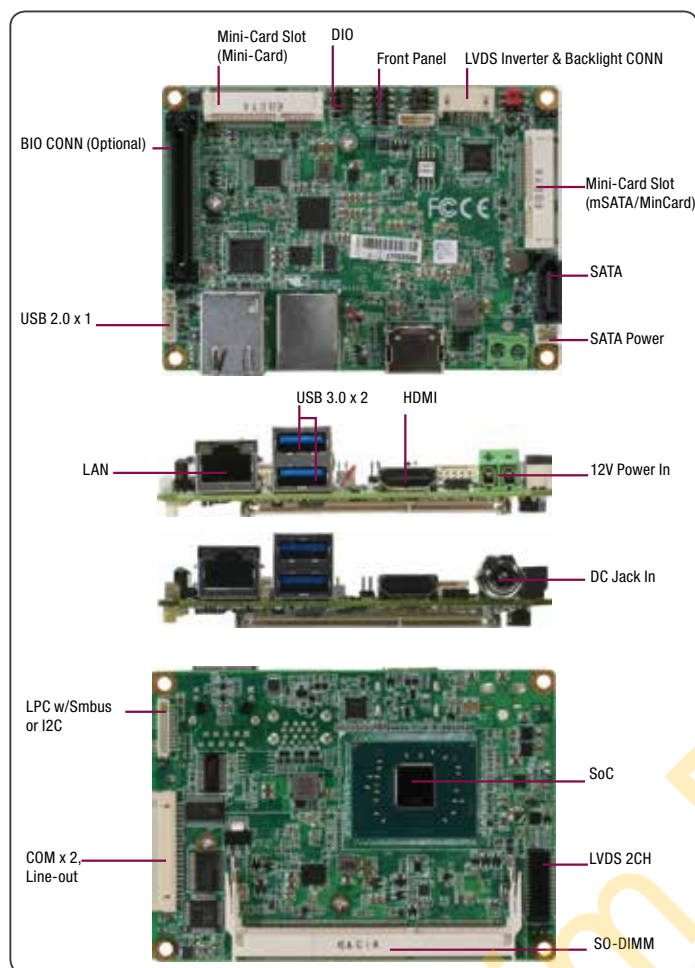

## Features

- Intel® Atom™ E3900 SoC Processor, Intel® N4200, N3350
- DDR3L 1866 MHz SODIMM x 1, Up to 8 GB
- 18/24-bit Dual Channel LVDS LCD (Optional)
- Support Triple Display (Optional)
- HDMI Support 3840 x 2160 (4K x 2K)
- SATA 3.0 x 1, mSATA (Full Size) x 1
- Intel® Gigabit Ethernet x 1, RJ-45 x1
- USB3.0 x 2, USB2.0 x 1
- RS-232 x 1, RS-232/422/485 x 1 (Optional by Cable)
- Mini-Card x 1 (Half-Size)
- Digital I/O 4-bit
- BIO Connector for Daughter Board (Optional)



Display	
Chipset	Intel® Atom™ E3900 SoC Processor, Intel® N4200, N3350
Resolution	1. LVDS (18/24bit 2CH) 1920 x 1200 (optional) 2. HDMI up to 3840 x 2160 3. DDI (BIO)
LCD Interface	18/24bit 2CH LVDS
I/O	
Storage/SSD	SATA 6.0Gb/s x 1, mSATA/MiniCard (Full size) x 1
Ethernet	Intel® Gigabit Ethernet i210AT, 10/100/1000Base-TX, RJ-45 x 1
USB Port	USB 3.0 x 2, Rear IO, USB 2.0 x 1
Serial Port	COM1: RS-232 x 1, COM2: RS-232/422/485 x 1 (Ring/ +5V/ +12V)
Audio	Line-out x1
DIO	4-bit (2-in, 2-out)
Expansion Slot	Mini Card (Half-size) x 1, BIO (optional) x 1, I2C or SMBus x 1
SIM	—
TPM	—
Touch	—

## Specifications

System	
Form Factor	PICO-ITX
CPU	Intel® Atom™ E3900 SoC Processor, Intel® N4200, N3350
CPU Frequency	up to 2.0GHz
Chipset	Intel® Atom™ E3900 SoC Processor, Intel® N4200, N3350
Memory Type	204-pin DDR3L SODIMM x 1, DDR3L 1867MHz, Max 8GB
Max. Memory Capacity	Up to 8GB
BIOS	AMI/SPI
Wake On LAN	Yes
Watchdog Timer	255 Level
Power Requirement	+12V AT/ATX (default)
Power Supply Type	AT/ATX (default)
Power Consumption (Typical)	Intel® N3350 Processor, DDR3L 8GB 0.91A@+12V
System Cooling	Heat-spreader/ heatsink optional
Dimension	3.94" x 2.84" (100mm x 72mm)
Gross Weight	0.25 kg
Operating Temperature	32 °F~ 140 °F (0°C ~ 60°C),
Storage Temperature	-40 °F ~ 176 °F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	170,000
Certification	CE,FCC

## Packing List


- 1703200153 (Optional by model)  
COM x 2, Line-out Cable
- Product DVD
- PICO-APL1

## Optional Accessories

Part Number	Description	Qty.
1709070500	SATA CABLE.7P Pitch 1.27mm.50cm	1
1702150155	SATA Power Cable	1
1700050207	USB cable 20cm	1
1703200153	COM x 2, line-out cable	1
PICO-APL1-HSP01	Heat-spreader	1
PICO-APL1-HSK01	Heat-sink, to be used with Heat-spreader	1
*BIO-ST05-C14D32	BIO Board w/LAN, 14COM, 32 DIO, USB3.0, 2 USB2.0 or 5 USB2.0 (by Model)	1


\* Customized BIOS is required

## Block Diagram

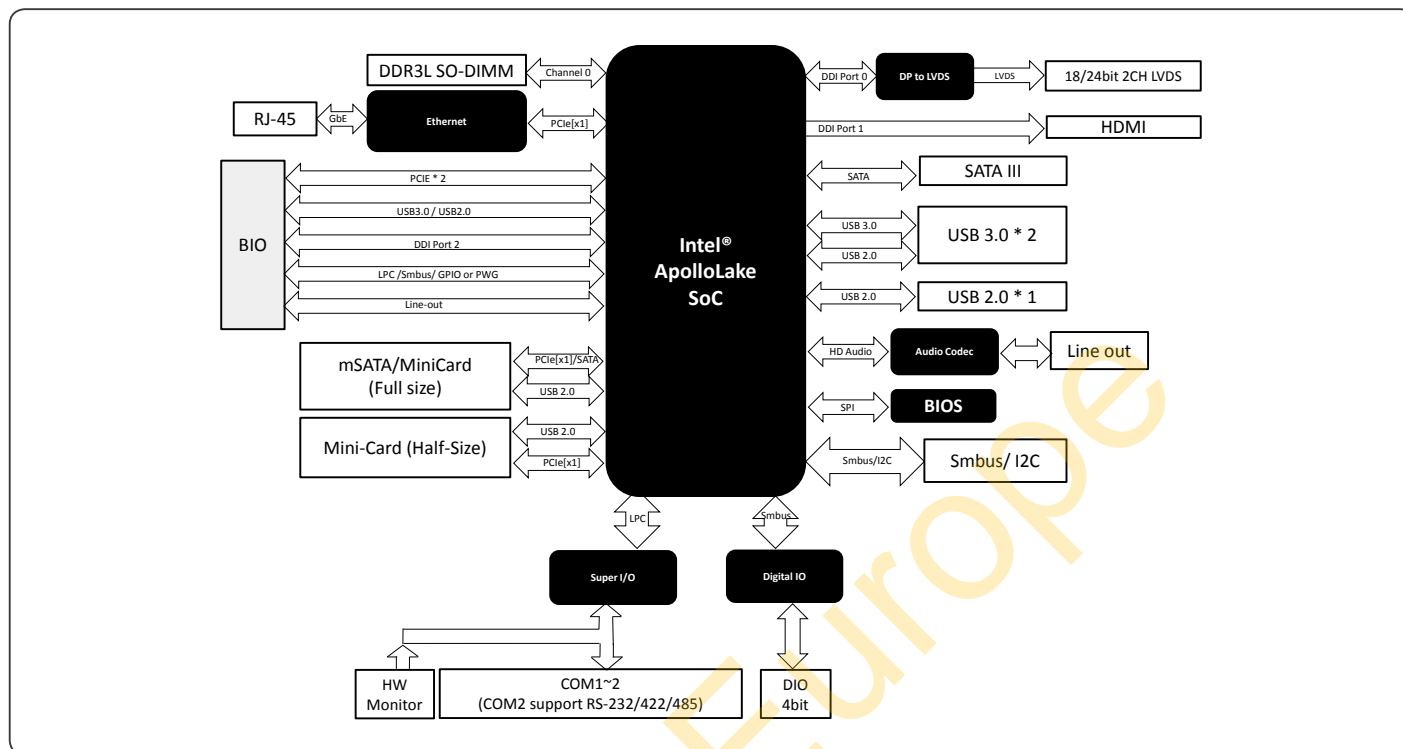

## Dimension

Unit: mm

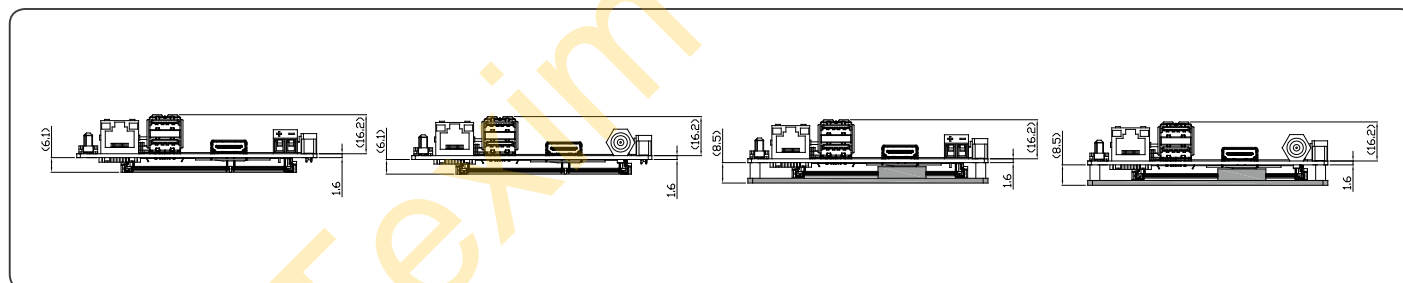

## Ordering Information

Part Number	CPU	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Power Temp	Others
PICO-APL1-A10-0002	N3350	w/o Heat-spreader	HDMI	—	SATA x 1, mSATA x 1 (Full-size)	GbE x 1	USB3.0 x 2 USB2.0 x 1	(Optional the COM cable)	(Optional the COM cable)	miniCard x 1 (Half-size)	12V DC-Jack	0°C ~ 60°C	DIO x 4
PICO-APL1-A10-0003	N3350	w/o Heat-spreader	LVDS/ HDMI	24bit,2CH	SATA x 1, mSATA x 1 (Full-size)	GbE x 1	USB3.0 x 2 USB2.0 x 1	1	1	miniCard x 1 (Half-size)	12V Phoenix Terminal	0°C ~ 60°C	DIO x 4, Line-out, BIO

## Distributed by:

