




In-Vehicle Cellular Gateway

Feature Sets:

- **In-Vehicle Applications:** LTE connection, GNSS fleet tracking, and Wi-Fi Internet access for passengers.
- **Dual SIM:** location free reliable connectivity with multi-ISP fail-over.
- **Versatile Cellular:** Uplink settings by service provider; data usage control.
- **Complete Network:** Built-in NAT/Port Forward/Routing/IPv6 are compatible with existing IP networks.
- **Wi-Fi Hotspot:** IEEE 802.11 b/g/n compliant; multiple SSIDs; captive portal.
- **High Security:** Various VPN protocols & scenario; built-in Firewall & IPS; ACL & Authentication by MAC/User to enhance access security.
- **Flexible Administration:** Web UI for basic settings; programmable CLI and Command Script for advanced configuration; NMS based on SNMP or TR-069; configurable SMS administration.
- **Smart Event Handling:** Mechanism to manage pre-defined events by administrator. Events triggered by System/Interface status change, and notification sent by SMS, SNMP trap, or e-mail.
- **Ruggedized Design:** Vibration and shock proof, extended operational temperature range, variable power input installation.

Connection Diagram:

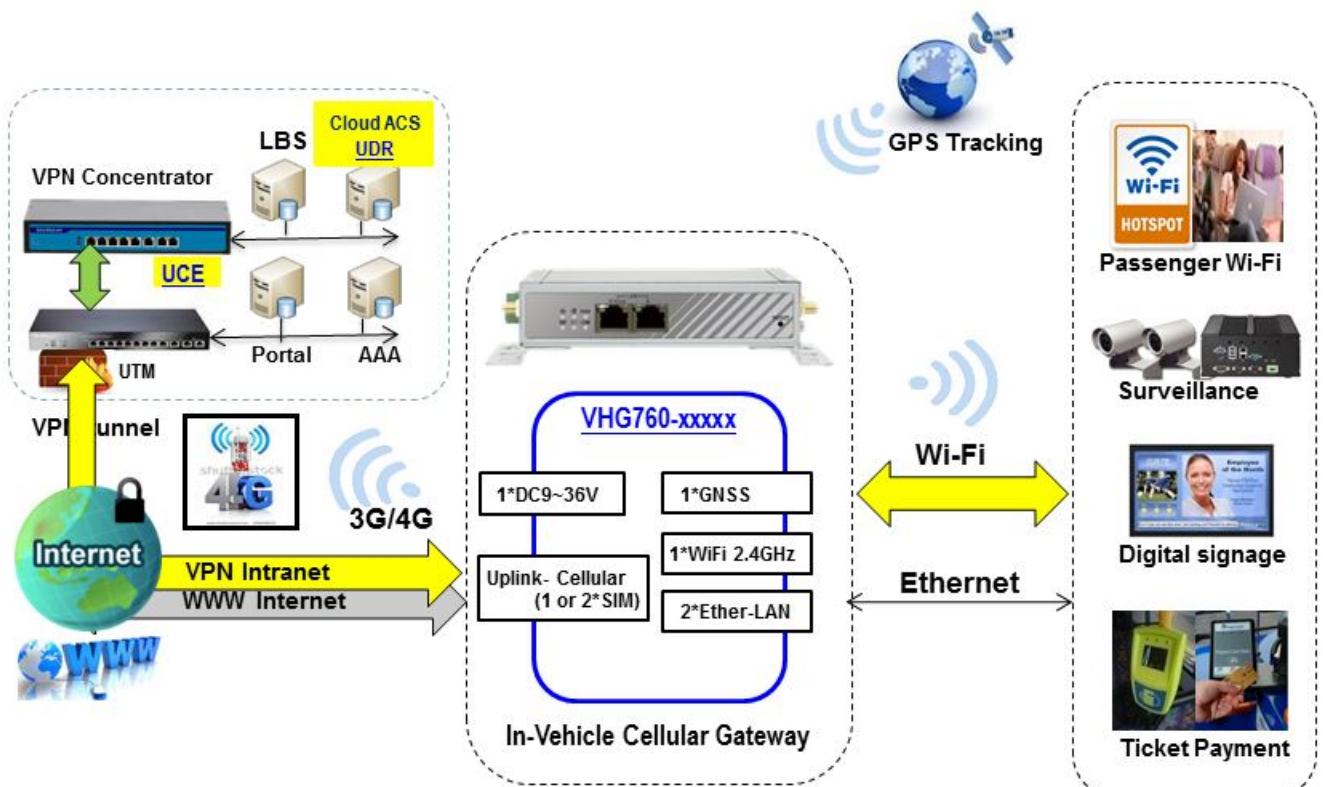


Product Specification¹:

VHG760	-0T001	-0T021
Uplink – Cellular	1* LTE cat.4 (single SIM) (LTE: 800/900/1800/2100/2300/2600MHz; UMTS: 850/900/1900/2100MHz; GPRS/EDGE: 850/900/1800/1900MHz) ²	1* LTE cat.4 (dual SIM)
LAN - Ethernet	2*RJ45 FE (include 1*LAN/WAN configurable)	
WLAN - WiFi	IEEE 802.11b/g/n (2.4GHz), 2T2R MIMO	
GNSS	GPS Receiver	
Serial Port	-	
Input / Output	-	
Log Storage	-	
Power Source	1* DC 9V ~ 36V (Terminal Block), Power Consumption: max. 9W	


WAN	Multiple WANs, Failover/Load Balance
WiFi LAN	AP Router, WDS, WDS Hybrid Modes
VLAN	Port-based, Tag-based VLAN
Port Forwarding	Virtual Server/ Computer, DMZ Host, PPTP/L2TP/IPSec Pass-through
Routing	Static, Dynamic: RIP1/RIP2, OSPF, BGP
VPN	IPSec, OpenVPN, PPTP, L2TP, GRE
Firewall	SPI Firewall with Stealth Mode, IPS
Access Control	Packet Filter, URL Blocking, MAC Filter, Content Filter, Application Filter
Cellular Toolkit	SMS, Data Usage, SIM PIN, USSD, Network Scan
Event Handling	Managing / Notifying Events; DI, DO, SMS, Modbus, Syslog, SNMP Trap, Email Alert, Reboot
Authentication	External Captive Portal
Configure & Management	Web, Telnet CLI, Command Script, TR-069, SNMPv3 standard & AMIT MIB
System Operation	MMI, System Information, System Time / Log, Backup & Restore, Reboot & Reset
Diagnostic	Packet Analyzer, Diagnostic Tools
Location Track	GNSS, Track Viewer
Dimension (LxWxH)	160x125x47mm (w/o mounting kit) 200x125x 50mm (with mounting kit)
Temperature ³	Operational: -20°C ~ 60°C (-0T1B0 only); -30°C ~ 70°C (others); Storage: -40°C ~ 85°C
Humidity	10% ~ 95% (non-condensing)

Device Interface:

(1) Front View



(2) Left View



(3) Right View



(Note: Interfaces may vary depending on models.)

Accessory List:

(1) Package Content

- 1*Device, 2*Cellular Antenna (3dBi), 2*WiFi Antenna (5dBi),
- 1*Terminal Block (2-pin for DC Power),
- 2*Mounting Brackets, 1*Screw Bag,
- 1*RJ45 Cable, 1*CD (User Manual)

Certification:

(1) Approval / Certificate

CE, E-Mark

(2) Standards & Regulation

EMI: EN 55032: 2015 +AC: 2016 Class B
EN 61000-3-2:2014, 61000-3-3:2013
CISPR 25 Radiated Emission (ECE R10)

EMS: EN 55024:2010+A1:2015
EN 61000-6-2:2005+AC:2005
IEC 61000-4-2(ESD) Level 4
IEC 61000-4-3(RS) Level 4
IEC 61000-4-4(EFT) Level 4
IEC 61000-4-5 (Surge) Level 3
IEC 61000-4-6 (CS) Level 3
IEC 61000-4-8(PFMF) Level 4
ISO 7637-2(2004) (ECE R10)

Radio: EN 301 489-1/-71-17/-24/-52,
EN 300 328 V2.1.1, EN 50385
Safety: EN 60950-1

1. Specifications are subject to change without prior notice.

2. Supported cellular frequency depends on regional hardware version.

3. 3G/4G and WiFi performance will be degraded if device's ambient temperature is above 60°C.

AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068

Web: <http://www.amit.com.tw> Email: sales@amit.com.tw

No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)

VHG760 Datasheet, V1.7c

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com