




Cellular IP Extender

IDG500-0T012

Feature Sets:

- Cellular IP Extender for IP-based business terminal devices like ATM, Printer, IP-CAM.
- Support NAT , Router and Bridge Network Types for various developed requirements.
- Dual SIM design and Network Monitoring function ensure Cellular connectivity alive.
- Cellular / Ethernet / WiFi Uplink Failover function is suitable for different business location.
- Small but complete various Network protocols ,Security and Routing features in one.
- VPN function can make the connectivity in closed-Network between Center and Remote for security issue.
- SMS / SNMP / E-mail manage & notify event types can meet different application needs.

Connection Diagram:

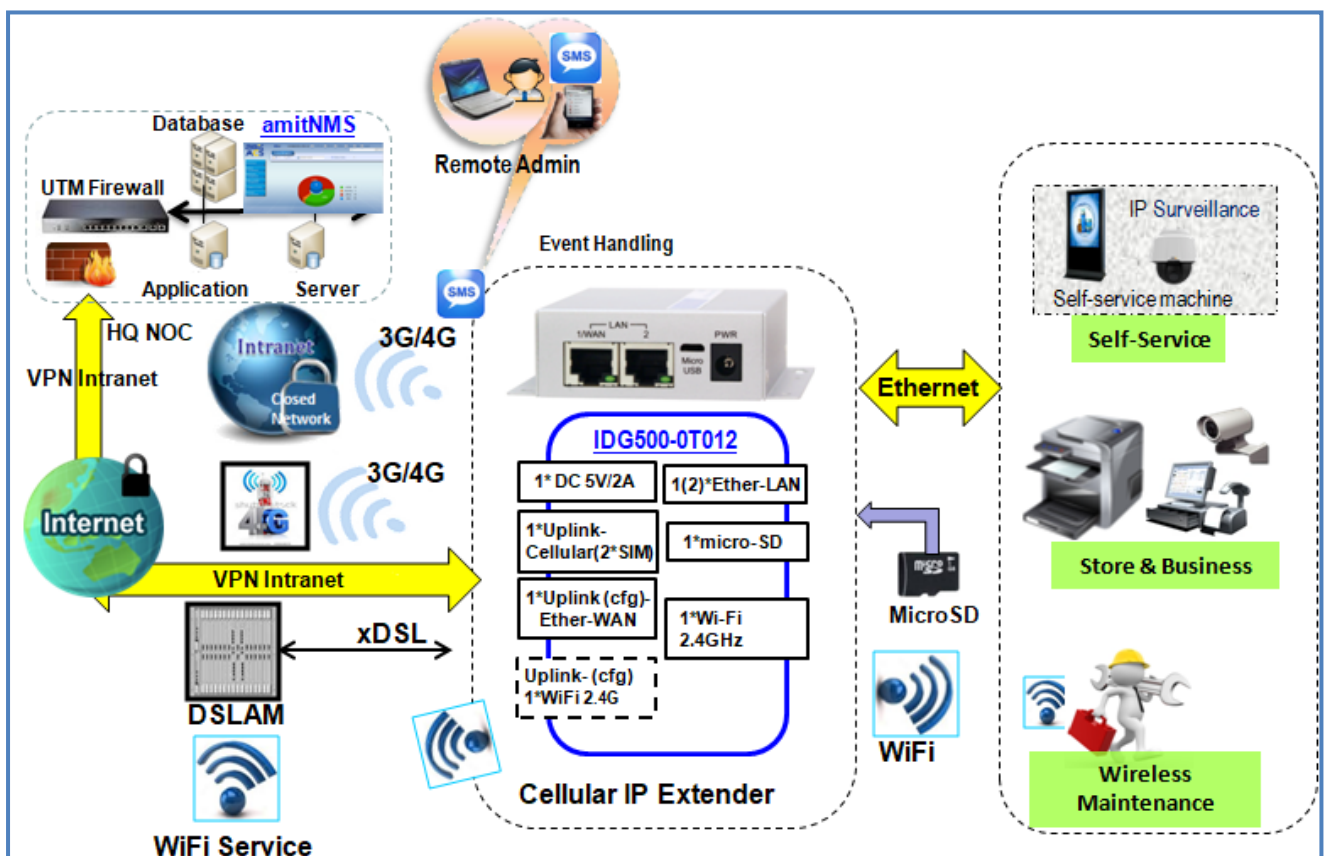

Specifications¹:

Device Interfaces

Uplink: 1*LTE module (dual SIM); 1*11N (2.4GHz)
WiFi Uplink
LAN-RJ45: 2*RJ45 FE
Log Storage: 1*MicroSD
Cellular Band³: LTE: 800/900/1800/2100/2300/2600 MHz,
UMTS: 850/900/1900/2100 MHz,
GPRS/EDGE: 850/900/1800/1900 MHz
Antenna: 2*3dBi detachable ant. (3G/4G)
1*5dBi WiFi DB ant.
Power Source: DC 5V / 2A

WAN Functions

WAN: Cellular WAN, Dual SIM Failover
Cellular: 2G/3G/LTE, IP Pass-through
WiFi: 11N(2.4GHz) WiFi Uplink
IPv6: Dual Stack, 6-in-4, 6-to-4

Basic Functions

Ethernet: LAN IP, Subnet Mask
WiFi Operation: AP Router
WiFi Security: WEP, WPA, WPA2, WPA-PSK, WPA2-PSK, 802.1x
VLAN: Port-based, Tag-based
Port Forwarding: Virtual Server/ Computer, DMZ Host,
VPN Pass-through
Routing: Static, Dynamic: RIP1/RIP2, OSPF,

Object Definition

Scheduling: Time Schedule List
Ext. Server: Email, Syslog, RADIUS,
Certificate: My Certificate, Trusted Certificate,

Security

VPN Tunneling: IPSec, OpenVPN, PPTP, L2TP, GRE;
Tunneling with Full Tunnel, Tunnel Failover
VPN Scenario: IPSec Host / Site, OpenVPN, PPTP, L2TP
Client, DMVPN(GRE over IPSec)
Firewall: SPI Firewall with Stealth Mode, IPS
Access Control: Packet Filter, URL Blocking, MAC Filter

Service

Cellular Toolkit: SMS, Data Usage, SIM PIN, USSD,
Network Scan
Event Handling: Managing / Notifying Events; SMS,
Syslog, SNMP Trap, Email Alert, Reboot

Administration

Config.& Mgmt.: Web, SSH&Telnet CLI, Command Script,
TR-069,
SNMPv3 standard & AMIT MIB
System Op.: System Info., System Time / Log,
Backup & Restore, Reboot & Reset
Web File Mgmt.: Upload , Download
Diagnostic: Diagnostic Tools

Dimension

Device (LxWxH): 93x90x27mm

Environment

Operation Temp.: -30 °C ~ 70 °C
Storage Temp.: -40 °C ~ 85 °C
Humidity: 10% ~ 95% (non-condensing)

Distributed by:



1. Specifications are subject to change without advanced notice.

2. GNSS (GPS) function may be NOT supported for some SKU, it is dependent upon regional hardware version.

3. Supported frequency band is dependent upon regional hardware version.

AMIT Wireless Inc.

TEL: +886 (0)6 505 8026 FAX: +886 (0)6 505 8068

Web: <http://www.amit.com.tw> Email: sales@amit.com.tw

No. 28, Lane 31, Huandong Rd., Sec. 1, Xinshi Dist., Tainan City 74146, Taiwan (R.O.C.)

IDG500-0T001 V1.7b

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com