

Distributed by:



**WINSTAR Display Co.,Ltd.**  
**華凌光電股份有限公司**



# Winstar Display Co., LTD

## 華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

### SPECIFICATION

**CUSTOMER :** \_\_\_\_\_

**MODULE NO.:** **WF50BTIFGDHGX#**

|  |   |
|--|---|
| <p><b>APPROVED BY:</b><br/>( FOR CUSTOMER USE ONLY )</p> | <p><b>PCB VERSION:</b> _____ <b>DATA:</b> _____</p> |
|--|---|

| SALES BY                       | APPROVED BY | CHECKED BY | PREPARED BY |
|--------------------------------|-------------|------------|-------------|
|                                |             |            | 葉虹蘭         |
| <b>ISSUED DATE: 2018/06/12</b> |             |            |             |

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>



**RECORDS OF REVISION**

DOC. FIRST ISSUE

| VERSION | DATE       | REVISED PAGE NO. | SUMMARY             |
|---------|------------|------------------|---------------------|
| 0       | 2017/09/12 |                  | First issue         |
| A       | 2017/11/21 |                  | Modify temperature. |
| B       | 2018/06/12 |                  | Modify CTP IC.      |

Texim Europe

# Contents

- 1.Module Classification Information
- 2.Summary
- 3.General Specification
- 4.Absolute Maximum Ratings
- 5.Electrical Characteristics
- 6.DC Characteristics
- 7.Optical Characteristics
- 8.Interface
- 9.Reliability
- 10.Contour Drawing
- 11.Other

Texim Europe

# 1.Module Classification Information

W F 50 B T I F G D H G X #  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

|   |   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|---|---|------------------------------------|---|---------|---|---|--|------------------------------------|---------------|--------------------------------|---|---------|
| ① | Brand : WINSTAR DISPLAY CORPORATION   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ② | Display Type : F→TFT Type, J→Custom TFT   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ③ | Display Size : 5.0" TFT   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ④ | Model serials no.   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑤ | Backlight Type :  |                                    | F→CCFL, White<br>S→LED, High Light White  |         |   |   | T→LED, White<br>Z→Nichia LED, White  |                                    |               |                                |   |         |
| ⑥ | LCD Polarize Type/<br>Temperature range/ Gray Scale Inversion Direction   |                                    | A→Transmissive, N.T, IPS TFT<br>C→Transmissive, N. T, 6:00 ;<br>F→Transmissive, N.T,12:00 ;<br>I→Transmissive, W. T, 6:00<br>K→Transflective, W.T,12:00<br>L→Transmissive, W.T,12:00<br>N→Transmissive, Super W.T, 6:00 |         |   |   | Q→Transmissive, Super W.T, 12:00<br>R→Transmissive, Super W.T, O-TFT<br>V→Transmissive, Super W.T, VA TFT<br>W→Transmissive, Super W.T, IPS TFT<br>X→Transmissive, W.T, VA TFT<br>Y→Transmissive, W.T, IPS TFT<br>Z→Transmissive, W.T, O-TFT |                                    |               |                                |   |         |
| ⑦ | A : TFT LCD<br>B : TFT+SCREW HOLES+CONTROL BOARD<br>C : TFT+ SCREW HOLES +A/D BOARD<br>D : TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD<br>E : TFT+ SCREW HOLES +POWER BOARD |                                    |   |         |   | F : TFT+CONTROL BOARD<br>G : TFT+ SCREW HOLES<br>H : TFT+D/V BOARD<br>I : TFT+ SCREW HOLES +D/V BOARD<br>J : TFT+POWER BD |  |                                    |               |                                |   |         |
| ⑧ | Resolution:   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | A   | 128160                             | B   | 320234  | C | 320240  | D  | 480234                             | E             | 480272                         | F | 640480  |
|   | G   | 800480                             | H   | 1024600 | I | 320480  | J  | 240320                             | K             | 800600                         | L | 240400  |
|   | M   | 1024768                            | N   | 128128  | P | 1280800   | Q  | 480800                             | R             | 640320                         | S | 480128  |
|   | T   | 800320                             | U   | 8001280 | V | 176220  | W  | 1280398                            | X             | 1024250                        | Y | 1920720 |
|   | Z   | 800200                             | 2   | 1024324 | 3 | 7201280   | 4  | 19201200                           | 5             | 1366768                        | 6 | 1280320 |
| ⑨ | D: Digital L : LVDS M:MIPI  |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑩ | Interface:  |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | N   | Without control board              |   |         | A | 8Bit  |  | B                                  | 16Bit         |                                | H | HDMI    |
|   | I   | I2C Interface                      |   |         | R | RS232   |  | S                                  | SPI Interface |                                | U | USB     |
| ⑪ | TS:   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
|   | N   | Without TS                         |   |         | T | Resistive touch panel   |  |                                    | C             | Capacitive touch panel (G-F-F) |   |         |
|   | G   | Capacitive touch panel (G-G)       |   |         |   |   | C1   | Capacitive touch panel (G-F-F)+OCA |               |                                |   |         |
|   | C2  | Capacitive touch panel (G-F-F)+OCR |   |         |   |   | G1   | Capacitive touch panel (G-G)+OCA   |               |                                |   |         |
|   | G2  | Capacitive touch panel (G-G)+OCR   |   |         |   |   | B  | CTP+GG+USB                         |               |                                |   |         |
| ⑫ | Version: X:Raspberry pi   |                                    |   |         |   |   |  |                                    |               |                                |   |         |
| ⑬ | Special Code  |                                    | #:Fit in with ROHS directive regulations  |         |   |   |  |                                    |               |                                |   |         |

## **2.Summary**

TFT 5.0” is a TN transmissive type color active matrix TFT liquid crystal display that use amorphous silicon TFT as switching devices. This module is a composed of a TFT\_LCD module, It is usually designed for industrial application and this module follows RoHs.

Texim Europe

### 3. General Specifications

| Item                           | Dimension                         | Unit |
|--------------------------------|-----------------------------------|------|
| Size                           | 5.0                               | inch |
| Dot Matrix                     | 800 × 3(RGB) × 480                | dots |
| Module dimension               | 120.7 x 75.8 x 23.2 (Max)         | mm   |
| Active area                    | 108.0 x 64.8                      | mm   |
| Dot pitch                      | 0.045 x 0.135                     | mm   |
| LCD type                       | TFT, Normally White, Transmissive |      |
| View Direction                 | 12 o'clock                        |      |
| Gray Scale Inversion Direction | 6 o'clock                         |      |
| Aspect Ratio                   | 16:9                              |      |
| Backlight Type                 | LED, Normally White               |      |
| Controller IC                  | TFP401                            |      |
| Interface                      | HDMI                              |      |
| With /Without TP               | With CTP                          |      |
| CTP IC                         | FT5426DQ8 Or Equal                |      |
| CTP Interface                  | I2C                               |      |
| CTP FW Version:                | 2                                 |      |
| Surface                        | Glare                             |      |

\*Color tone slight changed by temperature and driving voltage.

## 4. Absolute Maximum Ratings

| Item                  | Symbol | Min | Typ | Max | Unit |
|-----------------------|--------|-----|-----|-----|------|
| Operating Temperature | TOP    | -20 | —   | +70 | °C   |
| Storage Temperature   | TST    | -30 | —   | +80 | °C   |

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp.  $\leq 60^{\circ}\text{C}$ , 90% RH MAX. Temp.  $> 60^{\circ}\text{C}$ , Absolute humidity shall be less than 90% RH at  $60^{\circ}\text{C}$

Texim Europe



# 5. Electrical Characteristics

## 5.1. Operating conditions:

| Item                   | Symbol | Condition | Min | Typ | Max | Unit | Remark |
|------------------------|--------|-----------|-----|-----|-----|------|--------|
| Supply Voltage For LCM | VDD    | —         | 4.9 | 5   | 5.1 | V    | -      |
| Supply Current For LCM | IDD    | —         | —   | 350 | 380 | mA   | Note1  |

Note 1 : This value is test for VDD =5.0V , Ta=25°C only

Note 2 : Display with Raspberry pi the driver power is over USB , first make sure you have a 2A power supply, with a good quality USB cable, a thin wire power cable is no good. Make sure its 24AWG or smaller, shorter USB cables are better too.

Note3 : CTP driver is base on the mouse driver program and through USB port connect to PC or embedded board.Can only support the single touch.

Texim Europe

## 6.DC CHARACTERISTICS

| Parameter                | Symbol   | Rating |     |        | Unit | Condition |
|--------------------------|----------|--------|-----|--------|------|-----------|
|                          |          | Min    | Typ | Max    |      |           |
| Low level input voltage  | $V_{IL}$ | 0      | -   | 0.3VDD | V    |           |
| High level input voltage | $V_{IH}$ | 0.7VDD | -   | VDD    | V    |           |

Texim Europe

# 7. Optical Characteristics

| Item   | Symbol | Condition.                              | Min                               | Typ. | Max. | Unit              | Remark            |        |
|--|--------|---|-----------------------------------|------|------|-------------------|-------------------|--------|
| Response time                                  | Tr     | $\theta = 0^\circ \cdot \Phi = 0^\circ$ | -                                 | 10   | 20   | .ms               | Note 3,5          |        |
|  | Tf     |   | -                                 | 15   | 30   | .ms               |                   |        |
| Contrast ratio                                 | CR     | At optimized viewing angle              | 400                               | 500  | -    | -                 | Note 4,5          |        |
| Color Chromaticity                             | White  | Wx                                      | $\theta = 0^\circ \cdot \Phi = 0$ | 0.26 | 0.31 | 0.36              | Note 2,6,7        |        |
|  |        | Wy                                      |                                   | 0.28 | 0.33 | 0.38              |                   |        |
| Viewing angle (Gray Scale Inversion Direction) | Hor.   | $\Theta R$                              | $CR \geq 10$                      | 60   | 70   | -                 | Deg.              | Note 1 |
|  |        | $\Theta L$                              |                                   | 60   | 70   | -                 |                   |        |
|  | Ver.   | $\Phi T$                                |                                   | 40   | 50   | -                 |                   |        |
|  |        | $\Phi B$                                |                                   | 60   | 70   | -                 |                   |        |
| Brightness                                     | -      | -                                       | 300                               | 400  | -    | cd/m <sup>2</sup> | Center of display |        |

Ta=25±2°C

Note 1: Definition of viewing angle range

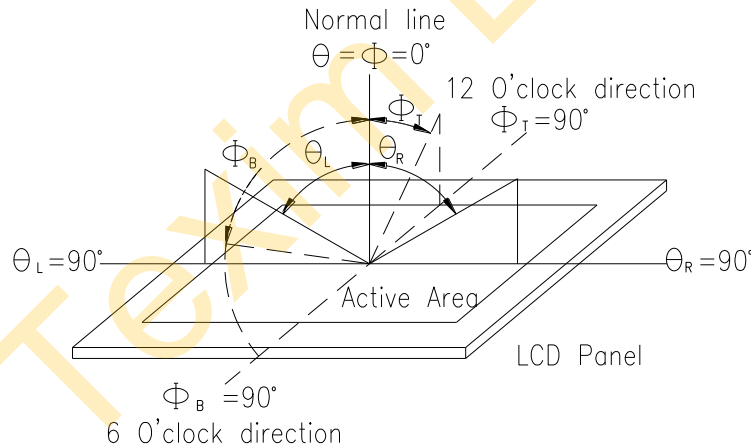


Fig. 7.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


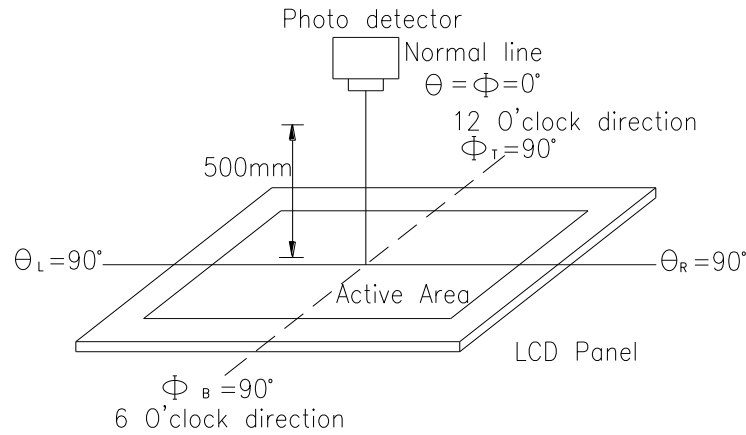


Fig. 7.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Rise time,  $T_r$ , is the time between photo detector output intensity changed from 90% to 10%. And fall time,  $T_f$ , is the time between photo detector output intensity changed from 10% to 90%

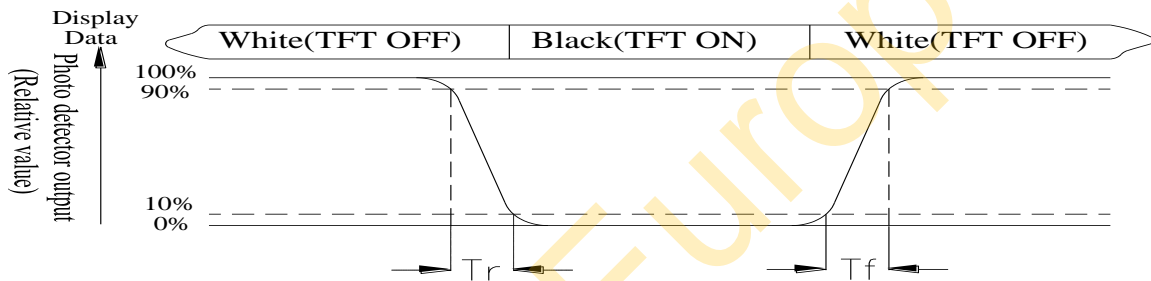

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: White  $V_i = V_{i50} \pm 1.5V$

Black  $V_i = V_{i50} \pm 2.0V$

“±” means that the analog input signal swings in phase with VCOM signal.

“±” means that the analog input signal swings out of phase with VCOM signal.

The 100% transmission is defined as the transmission of LCD panel when all the input terminals of module are electrically opened.

Note 6: Definition of color chromaticity (CIE 1931)

Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.

# 8.Interface

## 8.1. LCM PIN Definition(CON4/CON5)

| Pin | Symbol | Function                               | Remark |
|-----|--------|--|--------|
| 1   | 3.3V   | Raspberry Pi:Power 3.3V                |        |
| 2   | 5V     | Raspberry Pi:Power 5V                  |        |
| 3   | GPIO02 | Raspberry Pi:GPIO02                    |        |
| 4   | 5V     | Raspberry Pi:Power 5V                  |        |
| 5   | GPIO03 | Raspberry Pi:GPIO03                    |        |
| 6   | GND    | Raspberry Pi:GND                       |        |
| 7   | GPIO04 | Raspberry Pi:GPIO04                    |        |
| 8   | GPIO14 | Raspberry Pi:GPIO14                    |        |
| 9   | GND    | Raspberry Pi:GND                       |        |
| 10  | GPIO15 | Raspberry Pi:GPIO15                    |        |
| 11  | GPIO17 | Raspberry Pi:GPIO17                    |        |
| 12  | GPIO18 | Raspberry Pi:GPIO18 (Backlight Enable) |        |
| 13  | GPIO27 | Raspberry Pi:GPIO27                    |        |
| 14  | GND    | Raspberry Pi:GND                       |        |
| 15  | GPIO22 | Raspberry Pi:GPIO22                    |        |
| 16  | GPIO23 | Raspberry Pi:GPIO23                    |        |
| 17  | 3.3V   | Raspberry Pi:3.3V                      |        |
| 18  | GPIO24 | Raspberry Pi:GPIO24                    |        |
| 19  | GPIO10 | Raspberry Pi:GPIO10                    |        |
| 20  | GND    | Raspberry Pi:GND                       |        |
| 21  | GPIO09 | Raspberry Pi:GPIO09                    |        |
| 22  | GPIO25 | Raspberry Pi:GPIO25                    |        |
| 23  | GPIO11 | Raspberry Pi:GPIO11                    |        |
| 24  | GPIO08 | Raspberry Pi:GPIO08                    |        |
| 25  | GND    | Raspberry Pi:GND                       |        |
| 26  | GPIO07 | Raspberry Pi:GPIO07                    |        |
| 27  | ID_SD  | Raspberry Pi:ID_SD                     |        |
| 28  | ID_SC  | Raspberry Pi:ID_SC                     |        |
| 29  | GPIO05 | Raspberry Pi:GPIO05                    |        |
| 30  | GND    | Raspberry Pi:GND                       |        |

|    |        |                     |  |
|----|--------|---------------------|--|
| 31 | GPIO06 | Raspberry Pi:GPIO06 |  |
| 32 | GPIO12 | Raspberry Pi:GPIO12 |  |
| 33 | GPIO13 | Raspberry Pi:GPIO13 |  |
| 34 | GND    | Raspberry Pi:GND    |  |
| 35 | GPIO19 | Raspberry Pi:GPIO19 |  |
| 36 | GPIO16 | Raspberry Pi:GPIO16 |  |
| 37 | GPIO26 | Raspberry Pi:GPIO26 |  |
| 38 | GPIO20 | Raspberry Pi:GPIO20 |  |
| 39 | GND    | Raspberry Pi:GND    |  |
| 40 | GPIO21 | Raspberry Pi:GPIO21 |  |

### 8.2. CTP USB PIN Definition(CON3)

| Pin | Symbol | Function      | Remark |
|-----|--------|---------------|--------|
| 1   | 5V     | Power 5V      |        |
| 2   | D-     | Data line -   |        |
| 3   | D+     | Data line +   |        |
| 4   | NC     | No connection |        |
| 5   | GND    | Power Ground  |        |

# 9. Reliability

Content of Reliability Test (Wide temperature, -20°C ~70°C)


| Environmental Test                   |  |   |      |
|--------------------------------------|--|---|------|
| Test Item                            | Content of Test  | Test Condition  | Note |
| High Temperature storage             | Endurance test applying the high storage temperature for a long time.  | 80°C<br>200hrs  | 2    |
| Low Temperature storage              | Endurance test applying the low storage temperature for a long time.   | -30°C<br>200hrs   | 1,2  |
| High Temperature Operation           | Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.   | 70°C<br>200hrs  | —    |
| Low Temperature Operation            | Endurance test applying the electric stress under low temperature for a long time.   | -20°C<br>200hrs   | 1    |
| High Temperature/ Humidity Operation | The module should be allowed to stand at 60 °C, 90%RH max  | 60°C, 90%RH<br>96hrs  | 1,2  |
| Thermal shock resistance             | The sample should be allowed stand the following 10 cycles of operation<br><div style="text-align: center;"> <p style="margin: 0;">-20°C    25°C    70°C</p> <p style="margin: 0;">30min    5min    30min</p> <p style="margin: 0;">1 cycle</p> </div> | -20°C /70°C<br>10 cycles  | —    |
| Vibration test                       | Endurance test applying the vibration during transportation and using.   | Total fixed amplitude : 1.5mm<br>Vibration Frequency : 10~55Hz<br>One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes | 3    |
| Static electricity test              | Endurance test applying the electric stress to the terminal.   | VS=±600V(contact),<br>±800v(air),<br>RS=330Ω<br>CS=150pF<br>10 times  | —    |

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.


Note3: The packing have to including into the vibration testing.

# 10. Contour Drawing

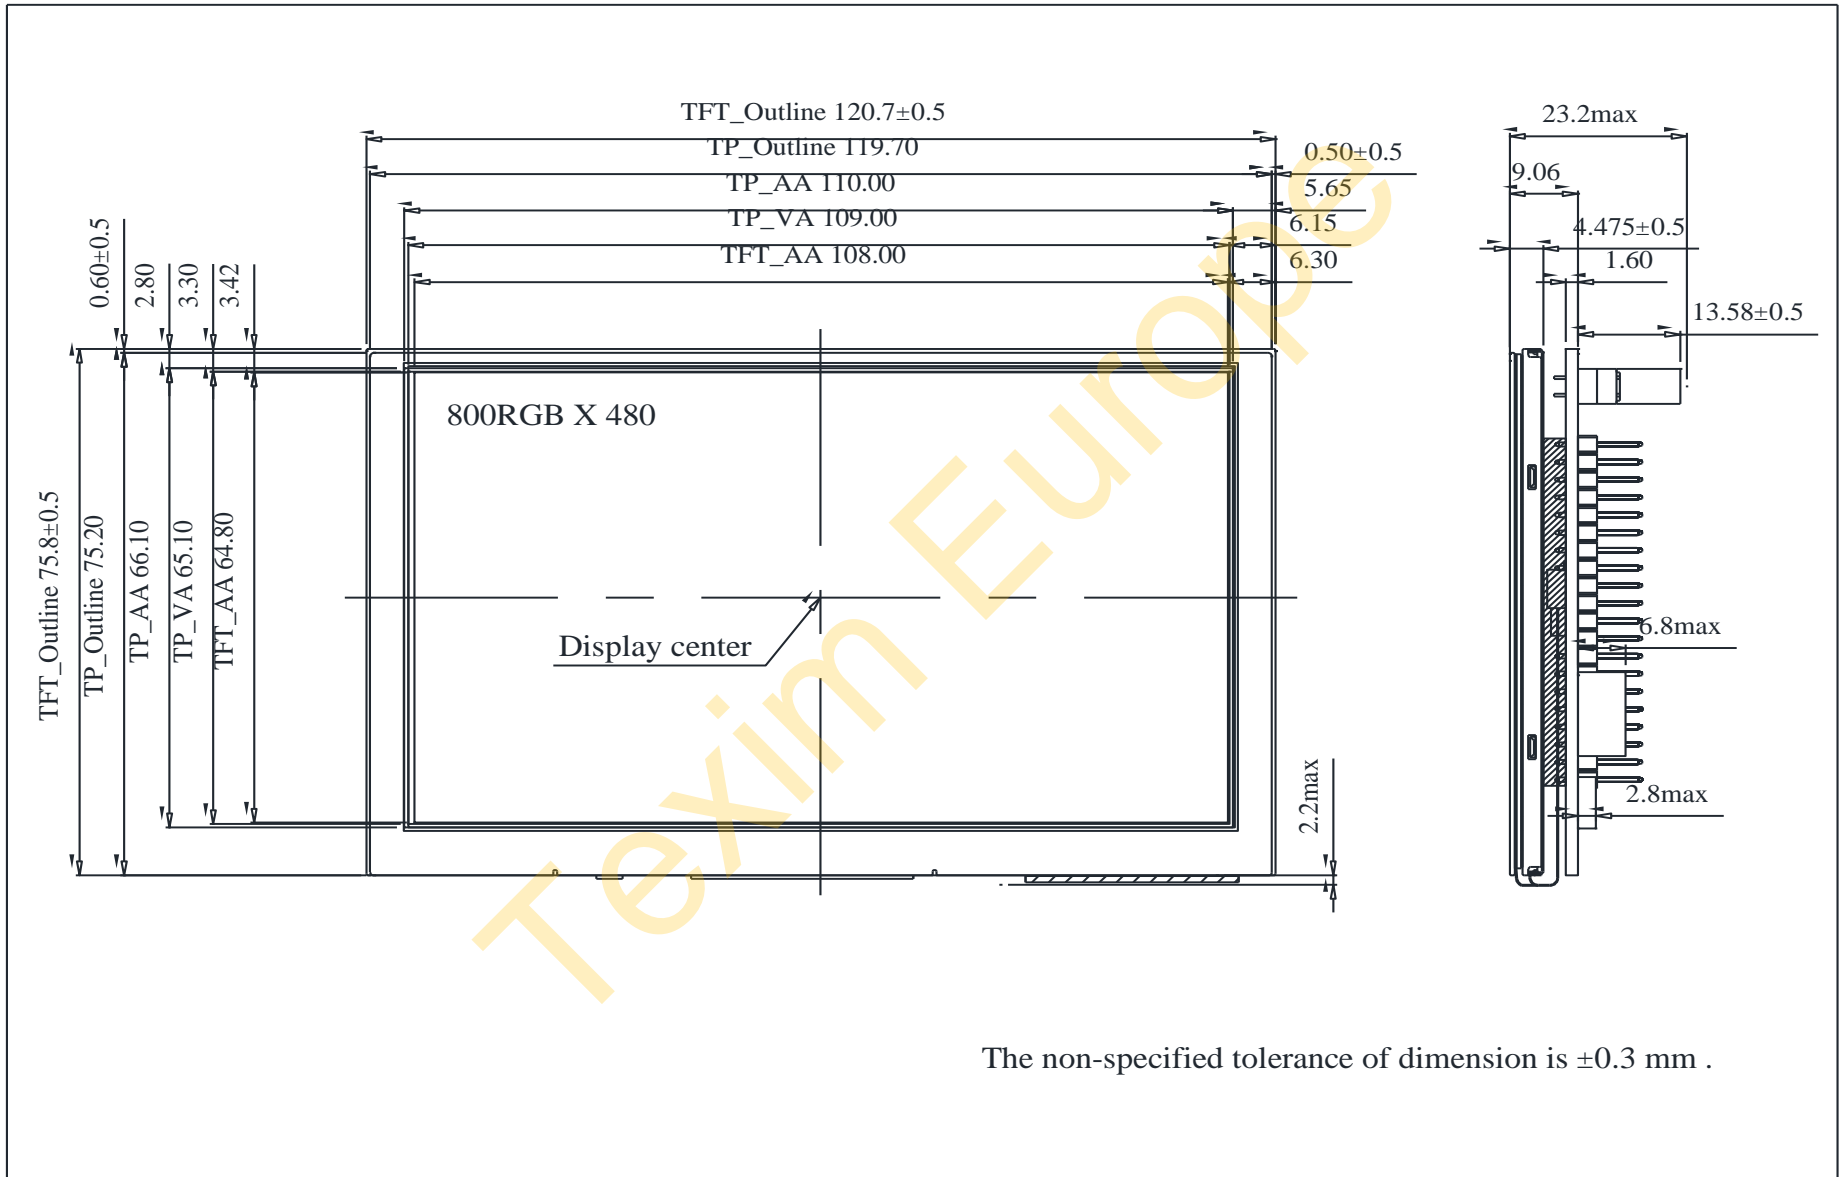

The non-specified tolerance of dimension is  $\pm 0.3$  mm .



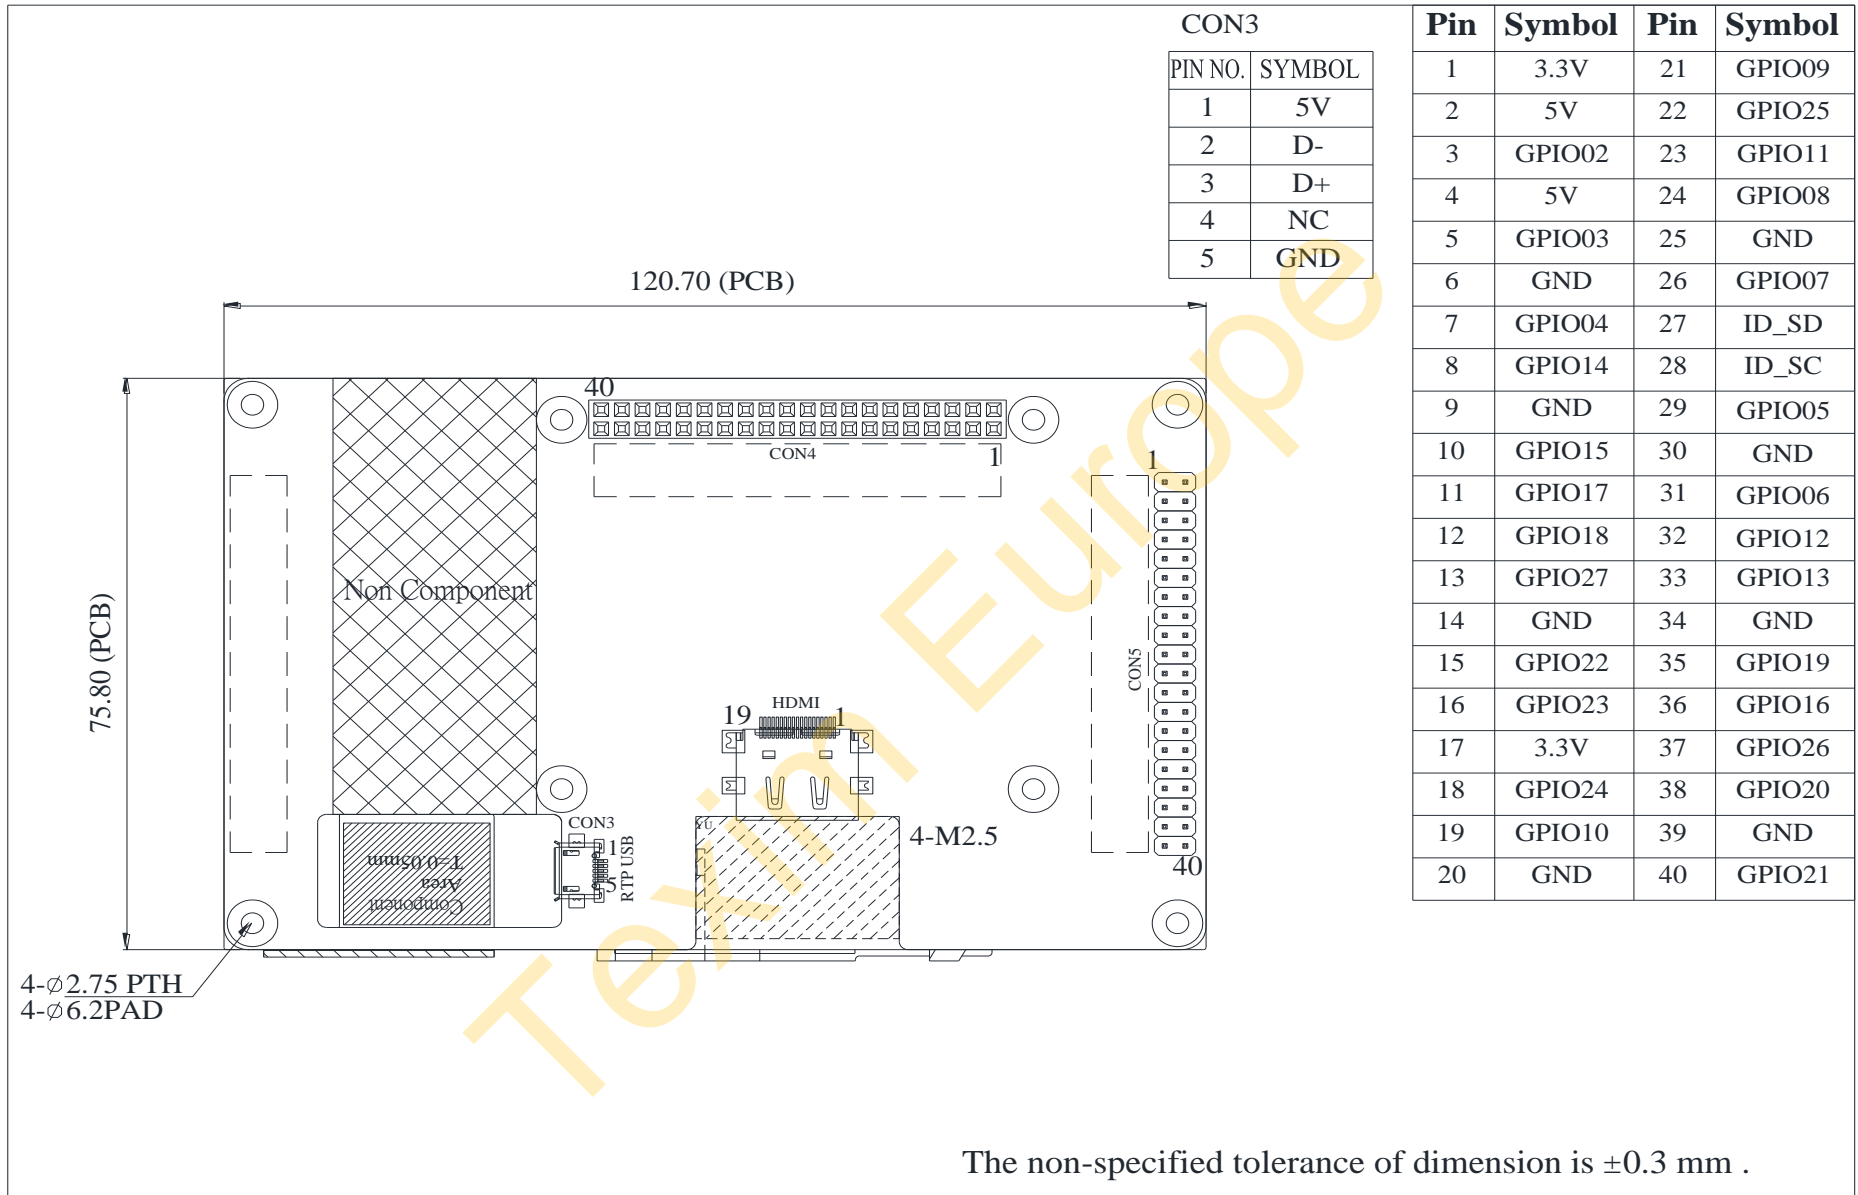



**1、Panel Specification :**

- 1. Panel Type :  Pass  NG , \_\_\_\_\_
- 2. View Direction :  Pass  NG , \_\_\_\_\_
- 3. Numbers of Dots :  Pass  NG , \_\_\_\_\_
- 4. View Area :  Pass  NG , \_\_\_\_\_
- 5. Active Area :  Pass  NG , \_\_\_\_\_
- 6. Operating Temperature :  Pass  NG , \_\_\_\_\_
- 7. Storage Temperature :  Pass  NG , \_\_\_\_\_
- 8. Others : \_\_\_\_\_

**2、Mechanical Specification :**

- 1. PCB Size :  Pass  NG , \_\_\_\_\_
- 2. Frame Size :  Pass  NG , \_\_\_\_\_
- 3. Material of Frame :  Pass  NG , \_\_\_\_\_
- 4. Connector Position :  Pass  NG , \_\_\_\_\_
- 5. Fix Hole Position :  Pass  NG , \_\_\_\_\_
- 6. Backlight Position :  Pass  NG , \_\_\_\_\_
- 7. Thickness of PCB :  Pass  NG , \_\_\_\_\_
- 8. Height of Frame to PCB :  Pass  NG , \_\_\_\_\_
- 9. Height of Module :  Pass  NG , \_\_\_\_\_
- 10. Others :  Pass  NG , \_\_\_\_\_

**3、Relative Hole Size :**

- 1. Pitch of Connector :  Pass  NG , \_\_\_\_\_
- 2. Hole size of Connector :  Pass  NG , \_\_\_\_\_
- 3. Mounting Hole size :  Pass  NG , \_\_\_\_\_
- 4. Mounting Hole Type :  Pass  NG , \_\_\_\_\_
- 5. Others :  Pass  NG , \_\_\_\_\_

**4、Backlight Specification :**

- 1. B/L Type :  Pass  NG , \_\_\_\_\_
- 2. B/L Color :  Pass  NG , \_\_\_\_\_
- 3. B/L Driving Voltage (Reference for LED Type) :  Pass  NG , \_\_\_\_\_
- 4. B/L Driving Current :  Pass  NG , \_\_\_\_\_
- 5. Brightness of B/L :  Pass  NG , \_\_\_\_\_
- 6. B/L Solder Method :  Pass  NG , \_\_\_\_\_
- 7. Others :  Pass  NG , \_\_\_\_\_

>> **Go to page 2** <<



Winstar      Module Number : \_\_\_\_\_

Page: 2

**5、Electronic Characteristics of Module :**

- |                              |                               |                                     |
|------------------------------|-------------------------------|-------------------------------------|
| 1. Input Voltage :           | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 2. Supply Current :          | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 3. Driving Voltage for LCD : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 4. Contrast for LCD :        | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 5. B/L Driving Method :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 6. Negative Voltage Output : | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 7. Interface Function :      | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 8. LCD Uniformity :          | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 9. ESD test :                | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |
| 10. Others :                 | <input type="checkbox"/> Pass | <input type="checkbox"/> NG , _____ |

**6、Summary :**

Sales signature : \_\_\_\_\_

Customer Signature : \_\_\_\_\_

Date :      /      /      \_\_\_\_\_

Texim Europe