



# Front VIEW

# Back VIEW

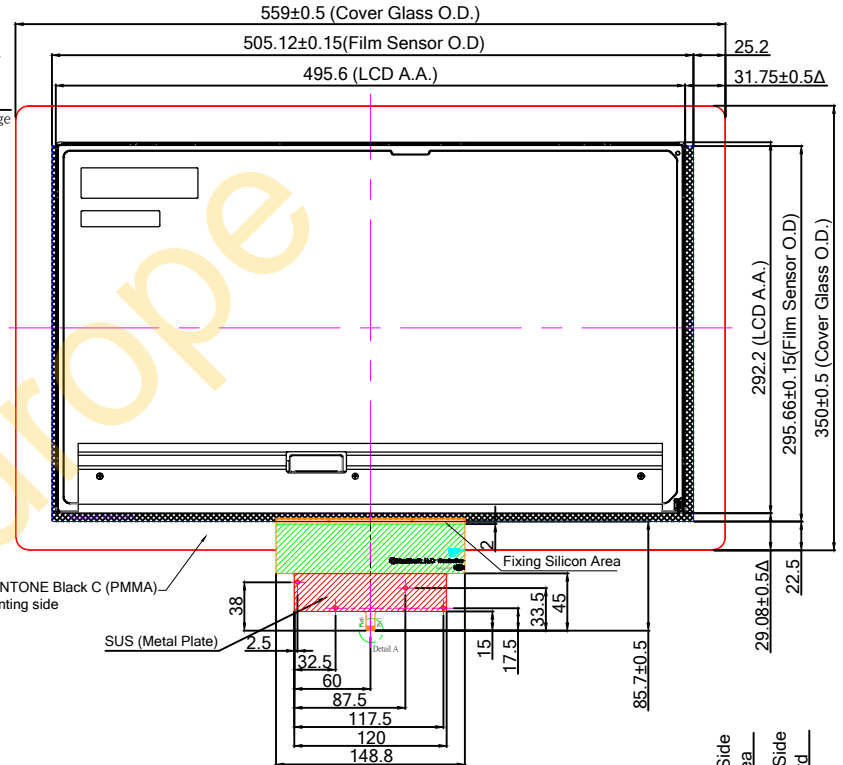


Distributed by:

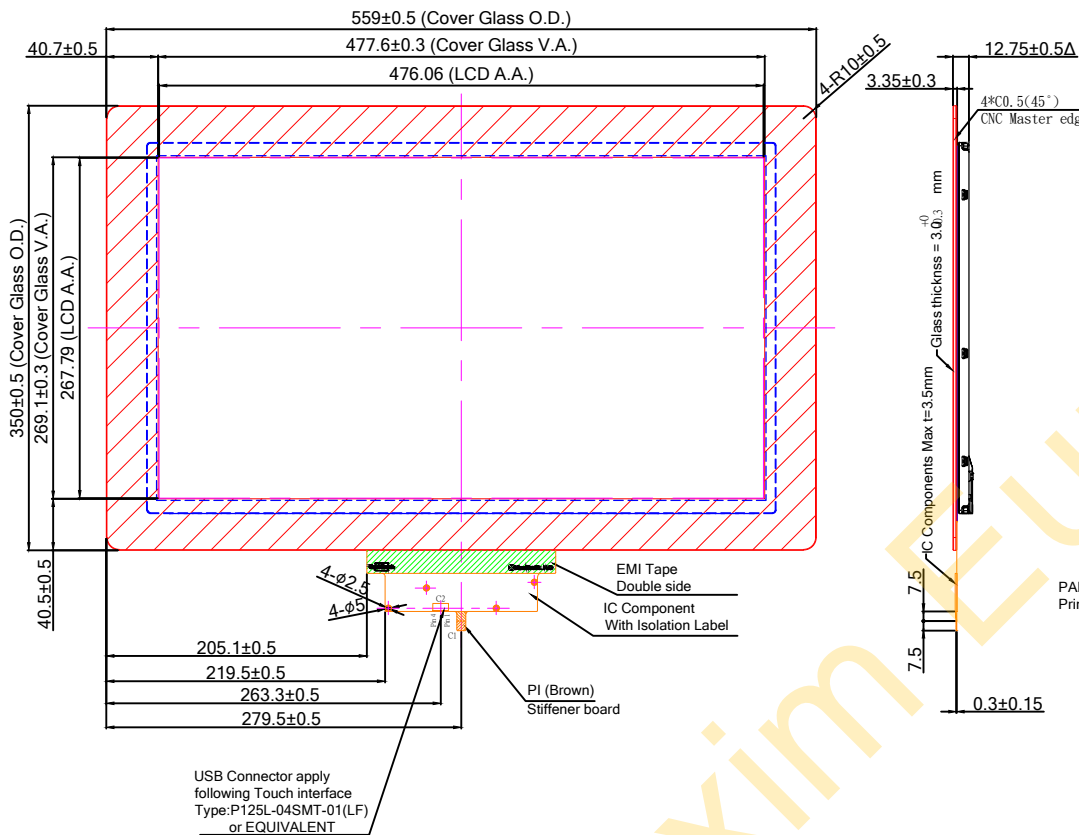

C1:USB Interface	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD
Pin 05	NC
Pin 06	RST

C2:Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD



Detail A

## Note:

1. Tolerance: +/-0.3mm
2. Touch finger input or special conductive pen
3. Touch Surface Hardness: 6H (Semi Tempered Glass)
4. Touch Transmittance: >85% (JIS-K7105)
5. Touch Surface Treatment: None
6. If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
7. USB max ripple acceptable is 50mV, in other case touch will not work correctly
8. Referring to the integration guide to avoid any integration noise issue
9. LCD model : FL : FLC-215MML2000SA1
10. Touch model : RTPC215W-H30BP1-U
11. Assembly Solution : DSA

Customer Approval		Part Number		FLD-215MML20PUSA1	
Date	Rev. Date	Person	Description		
	01	20170823 Kevin	Update Touch design		
Name					
Signature					
First Drawing	Date	Design By	Date	Check By	Date
	20170801	Kevin			

