




PCB connectors > Male headers
Low profile, straight, □ 0.635 mm

Features

grid	2.54 mm
no. of contacts	2 - 72
contact material	CuSn alloy
surface of contact	<ul style="list-style-type: none"> selective gold-plated gold-plated tin-plated
surface contact / contact sleeve	<ul style="list-style-type: none"> Ni+≥0.2µm Au Ni+4...6µm Sn
version	low profile
volume resistance	≤5 mΩ
nominal current	3 A
nominal voltage	250 V AC
test voltage	2000 V
insulating body material	PA 4.6. GF
temperature range	<ul style="list-style-type: none"> -40°C... +163°C (260°C/10 s)
class of inflammability	UL 94 V-0
specific insulation resistance	>10.10 ^{7.0} Ω m
connection type	-
reflow solderable	yes

Technical Drawing

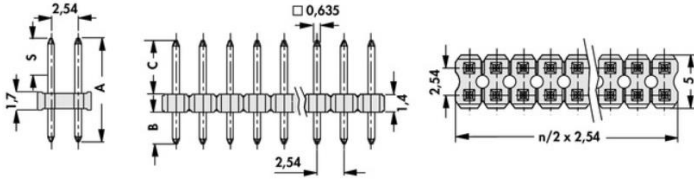

height 13.9

A [mm]	3
B [mm]	9.2
C [mm]	5.0
S [mm]	5.0

Distributed by:



www.texim-europe.com