


Data Sheet

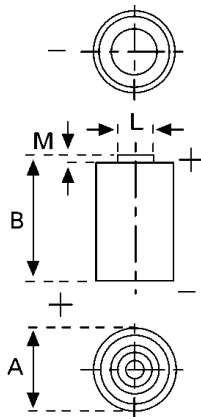

Type Number 6205
Designation IEC CR 17345
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition MH 13654
Nominal Voltage 3 V
Typical Capacity C 1450 mAh
 Current 20 mA, at 20°C down to 2,0 V

Weight (approx.) 17 g
Volume 7 ccm
Coding Date of Manufacturing Month / Year

Temperature Ranges

	min.	max.
Storage	-20°C	45°C
Discharge	-40°C	70°C*

Dimensions

	min.	max.
Diameter (A)	16,20	16,80
Height (B)	33,50	34,50
Shoulder Diameter [L]	6,00	6,60
Shoulder Height [M]	1,20	1,70

Typical Capacities (at 20°C)



Discharge Type	Discharge Current	End Voltage:	2,0 V
Continuous 24h/d,7d/w	20 mA	Capacity [mAh]:	1450


* Contact VARTA if the application is intended to be outside the range of -20°C to +60°C.

Information and contents in this data sheet are for reference purpose only.
 They do not constitute any warranty or representation and are subject to change without notice.
 For most current information and further details, please contact your VARTA representative.


Data Sheet

Performance Data:


• **Temperature Characteristics**

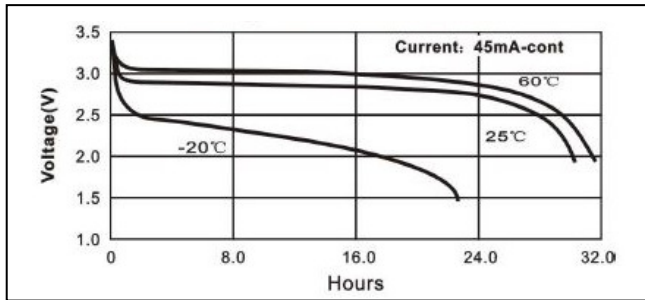

• **Pulse discharge characteristics**

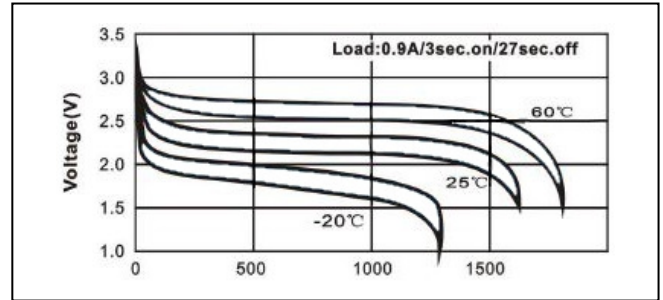

• **Discharge Characteristics**

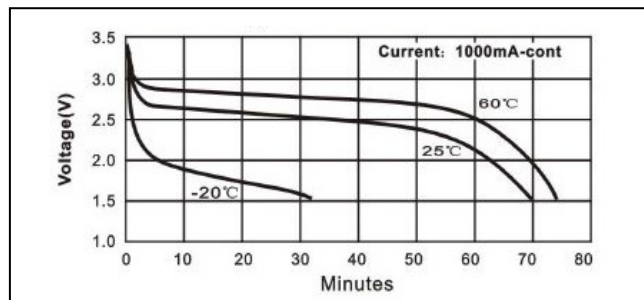

- Self-discharge rate < 1% at room temperature
- Storage life > 10 years
- Operating life* > 10 years

* depending on environmental condition and energy consumption

*Information and contents in this data sheet are for reference purpose only.
They do not constitute any warranty or representation and are subject to change without notice.
For most current information and further details, please contact your VARTA representative.*