


RRC-SMB-DBC

Dual bay standard battery charger
for smart batteries

Distributed by:

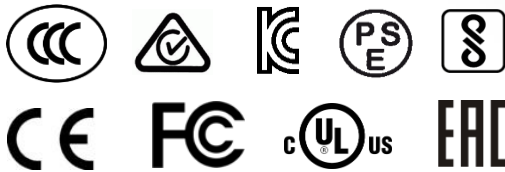

Features:

- Dual bay fast charger
- For the standard battery form factors RRC20xx or smart batteries with a similar footprint
- Optimized charging process for RRC batteries:
 - Longer cycle life
 - Faster charging
- Simple operation – Plug and Play
- Automatic recognition and calibration of smart battery learned capacity
- External power supply for worldwide use
- Country specific AC input cables available

Applications:

Standard charging station for mobile devices used in medical, industrial and consumer markets

Specification

Input	
Voltage range	19.00 – 26.00VDC
Current	3.40A max.
Power	65.00W

Output	
Voltage range	0 - 17.40VDC
Current range	0 - 4.80A
Voltage tolerance ⁽¹⁾	±1% max.
Current tolerance ⁽¹⁾	±10% max. @1.00A, ±3% max. @4.00A
Charge power	30.00W max. per Bay
Protection	Short circuit, over temperature shutdown, input-/output over current

Environmental		
Cooling	convection cooled	
Temperature	Operating: 0°C to 50°C	Non-operating: -10°C to 70°C
Pressure & Altitude	Operating: 1060hPa to 795hPa -382m to 2000m	Non-operating: 1060hPa to 572hPa -382m to 4570m
Humidity	5% to 95% r.H., non-condensing	

General	
Efficiency ⁽²⁾	~95% at 100% load
Indicator	Multi-color LED (green, red, orange)
Battery types	Standard battery form factors RRC2020, 2024, 2040, 2040-2, 2054, 2054-2, 2057 or smart batteries with a similar footprint
Green procurement	RoHS 2011/65/EU WEEE 2012/19/EU Chinese RoHS

LED Indications	
One time Red/Orange/Green	Self-test: Charger is ready for use.
Red/Green blinking	Battery recognition and initialization.
Orange blinking	The battery is currently being calibrated.
Orange light	The inserted battery is of the correct type and is currently being charged.
Green light	The battery is charged and can be removed for use.
Red blinking	The battery is too hot or too cold to be charged without damage. If the battery is too cold it will be charged as soon as it has warmed up sufficiently. If the battery is too hot it should be removed to cool down.
Red light	The battery is damaged or it is a conventional battery which cannot be recharged.

Charger Mechanical Details	
Housing dimensions (LxWxH)	155 x 175 x 43mm
Weight	325g (excluding power supply)

Safety & EMC	In combination with included external AC/DC power supply	
Regulatory approvals	Europe	CE
	International	CB
Electromagnetic Emissions	Europe	EN55011, EN55032, level B
	USA	FCC15 class B
Electromagnetic Immunity	ESD immunity	EN/IEC61000-4-2
	Electromagnetic field immunity	EN/IEC61000-4-3
	EFT / Burst	EN/IEC61000-4-4
	Surge	EN/IEC61000-4-5
	Conducted Immunity	EN/IEC61000-4-6
	Magnetic Fields	EN/IEC61000-4-8
	Voltage dips, short instrumentations & voltage variations	EN/IEC61000-4-11
Immunity characteristics	EN55024	

Specification external AC/DC power supply

Input		
Voltage range	100.00 – 240.00VAC	
Current	1.70A max.	
Stand by power	No load < 0.50W @ 230.00VAC	
Output		
Voltage range	19.00VDC	
Power	65.00W max.	
Current range	3.40A	
Protection	Over voltage, over current, short circuit	
Environmental		
Temperature	Operating: 0°C to 40°C	Non-operating -10°C to 70°C
General		
Efficiency	California's Energy Efficiency Level VI	
Ripple & Noise	300mV (p-p)	
Power Supply Mechanical Details		
Standard output connector	DC barrel jack, 5.5x2.5mm	
Housing dimensions (LxWxH)	95 x 50 x 25.4mm	
Weight	270g	
Regulatory Approvals		
Approvals	Europe International USA/Canada Australia Russia (Customs Union) Korea China Japan India	CE CB cULus RCM EAC KC CCC PSE BIS

Germany/Headquarters

RRC power solutions GmbH
Technologiepark 1
66424 Homburg / Saar

Tel.: +49 6841 98090
Fax: +49 6841 9809280
Email: sales@rrc-ps.de
Web: www.rrc-ps.de

USA

RRC power solutions Inc.
18340 Yorba Linda Blvd.,
107-437 Yorba Linda,
CA 92886-4104

Tel.: +1 714 777 3604
Fax: +1 714 777 3658
Email: usa@rrc-ps.com
Web: www.rrc-ps.com

Hong Kong

RRC power solutions Ltd.
S-V,6/F, Valiant Industrial
Centre 2-12 Au Pui Wan Street
Fo Tan, N.T., Hong Kong

Tel.: +852 2376 0106
Fax: +852 2375 0107
Email: hkrrc@rrc-ps.cn
Web: www.rrc-ps.com

China

RRC power solutions Ltd.
Room 1306, C Building,
Tianan International building,
Renmin South Road, Luohu
District, Shenzhen 518021

Tel.: +86 755 8374 1908
Fax: +86 755 8374 1861
Email: hkrrc@rrc-ps.cn
Web: www.rrc-ps.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com