

# Li-ion Capacitor

## WUHAN FANSO TECHNOLOGY CO., LTD

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan city, China  
 PC: 430051 Tel: 027-84453055, 84453199 Fax: 027-84453116  
 Http://www.fansobattery.com Email: overseas@fansobattery.com




# Li-ion Capacitor



Distributed by:  [www.texim-europe.com](http://www.texim-europe.com)



## Li-ion Capacitor

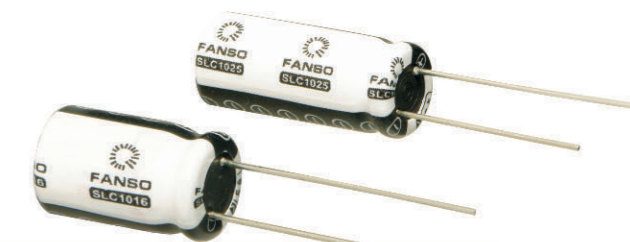

Li-ion Capacitor, produced and designed by Fanso, can deliver instantly big pulse and work in a wide temperature range from  $-40^{\circ}\text{C}$  up to  $85^{\circ}\text{C}$ . Fanso SLC pulse power system consists of long-life Li-SOCl<sub>2</sub> battery and Li-ion Capacitor, which are connected in parallel. It is an ideal power source for intelligent meters and other applications requiring high pulse current.

### Features:

- Long life and high pulse in one
- Sustainable big pulse
- Excellent performance at high/low temperature
- Good pulse capability
- No voltage delay
- High safety and reliability
- long storage life and low self-discharge

### Applications:

- Data collector
- Emergency rescue system
- GPS
- RFID
- Remote wireless transmission system
- Communications equipment
- Cargo Tracking




Power System Model

Model	Nominal Voltage/V	Nominal capacity/mAh	Max. pulse current/A	Dimensions/mm
ER batteries+SLC				
ER14250+SLC1016	3.6	1200	0.5	25 × 14.5 × 26.5
ER14505+SLC1016	3.6	2600	0.5	25 × 14.5 × 53
ER17505+SLC1016	3.6	3600	0.5	28 × 17 × 53
ER18505+SLC1016	3.6	4100	0.5	29 × 18.5 × 53
ER26500+SLC1016	3.6	8500	0.5	37 × 26.2 × 53
ER34615+SLC1016	3.6	19000	0.5	44.5 × 34.2 × 64
ER14250+SLC1025	3.6	1200	2	25 × 14.5 × 26.5
ER14505+SLC1025	3.6	2600	2	25 × 14.5 × 53
ER17505+SLC1025	3.6	3600	2	28 × 17 × 53
ER18505+SLC1025	3.6	4100	2	29 × 18.5 × 53
ER26500+SLC1025	3.6	8500	2	37 × 26.2 × 53
ER34615+SLC1025	3.6	19000	2	44.5 × 34.2 × 64

SLC Mode

Model	Dimensions	Max. Charging Voltage/V	Max. Capacity (3.65V) /mAh	Max. Discharge current/mA		Cut-off/V	ESR /mΩ
				Constant	Pulse		
SLC1016	Φ10 × 16	3.95	15	300	500	2.5	250
SLC1025	Φ10 × 25	3.95	40	1000	2000	2.5	100

# SLC1016 Li-ion Capacitor

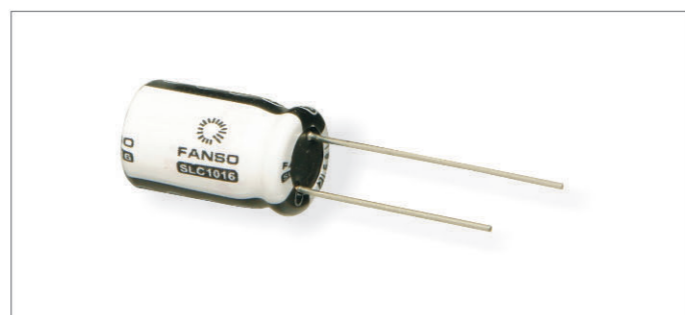

Electrical Performance ( typical values relative to cells stored for one year or less at room temperature)



Capacity when charge to 3.65 V ( 2.5V cut-off ) -----12mAh  
Capacity when charge to 3.95 V ( 2.5V cut-off ) -----15mAh

Notes: If discharged voltage is lower than 2.5V, the resistance of SLC1016 will increase.

Operating conditions


Maximum Continuous discharge current-----300mA  
Maximum Continuous Pulse current -----500mA  
Max. charge voltage-----3.95V  
Max. charge current-----50mA  
Operating temperature range-----40~+85°C  
Storage temperature range -----40~+60°C  
ESR ( AC ) -----250mΩ  
Self-discharge at RT-----0.25 μ A

Typical curves of SLC1016

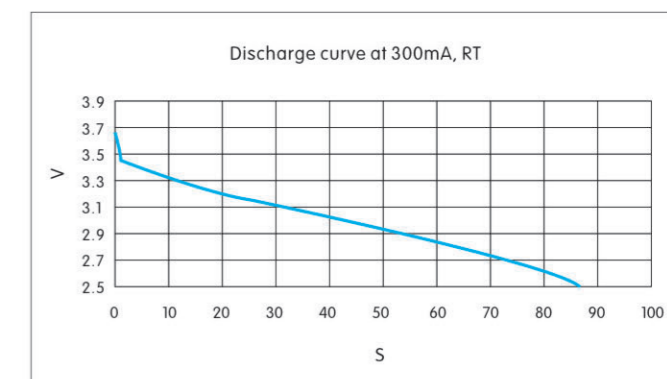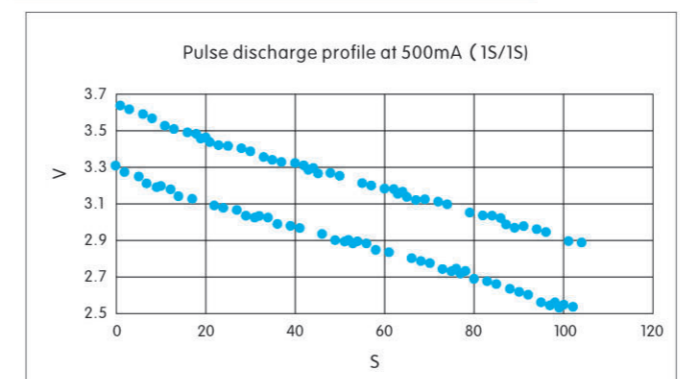


Dimensions

Diameter: 10.0mm  
Length: 16.0mm  
Weight: 2.5g

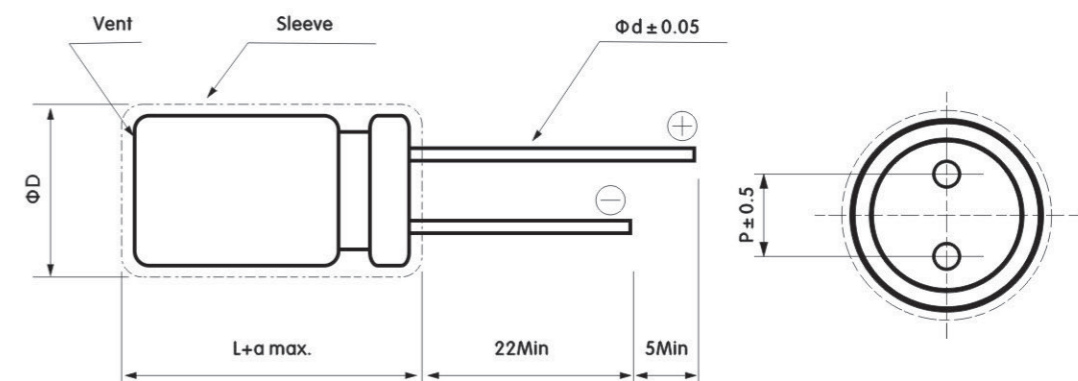


# SLC1025 Li-ion Capacitor

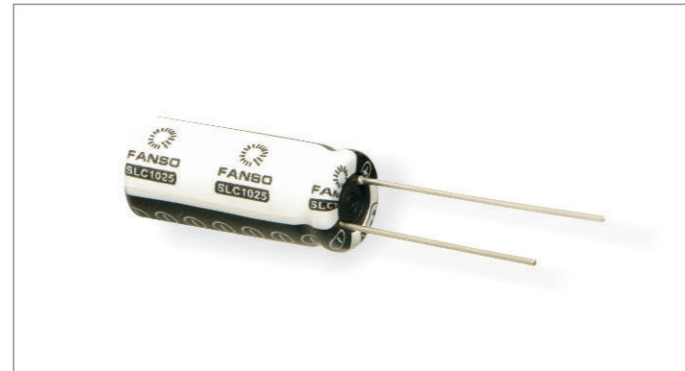

### Dimensions

Diameter: 10.0mm  
Length: 25.0mm  
Weight: 3.9g

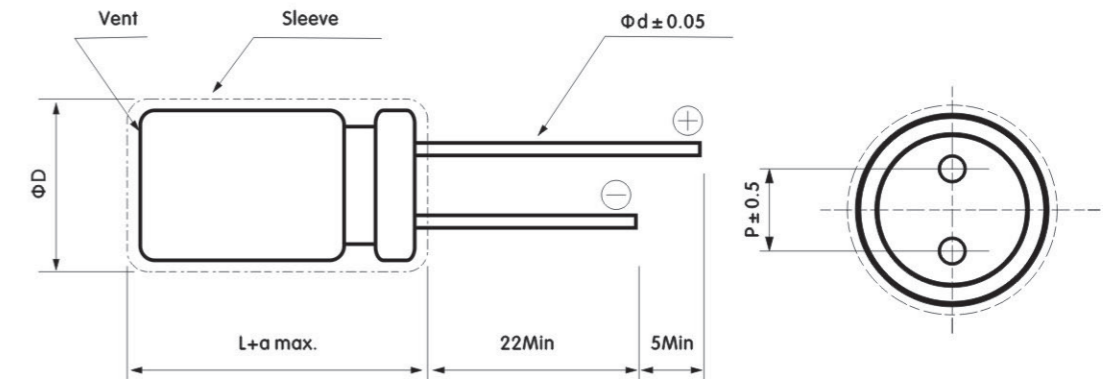

Electrical Performance (typical values relative to cells stored for one year or less at room temperature)



Capacity when charge to 3.65 V ( 2.5V cut-off) -----40mAH  
Capacity when charge to 3.95 V ( 2.5V cut-off) -----45mAH

Notes: If discharged voltage is lower than 2.5V, the resistance of SLC1025 will increase.

Typical curves of SLC1025

### Operating conditions

Maximum Continuous discharge current-----1000mA  
Maximum Continuous Pulse current -----2000mA  
Max. charge voltage-----3.95V  
Max. charge current-----50mA  
Operating temperature range-----40~+85°C  
Storage temperature range -----40~+60°C  
ESR ( AC ) -----100mΩ  
Self-discharge at RT-----0.25 μ A

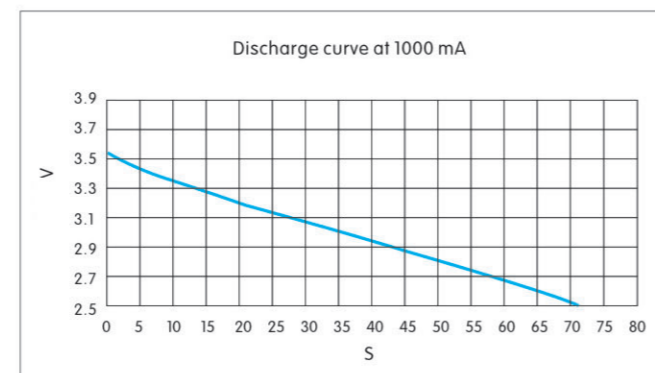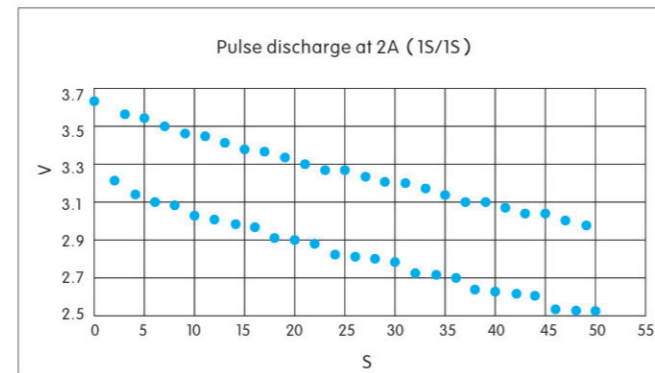

Model	Dimensions			
	D/mm	p/mm	L/mm	d/mm
SLC1016	10.0 ± 0.5	5.0 ± 0.5	16.0 ± 0.2	0.6 ± 0.05
SLC1320	10.0 ± 0.5	5.0 ± 0.5	25.0 ± 0.2	0.6 ± 0.05

### equipments & Mass production



production capacity and scale are still growing, owing to advanced automatic equipments and analytical testers.

## The Netherlands



Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
F: +31 (0)53 573 33 30  
E: nl@texim-europe.com

## Belgium



Zuiderlaan 14 bus 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
F: +32 (0)2 462 01 25  
E: belgium@texim-europe.com


## UK & Ireland



St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
F: +44 (0)845 299 22 26  
E: uk@texim-europe.com

## Nordic region



Sdr. Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
F: +45 88 20 26 39  
E: nordic@texim-europe.com

## Germany North



Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
F: +49 (0)4106 627 07-20  
E: germany@texim-europe.com

## Germany South



Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
F: +49 (0)89 436 086-19  
E: germany@texim-europe.com

## Austria



Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
F: +43 (0)662 216 026-66  
E: austria@texim-europe.com

## Italy



Via Matteotti 43  
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293  
F: +39 (0)39 971 3293  
E: italy@texim-europe.com