

FEATURES

- ▶ Fully Encapsulated Plastic Case for PCB, Chassis and DIN-Rail Mounting Version
- ▶ Universal Input 85-264VAC
- ▶ Protection Class II as per IEC/EN 60536
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -10°C to +70°C
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55011/32 Class B & FCC Level B Approved
- ▶ EMC Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- ▶ UL508 Safety Approval (Option) Specifically for Industrial Application
- ▶ UL/cUL/IEC/EN 60950-1 Safety Approval & CE Marking


PRODUCT OVERVIEW

The MINMAX AZF-60 series is a new range of fully encapsulated AC-DC power supply modules. The product features EMI emission EN 55011/32 class B approved and EMS compliance to EN 61000-4 standard. Universal input voltage 85-264VAC and International safety approvals qualifies these power modules for applications in products with worldwide markets. For industrial applications, the models for chassis mounting can also be supplied as option with UL508 approval.

The AZF-60 series provide a cost effective solution for many space critical applications in commercial and industrial electronic equipment.

Model Selection Guide

Model Number PCB Mounting	Output Voltage VDC	Output Current Max. mA	Input Current 115VAC, 60Hz		Max. capacitive Load μF	Efficiency (typ.) @Max. Load %
			@Max. Load mA(typ.)	@No Load mA(typ.)		
			AZF-60S051	5.1		
AZF-60S12	12	5000	1060	50	3900	82
AZF-60S15	15	4000	1047	50	3300	83
AZF-60S24	24	2500	1035	50	1500	84
AZF-60S36	36	1666	1035	50	1000	84
AZF-60S48	48	1250	1035	50	680	84

Input Specifications

Parameter	Conditions / Model		Min.	Typ.	Max.	Unit
Input Voltage Range	All Models		85	---	264	VAC
Input Frequency Range			47	---	63	Hz
Input Voltage Range			120	---	370	VDC
Inrush Current	115VAC	Cold Start at 25°C	---	---	30	A
	230VAC		---	---	50	A

Output Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy		---	±1.0	±2.0	%	
Line Regulation	Vin=Min. to Max. @Full Load	---	±0.2	±1.0	%	
Load Regulation	Io=10% to 100%	---	±0.5	±1.0	%	
Ripple & Noise	0-20 MHz Bandwidth	5.1VDC Output Model	---	2.0	3.0	%V _{PP} of Vo
		Other Output Models	---	1.0	1.3	%V _{PP} of Vo
Minimum Load		---	10	---	%Inom.	
Over Voltage Protection	Zener diode clamp	---	120	---	% of Vo	
Transient Response Deviation	(I _{out} =100% to I _{out} =50%)		±3	±6	%	
Temperature Coefficient		---	±0.02	---	%/°C	
Overshoot		---	---	5	% Vout	
Over Load Protection	Foldback, auto-recovery (long term overload condition may cause damage)	105	---	---	%Inom.	
Short Circuit Protection	Hiccup mode, Automatic Recovery					

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	Input to Output, 60 Seconds	3000	---	---	VACrms
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	100	---	KHz
Hold-up Time		---	20	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	125,000			Hours
Protection Class II	According IEC/EN 60536				
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)				
	UL/cUL 508 listed certificate				

Environmental Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range	Natural Convection	-10	---	+70	°C
Power Derating (5.1Vout)	+40°C to +70°C	5.1V Output Model		2.25	W / °C
Power Derating	+50°C to +70°C	Other Output Models		2.25	W / °C
Storage Temperature Range		-40	---	+85	°C
Thermal Shutdown	Shutdown, Internal IC Junction Temperature	---	142	---	°C
	Automatic Recovery, Internal IC Junction Temperature	---	67	---	°C
Humidity (non condensing)		---	---	95	% rel. H
Cooling	Natural Convection				
Lead Temperature (1.5mm from case for 10Sec.)		---	---	260	°C


EMC Specifications

Parameter	Standards & Level	Performance
EMI	Conduction and Radiation	EN 55011, EN 55032, EN 61000-6-4, EN 61000-6-3, FCC part 15, part 18
		EN 55024, EN 61000-6-2, EN 61000-6-1
EMS	ESD	EN 61000-4-2 Air ± 8kV, Contact ± 4kV
	Radiated immunity	EN 61000-4-3 10V/m
	Fast transient	EN 61000-4-4 ±2kV
	Surge	EN 61000-4-5 ±1kV
	Conducted immunity	EN 61000-4-6 10Vrms
	PFMF	EN 61000-4-8 30A/m
	Dips	EN 61000-4-11 30% 10ms
	Interruptions	EN 61000-4-11 >95% 5000ms

Notes

- All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- These power modules require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage the power supplies however they may not meet all listed specifications.
- Other input and output voltage may be available, please contact factory.
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- Specifications are subject to change without notice

Package Specifications PCB Mounting

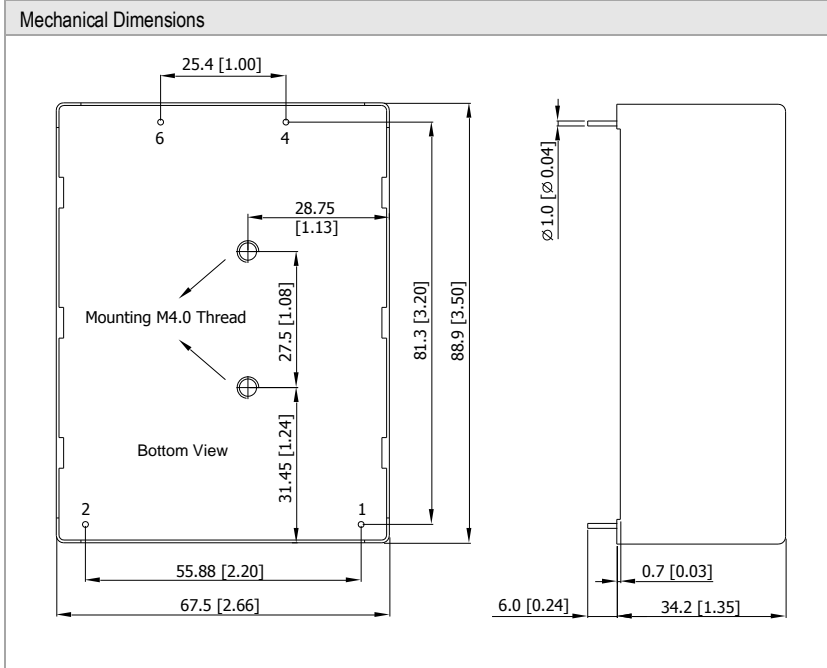

Pin Connections


Pin	Function
1	AC(N) – AC Neutral
2	AC(L) – AC Line
4	+Vout
6	-Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 1.0 (± 0.04)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.1$ (0.04 ± 0.004)

Physical Characteristics

Case Size	: 88.9x67.5x34.2mm (3.50x2.66x1.35 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy with Gold Plate Over Nickel Subplate
Weight	: 345g

Package Specifications Chassis Mounting (order code suffix C)

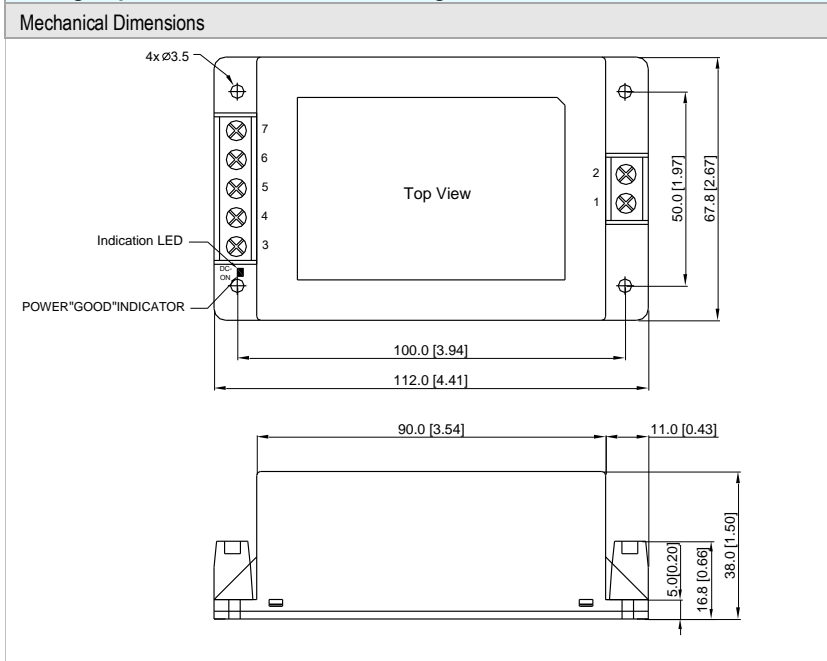

Connections

Terminal	Function
1	AC(N) – AC Neutral
2	AC(L) – AC Line
3	NC
4	+Vout
5	NC
6	-Vout
7	NC

NC: No Connection


- ▶ All dimensions in mm (inches)
- ▶ Tolerance: ± 1.0 (± 0.04)

Physical Characteristics

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 332g

Package Specifications with DIN Rail Mounting Bracket


Mechanical Dimensions

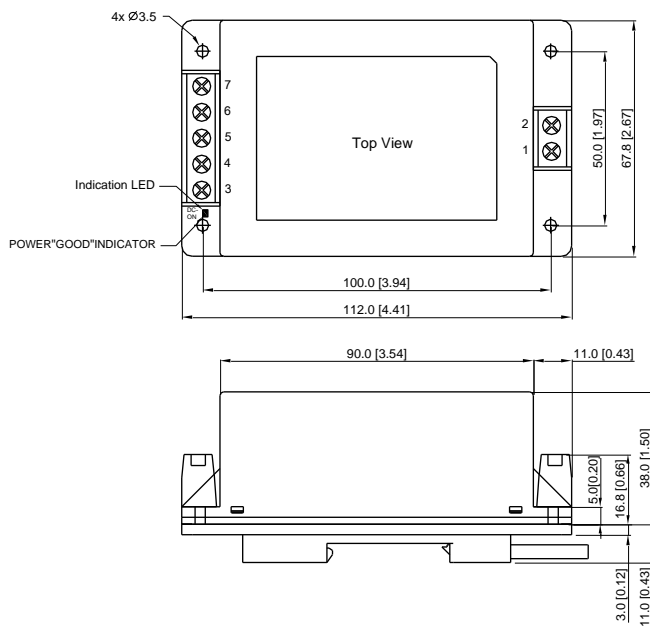

Physical Characteristics

Case Size	: 112.0x67.8x38.0mm (4.41x2.67x1.50 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Weight	: 386g

DIN-Rail Mounting Bracket (Order Code for Kit : AC-DIN-02)

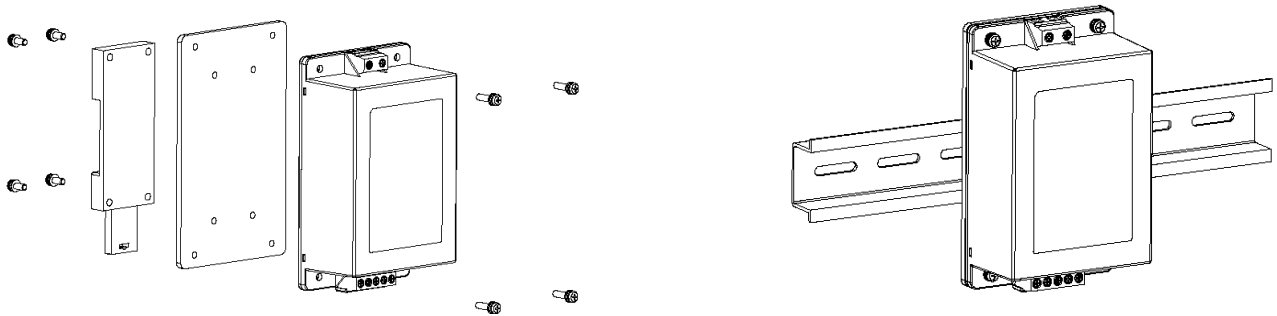

Order Code Table

PCB Mounting	Chassis Mounting	PCB Mounting With UL508	Chassis Mounting With UL508	With DIN Rail Mounting by two Order Code		Chassis Mounting with UL508 & DIN Rail Mounting by two Order Code	
AZF-60S051	AZF-60S051C	AZF-60S051ICE	AZF-60S051CICE	AZF-60S051C	AC-DIN-02	AZF-60S051CICE	AC-DIN-02
AZF-60S12	AZF-60S12C	AZF-60S12ICE	AZF-60S12CICE	AZF-60S12C	AC-DIN-02	AZF-60S12CICE	AC-DIN-02
AZF-60S15	AZF-60S15C	AZF-60S15ICE	AZF-60S15CICE	AZF-60S15C	AC-DIN-02	AZF-60S15CICE	AC-DIN-02
AZF-60S24	AZF-60S24C	AZF-60S24ICE	AZF-60S24CICE	AZF-60S24C	AC-DIN-02	AZF-60S24CICE	AC-DIN-02
AZF-60S36	AZF-60S36C	AZF-60S36ICE	AZF-60S36CICE	AZF-60S36C	AC-DIN-02	AZF-60S36CICE	AC-DIN-02
AZF-60S48	AZF-60S48C	AZF-60S48ICE	AZF-60S48CICE	AZF-60S48C	AC-DIN-02	AZF-60S48CICE	AC-DIN-02

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com