

Distributed by:


Switching Regulator 0.5A, SIP Package

FEATURES

- ▶ Industrial Standard SIP-3 Package
- ▶ Pin-out compatible with LM78xx Linear Regulator
- ▶ Fully Regulated Output Voltage
- ▶ Low Ripple & Noise
- ▶ Excellent Efficiency up to 97%
- ▶ Operating Ambient Temp. Range -40°C to +90°C
- ▶ No Min. Load Requirement
- ▶ Over Temp. and Short Circuit Protection



PRODUCT OVERVIEW

The MINMAX M78AR-0.5 series is a new range of switching regulators designed as a drop-in replacement for old LM78xx linear regulators with low efficiency. The very high efficiency of these step-down converters allow an operating temperature up to 80°C at full-load without need of any heatsink. The regulators come in a package which fits in the standard TO-220 footprint of linear regulators.

The high efficiency and low stand-by power consumption of these switching regulators offer the designer a new, cost-efficient solution for many applications.

Model Selection Guide

Model Number	Input Voltage Range ⁽⁶⁾	Output Voltage	Output Current Max.	Max. capacitive Load	Efficiency (typ.)	Efficiency (typ.)
					@Min. Vin	@Max. Vin
	VDC	VDC	mA	μF	%	%
M78AR015-0.5	4.75 ~ 32	1.5	500	220	73	63
M78AR018-0.5		1.8	500	220	82	71
M78AR025-0.5		2.5	500	220	87	77
M78AR033-0.5		3.3	500	220	91	81
M78AR05-0.5	6.5 ~ 32	5	500	220	94	86
M78AR065-0.5	8 ~ 32	6.5	500	220	95	88
M78AR09-0.5	11 ~ 32	9	500	220	96	92
M78AR12-0.5	15 ~ 32	12	500	220	97	94
M78AR15-0.5	18 ~ 32	15	500	220	97	95

Input Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)		-0.3	---	34	VDC
Internal Filter Type		Capacitor			
Input Filter	All Models	Internal Capacitor			
Short Circuit Input Power		---	---	1.5	W
Input Current	@No Load	---	5	---	mA

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy		---	±2.0	±3.0	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load	1.5V to 6.5V	±0.2	±0.4	%
		9V to 15V	±0.1	±0.2	%
Load Regulation	Io=10% to 100%	1.5V to 6.5V	±0.4	±0.6	%
		9V to 15V	±0.25	±0.4	%
Minimum Load	No minimum Load Requirement				
Ripple & Noise	0-20MHz Bandwidth	1.5V to 6.5V	---	30	mV _{P-P}
		9V to 15V	---	40	mV _{P-P}
Transient Recovery Time	50% Load Step Change	---	100	---	μsec
Transient Response Deviation		---	±2	---	%
Temperature Coefficient		---	---	±0.015	%/°C
Short Circuit Protection	Continuous, Automatic Recovery				

General Specifications

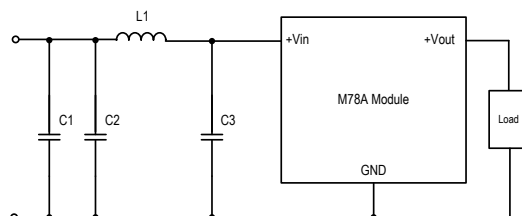
Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	None				
Switching Frequency		280	330	380	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	2,000,000			Hours

Environmental Specifications

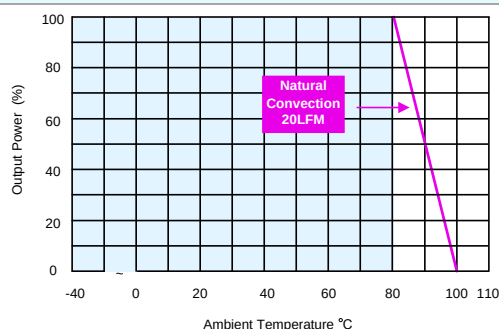
Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	---	+90	°C
Case Temperature		---	---	+100	°C
Storage Temperature		-55	---	+125	°C
Thermal Shutdown	Internal IC junction	---	160	---	°C
Humidity (non condensing)		---	---	95	% rel. H
Cooling	Natural Convection				
Lead-free reflow solder process (1.5mm from case for 10Sec.)		---	---	260	°C

EMC Specifications

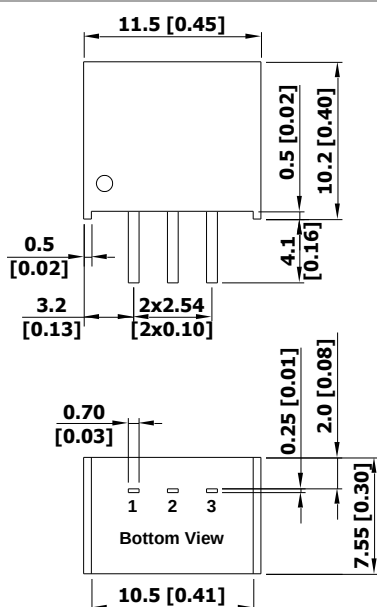
Parameter	Standards & Level		Performance
EMI	Radiation without adding any external components	EN55022, FCC part 15	Class B
	Conduction with external components		
EMS	ESD	EN61000-4-2 Air±8kV	A
	Radiated immunity	EN61000-4-3 3V/m	A
	Fast transient ₍₄₎	EN61000-4-4 ±0.5kV	A
	Conducted immunity	EN61000-4-6 3Vrms	A
	PFMF	EN61000-4-8 3A/m	A

EMI Filter meets Conducted EMI EN55022 class B; FCC part 15 level A


Class	C1	C2	C3	L1
Class A	---	4.7µF/50V 1206 MLCC	4.7µF/50V 1206 MLCC	Würth Elektronik NO. 744774033
Class B	4.7µF/50V 1206 MLCC	4.7µF/50V 1206 MLCC	4.7µF/50V 1206 MLCC	Würth Elektronik NO. 74477410

Power Derating Curve

Notes

- Specifications typical at $T_a = +25^{\circ}\text{C}$, resistive load, nominal input voltage, rated output current unless otherwise noted.
- Other input and output voltage may be available, please contact factory.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- The M78A series can meet EN61000-4-4 by adding a capacitor across the input pins. Suggested capacitor CHEMI-CON KY 330 μF /100V.
- That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- With a input capacitor 22 μF /50V for input voltage >28VDC, the input voltage allows 32VDC, max.
- Specifications are subject to change without notice.

Package Specifications
Mechanical Dimensions

Pin Connections

Pin	Function
1	+Vin
2	GND
3	+Vout

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.5$ ($X.XX \pm 0.02$)
 $X.XX \pm 0.25$ ($X.XXX \pm 0.01$)
- ▶ Pins ± 0.05 (± 0.002)

Physical Characteristics

Case Size : 11.5x7.55x10.2mm (0.45x0.30x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

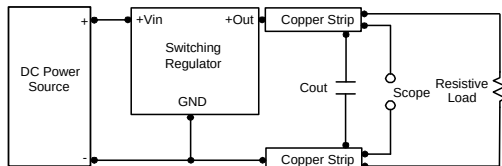
Pin Material : Alloy 42

Weight : 1.95g

Test Setup

Peak-to-Peak Output Noise Measurement Test

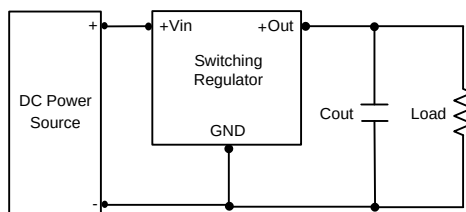
Use a C_{out} 0.47 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC/DC Converter.



Technical Notes

Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 3.3 μ F capacitors at the output.



Maximum Capacitive Load

The M78AR-0.5 series has limitation of maximum connected capacitance on the output. The power module may operate in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com