


REV	REVISION RECORD	DATE	APPROVED	NAME
△				

Cable X = 1000+/-20mm

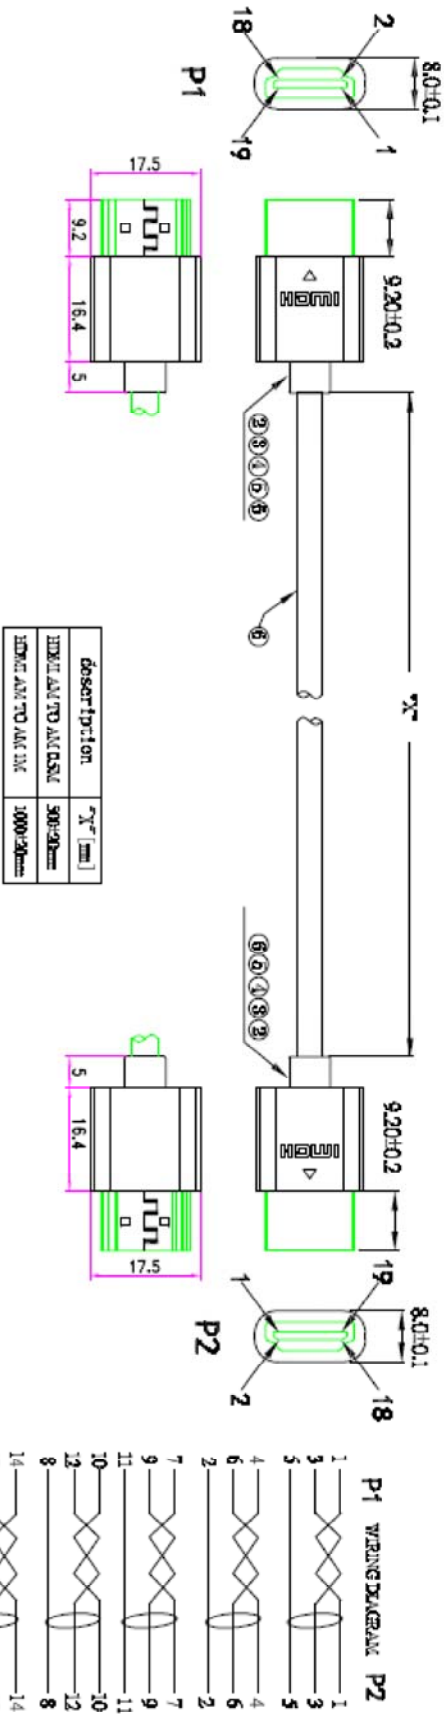


ELECTRICAL TEST:

- 1.100% OPEN SHORT MIS-WIRE TEST
 - 2.CONTACT TESTSTANCE:2 ohm Max
 - 3.INSULATION RESISTANCE:5M ohm
 - 4.AC:200V DC:300V
 - 5.2K*4K VGA TEST
- NOTE: All Materials/Processes are RoHS

6	Outer mold	PVC 45P Black	2PCS
5	Inner mold	Low density PB , Natural	2PCS
4	Cover	HDM1 AM shield cover	2PCS
3	Clamp	HDM1 AM cable clamp	2PCS
2	connector	HDM1 AM connector , contact gold plated , shield cover gold plated , color:Black	2PCS
1	Cable	HDM11 4N131AWG/0.0680*P1/D7/0.0680+AL-MV*SP131AWG C70.0680*P1/C+AD3 OD=2.02 mm PVC Black (no marking)	1PC
NO.	ITEM	Description	Qty

TOLERANCE		MATERIAL	FINISH
±0.3			
VERSION	SCALE	NO.	UNIT
01		1/1	mm
DATE	APPROVED	CHECKED	DRAWN
2018/09/25			Jones
MODEL NAME			
315-H019A10A10			
TITLE			
OUTLINE_Cable			



DigiWise International Corporation