


Mini-ITX with Intel® 8th / 9th Generation Core™ LGA1151 Socket Processor, Max. 65W TDPs, USB 3.2 Gen 2 Port x 6, USB 2.0 Port x 6, 12V DC input



Features

- 8th/9th Gen. Intel® Core™ LGA1151 Processor
- DDR4 DRAM Support, 2666MHz, Max. 64GB
- M.2 Slot (M key; NVME/SATA) x 1, M.2 Slot (E key) x 1
- USB 3.2 Gen 2 Port x 6, USB 2.0 Port x 6
- Intel® Gigabit Ethernet x 2
- SATA 6.0 Gb/s x 2
- PCI-Express [x16] (Gen3) x 1
- 12VDC input

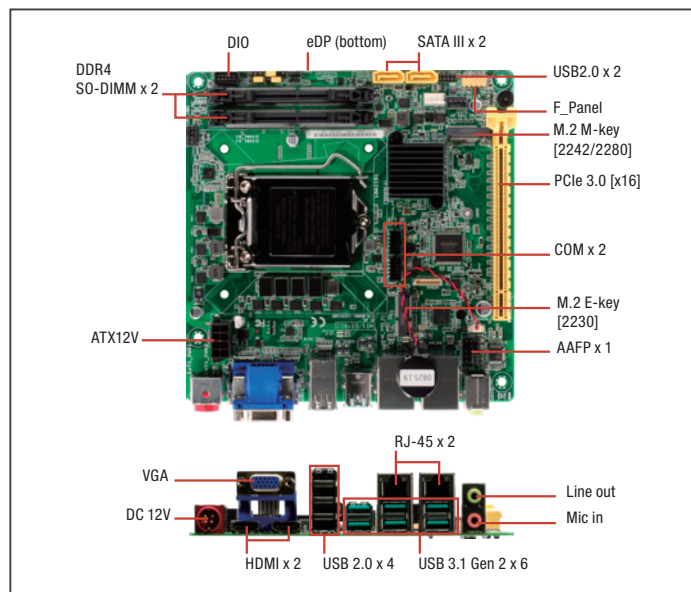

Specifications

System	
Processor	8th/9th Gen. Intel® Core™ LGA 1151 socket Processor (formerly Coffee Lake-S), Max. 65W TDPs
Chipset	Intel® Q370 Express Chipset
Memory	DDR4 2666/2400/2133 MHz SODIMM x 2, Up to 64GB, Non-ECC, Un-buffered Memory, Dual channel memory architecture
I/O Chipset	NCT6793D
Ethernet	Intel® GbE LAN i219V x 1, Intel® GbE LAN i211AT x 1
Audio	Realtek® ALC887
TPM	NPCT750AAAYX TPM2.0
Expansion Slots	PCIe3.0 [x16] x 1 M.2 E-key(22 x 30 mm) x1 for Wireless-wifi module (PCIe+USB; CNVi)
BIOS	256Mbit Flash ROM, AMI BIOS
H/W Monitor	Temperature Monitor on CPU/Chassis, Voltage Monitor on Vcore/5V/12V, Fan Monitor on CPU/Chassis
WatchDog Timer	1~255 steps by software program
Smart Fan Control	CPU Fan/Chassis Fan
Wake On LAN/ PXE	Yes (WOL/PXE)
Power State	S3, S4, S5
Graphics	
Graphics Chipset	Intel® UHD Graphics
Graphics Multi Display	HDMI x 2 + VGA + eDP
VGA	Up to 1920 x 1200 @ 60 Hz
DVI	—
HDMI	Up to 3840 x 2160 @30 Hz(HDMI 1.4b)
Display Port	—
LVDS	—
eDP	eDP UP to 4096 x 2304 @ 60Hz
Backlight Control	Support eDP
Environment & Power & ME	
Battery	Lithium battery
Power Requirement	12V DC
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% R/H, non-condensing
Certificate	CE & FCC
Form Factor	Mini-ITX: 6.7" x 6.7" (170 mm x 170 mm)
Weight	1.1 lb (0.5 Kg)
MTBF (Hours)	319,160
Rear Panel I/O Ports	
USB	USB 3.2 Gen2 x 6, USB2.0 x 4

Display I/O	VGA x 1, HDMI x 2
Audio I/O	Mic-in x 1, Line-out x 1
LAN I/O	LAN (RJ-45) port x 2
Serial Port	—
PS/2 Port	—
Others	12V DC Jack (max:192W)
Internal I/O Connectors	
Storage	SATA3.0 (6.0Gb/s) x 2 M.2 M-key (22 x 42/80mm; NVME/SATA) x 1
USB	USB 2.0 (2 x 5-pin, 2.00mm) x 1 port support additional 2 USB
Display I/O	eDP x 1
Audio I/O	AAFP x 1
Serial Port	Boxer header for COM (RS-232) x 1; RS-232/422/485 x 1
PS/2 Port	—
Parallel Port	—
DIO	Digital I/O box header x 1
FAN	4-pin CPU Fan connector x 1, 4-pin Chassis Fan connector x 1
Power	12V ATX Power Connector x 1
Others	Front Panel connector x 1 Chassis Intrusion x 1 Buzzer onboard x 1 CMOS jumper x 1 SATA Power connector x 1 SPI ROM programming header x 1 ATX/AT mode jumper x 1 eDP backlight power jumper x 1 eDP T-con IC power jumper x 1
OS	
OS Support	Windows® 10 64-bit, Linux Ubuntu 18.04.2


Packing List

- SATA Cable
- SATA Power Cable
- I/O Shield
- MIX-Q370D2

Distributed by:




Block Diagram

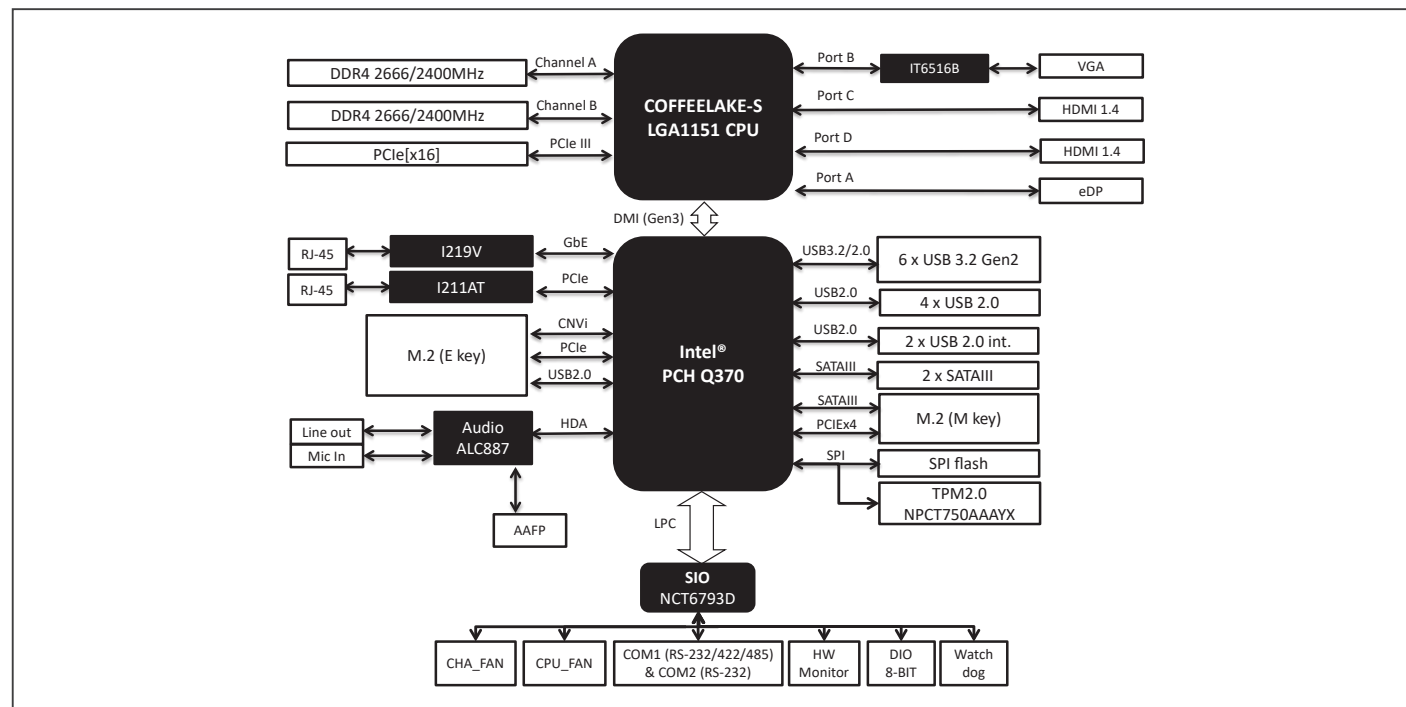

Dimension

Unit: mm

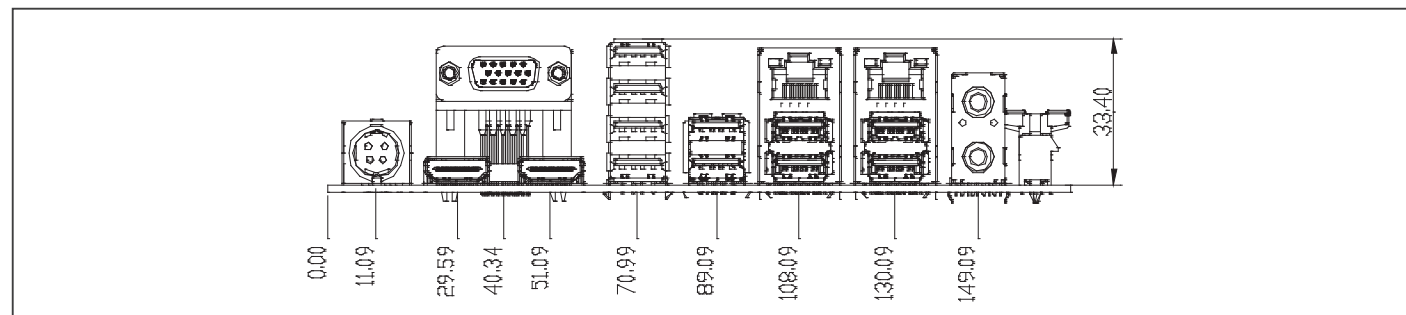

Ordering Information

Part Number	CPU	RAM	Fan/Fanless	Display	Storage	LVDS	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	TPM	Temp.
MIX-Q370D2-A10	Socket	SODIMM x 2	Fan	VGA, HDMI x 2, eDP	SATA3 x2 M.2(M-key) x 1	—	GbE x 2	USB2.0 x 6 USB3.2 Gen 2 x 6	1	1	PCIe3.0[x16] x 1 M.2(E-Key) x 1	12V DC	2.0	32°F ~140°F (0°C ~ 60°C)

Optional Accessories

Part Number	Description
1759200172	CPU Cooler (2-Ball, Screw with Retention Plate)
175921156B	CPU Cooler (2-Ball, Push-pin Type)
COOLER-65W-01	CPU Cooler, LGA 1156, 12V, 65W, 4P, Kingcooler, 0571-1463R
1709100201	USB 2.0 Cable (10P, 200MM, p=2.00mm, w/bracket)
1701100206	COM Cable (200MM, p=2.00mm)
1700100491	USB 2.0 Cable (10P, 490mm, p=2.00mm)
1255X00011	(TF)AC/DC Adapter.12V.192W.16A.FSP192-AHAN3.9NA1920100

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com