

# Lantronix EMG™ 7500

Edge Management Gateway with Centralized Management Software



 ConsoleFlow™

COMPACT COST-EFFECTIVE  
REMOTE MANAGEMENT  
A COMPLETE OUT-OF-BAND  
EDGE SOLUTION

The Lantronix® EMG™ 7500: Edge Management Gateway is the newest addition to the EMG family of edge solutions for branch offices, remote locations, retail stores where small port count, fixed configurations, and integrated cellular connectivity are ideal at a cost-effective price.

## Easy Centralized Management - ConsoleFlow™

ConsoleFlow™ is Lantronix's Software as a Service, cloud, or on-premise management platform for all deployed Lantronix edge management gateways and connected IT equipment. It offers a single pane of glass for centralized management with secure remote access, automated monitoring and zero-touch provisioning. Mobile access from any iOS or Android platform provides secure access to your IT equipment. The ConsoleFlow mobile App is available for your iOS or Android device. [ConsoleFlow™](#)

## Cost-Effective Secure Connectivity, Anywhere at Any Time


The EMG7500 boasts a smaller size than its EMG8500 sibling while still offering up to 8 management ports. The EMG7500 is excellent for customers where space and cost matter most, perfectly suited for retail, branch offices, and unmanned locations, such as ATMs and cell towers. This cost-effective EMG family member comes in a fixed configuration with internal flash memory and an integrated cellular interface. The Lantronix Connectivity Services provides global cellular data and SMS services for your EMG7500 solution, all powered by a single SIM. [Connectivity Services](#)

## Quick Recovery from Downtimes

An integrated automatic fail-over/fail-back mechanism allows users to connect to their network equipment even when the primary network connection is congested or unresponsive. The EMG7500 can fail-over to a cellular 4G/LTE connection where all global carriers are supported with services such as Private APN, VPN access, public, and private IP addressing. Network Performance Monitoring with support of IPSLA simulation traffic can ensure continuous and reliable network communication and help mitigate Lights Out scenarios.

## EMG™ 7500 Features

- Intelligent Centralized Management
- Software-defined networking
- Zero-touch provisioning deployments
- Always-on secure out-of-band access
- 4G/LTE cellular failover and failback
- Policy-based device and feature access
- Collect and store asset telemetry data
- Secure REST APIs to access data
- Automation with Python scripting
- Cisco IP SLA performance monitoring
- Data securely encrypted inflight and at rest

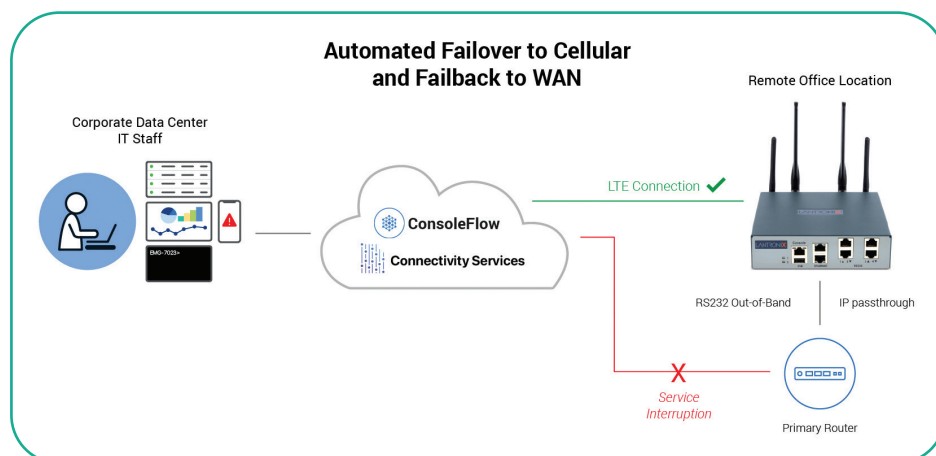

## Features and Specifications

### Device Access

- In-Band: 2 Ethernet RJ45 ports (10/100/1000Mbps), Wi-Fi (\*Optional on future models)
- Out-of-Band: Internal POTS MODEM (\*Optional on future models), internal LTE Cellular Radio

### Security and Authentication

- Enterprise-grade security
- Secure Sockets Layer (TLS v1, v1.1, v1.2, v1.3)
- Packet filtering (firewall)
- Per port user permissions
- Configurable user/group rights
- Remote authentication: LDAP/AD, RADIUS, Kerberos, TACACS+, NIS
- Local username/password
- NIST-certified implementation of AES (Advanced Encryption Standards) as specified by FIPS-197
- FIPS 140-2 compliant cryptography (Certificate #1878)

### Serial Device Port Access

- Software programmable reversible pinouts on device ports Serial RS232
- Telnet/SSH to EMG command line interface
- Telnet/SSH/RAW-TCP direct to an IP address
- HTML5 support for Java-free web terminal SSH access to console ports
- Multiple Telnet/SSH sessions
- Simultaneous user access to the same console port
- Customizable multi-level user menus
- RJ45 and/or USB device ports Serial RS232 up to 8 ports, USB type A up to 8 ports, or mix RS232 4 ports and USB 4 ports (\*Optional on certain models)
- Automatic port-initiated connections to a network host or outbound SSH connections to neighboring equipment
- Enable CLI terminal logins from any device port
- SD card and USB for port logging

### Data Capture and Notification

- Port buffering—256 KB per port
- Port logging to local files, syslog, USB thumb drive, SD card, and NFS share
- System, audit and port logging
- Event notification via email, SNMP or Syslog entry
- Character string recognition

### Management

- Quick setup and configuration web interface (TLS)
- CLI setup script
- CLI (Telnet, SSH, WebTerminal or direct console port access)
- SNMP (MIB II) —v1, v2, v3 compatible, custom MIBs
- RPM (remote power management) feature to control and monitor industry leading PDU & UPS devices
- Active user list display, port monitoring
- and timeout
- Diagnostics and port status counters
  - Performance monitoring utility
  - Packet generation utility
  - Network trace utility
- Optional digital I/O and special integration with Sensorsoft environmental sensors
- Local subnet search for other Lantronix console manager solutions
- Maximum 15 users per device port

### Additional Protocols Supported

- DHCP and BOOTP for dynamic IP address assignment
- NTP for time synchronization
- FTP, TFTP, SFTP, SCP client for file transfers
- DNS IP address name resolution
- SSH, TLS, SSL, Telnet and TCP for connections in/out of every device port, UDP, PPP with PAP/CHAP, NFS and CIFS for data storage
- StrongSwan IPsec VPN client
- RIP and RIPV2
- IPv6 Addressing supported

### Interfaces

- Front Panel, Console and Logging: 1 RJ45 Port Serial RS232, 1 USB Port Host type A
- Front Panel, Connectivity: 2 RJ45 Ports Ethernet (10/100/1000Mbps)
- Front Panel, IOs: 4 RJ45 Ports Serial RS232 300 to 921600 bps, or 4 USB Ports Host Type A
- Back Panel Logging: 1 microSD slot
- Back Panel Connectivity: LTE/4G Cellular Radio with antennas and microSIM slot, optional Wi-Fi and antennas
- Back Panel, IOs: 4 RJ45 Ports Serial RS232 300 to 921600 bps, or 4 USB Ports Host Type A

### Environmental Sensors Support

- Plug and go connectivity support for sensors and accessories used to measure/ detect temperature, humidity, power availability and dry-contact closures

### Memory

- 1/2 GB Internal NAND Flash
- 1/2 GB Internal DRAM
- External Storage: microSD slot for up to 128 GB Flash

### Power

- Desktop Power Supply shipped with unit, or external 9-30VDC
- Power Usage: 20W

### Central Management

- Compatible with the Lantronix ConsoleFlow™ central management software

### Environmental

- Temperature:
  - Operating: 0 to 50° C (32 to 122° F), 30 to 90%RH, non-condensing
  - Storage: -20 to 80° C (-4 to 176° F), 10 to 90% relative humidity, non-condensing

### Physical

- Side mounted brackets
- Dimensions (L x W x H): 163x145x43mm (6.42x5.71x1.7 in.)
- Weight: TBD maximum, depending on options

### Warranty

- 3 year limited warranty (extended warranty and support options available)

### Certifications

- Completed: FIPS 140-2, PTCRB and UL/CB
  - In progress: FCC, IC, CE, AT&T, RCM and Verizon
- \* For addition regional certifications, ask your regional Lantronix sales associate for details.

## How to Order:

### Pick a Connectivity module.

Internal LTE Cellular Radio is always available.

**Future Models:** Wi-Fi (\*Optional on certain models), or POTS MODEM (\*Optional on certain models)

If user selects 8 port I/O module, then Wi-Fi or POT MODEM option is NOT available. The configuration will have 4 I/O ports on the front and the additional 4 I/O ports on the back.

### I/O Configuration Options:

- 4 Port RS-232
- 8 Port RS232
- 4 Port RS232 + 4 Port USB



## Lantronix Contact Information:

### Americas

800.422.7055  
americas\_sales@lantronix.com  
www.lantronix.com  
NASDAQ: LTRX

### Europe

+31 (0) 76.52.3.6.74 4  
eu\_sales@lantronix.com

### Asia/Pacific/Japan

+852 3428.2338  
asiapacific\_sales@lantronix.com  
China: +86.21.6237.8868  
India: +91 994-551-2488  
Indonesia: +91 994-551-2488  
Japan: +81.8.50.1354.6201

© 2021 Lantronix, Inc. All rights reserved. Lantronix is a registered trademark of Lantronix, Inc. in the U.S. and other countries. ConsoleFlow and EMG are trademarks of Lantronix, Inc. All other trademarks are the property of their respective owners. Specifications subject to change without notice. MCB-00004, Rev. B