

Distributed by:



TFT DISPLAY SPECIFICATION



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD
華凌光電股份有限公司

WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw



SPECIFICATION

CUSTOMER : _____

MODULE NO.: **WF123BSWAYLNBO#**

APPROVED BY: (FOR CUSTOMER USE ONLY)	PCB VERSION: _____ DATA: _____
--	--

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
			葉虹蘭
ISSUED DATE: 2021/05/07			

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>



Winstar Display Co., LTD

華凌光電股份有限公司

MODLE NO :

RECORDS OF REVISION

DOC. FIRST ISSUE

VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2021/05/07		First issue



Contents

1.Module Classification Information

2.Summary

3.General Specifications

4.Absolute Maximum Ratings

5.Electrical Characteristics

6.Bit LVDS input

7.Optical Characteristics

8.Interface

9.Block Diagram

10.Reliability

11.Touch Panel Information

12.Contour Drawing

13.Other

1.Module Classification Information

W F 123 B S W A Y L N B 0 #
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬

①	Brand : WINSTAR DISPLAY CORPORATION																																																																							
②	Display Type : F→TFT Type, J→Custom TFT																																																																							
③	Display Size : 12.3” TFT																																																																							
④	Model serials no.																																																																							
⑤	Backlight Type :	F→CCFL, White S→LED, High Light White						T→LED, White Z→Nichia LED, White																																																																
⑥	LCD Polarize Type/ Temperature range/ Gray Scale Inversion Direction	A→Transmissive, N.T, IPS TFT C→Transmissive, N. T, 6:00 ; F→Transmissive, N.T,12:00 ; I→Transmissive, W. T, 6:00 K→Transflective, W.T,12:00 L→Transmissive, W.T,12:00 N→Transmissive, Super W.T, 6:00						Q→Transmissive, Super W.T, 12:00 R→Transmissive, Super W.T, O-TFT V→Transmissive, Super W.T, VA TFT W→Transmissive, Super W.T, IPS TFT X→Transmissive, W.T, VA TFT Y→Transmissive, W.T, IPS TFT Z→Transmissive, W.T, O-TFT																																																																
⑦	A : TFT LCD B : TFT+SCREW HOLES+CONTROL BOARD C : TFT+ SCREW HOLES +A/D BOARD D : TFT+ SCREW HOLES +A/D BOARD+CONTROL BOARD E : TFT+ SCREW HOLES +POWER BOARD						F : TFT+CONTROL BOARD G : TFT+ SCREW HOLES H : TFT+D/V BOARD I : TFT+ SCREW HOLES +D/V BOARD J : TFT+POWER BD																																																																	
⑧	Resolution: <table><tr><td>A</td><td>128160</td><td>B</td><td>320234</td><td>C</td><td>320240</td><td>D</td><td>480234</td><td>E</td><td>480272</td><td>F</td><td>640480</td></tr><tr><td>G</td><td>800480</td><td>H</td><td>1024600</td><td>I</td><td>320480</td><td>J</td><td>240320</td><td>K</td><td>800600</td><td>L</td><td>240400</td></tr><tr><td>M</td><td>1024768</td><td>N</td><td>128128</td><td>P</td><td>1280800</td><td>Q</td><td>480800</td><td>R</td><td>640320</td><td>S</td><td>480128</td></tr><tr><td>T</td><td>800320</td><td>U</td><td>8001280</td><td>V</td><td>176220</td><td>W</td><td>1280398</td><td>X</td><td>1024250</td><td>Y</td><td>1920720</td></tr><tr><td>Z</td><td>800200</td><td>2</td><td>1024324</td><td>3</td><td>7201280</td><td>4</td><td>19201200</td><td>5</td><td>1366768</td><td>6</td><td>1280320</td></tr></table>												A	128160	B	320234	C	320240	D	480234	E	480272	F	640480	G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400	M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128	T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720	Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320
A	128160	B	320234	C	320240	D	480234	E	480272	F	640480																																																													
G	800480	H	1024600	I	320480	J	240320	K	800600	L	240400																																																													
M	1024768	N	128128	P	1280800	Q	480800	R	640320	S	480128																																																													
T	800320	U	8001280	V	176220	W	1280398	X	1024250	Y	1920720																																																													
Z	800200	2	1024324	3	7201280	4	19201200	5	1366768	6	1280320																																																													
⑨	D: Digital L : LVDS M:MIPI																																																																							
⑩	Interface: <table><tr><td>N</td><td>Without control board</td><td>A</td><td>8Bit</td><td>B</td><td>16Bit</td><td>H</td><td>HDMI</td></tr><tr><td>I</td><td>I2C Interface</td><td>R</td><td>RS232</td><td>S</td><td>SPI Interface</td><td>U</td><td>USB</td></tr></table>												N	Without control board	A	8Bit	B	16Bit	H	HDMI	I	I2C Interface	R	RS232	S	SPI Interface	U	USB																																												
N	Without control board	A	8Bit	B	16Bit	H	HDMI																																																																	
I	I2C Interface	R	RS232	S	SPI Interface	U	USB																																																																	
⑪	TS: <table><tr><td>N</td><td>Without TS</td><td>T</td><td>Resistive touch panel</td><td>C</td><td>Capacitive touch panel (G-F-F)</td></tr><tr><td>G</td><td colspan="3">Capacitive touch panel (G-G)</td><td>C1</td><td>Capacitive touch panel (G-F-F)+OCA</td></tr><tr><td>C2</td><td colspan="3">Capacitive touch panel (G-F-F)+OCR</td><td>G1</td><td>Capacitive touch panel (G-G)+OCA</td></tr><tr><td>G2</td><td colspan="3">Capacitive touch panel (G-G)+OCR</td><td>B</td><td>CTP+GG+USB</td></tr></table>												N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)	G	Capacitive touch panel (G-G)			C1	Capacitive touch panel (G-F-F)+OCA	C2	Capacitive touch panel (G-F-F)+OCR			G1	Capacitive touch panel (G-G)+OCA	G2	Capacitive touch panel (G-G)+OCR			B	CTP+GG+USB																																				
N	Without TS	T	Resistive touch panel	C	Capacitive touch panel (G-F-F)																																																																			
G	Capacitive touch panel (G-G)			C1	Capacitive touch panel (G-F-F)+OCA																																																																			
C2	Capacitive touch panel (G-F-F)+OCR			G1	Capacitive touch panel (G-G)+OCA																																																																			
G2	Capacitive touch panel (G-G)+OCR			B	CTP+GG+USB																																																																			
⑫	Version: X:Raspberry pi																																																																							
⑬	Special Code	#:Fit in with ROHS directive regulations																																																																						

2.Summary

TFT 12.3 is a color active matrix thin film transistor (TFT) liquid crystal display (LCD) that uses amorphous silicon TFT as a switching device. This model is composed of a TFT LCD panel, a driving circuit and a back light system. This TFT LCD has a 12.28" (8:3) inch diagonally measured active display area with 5760 x 720 dot (1920 horizontal by 720 vertical pixel) resolution.



3.General Specifications

Item	Dimension	Unit
Size	12.3	inch
Pixel Number	1920 RGB (H) x 720(V)	pixel
Module dimension	364.0(H) x 175.0 (V) x 10.48	mm
Active Area	292.032(H) x 109.512(V)	mm
Pixel Pitch	0.1521(H) x 0.1521 (V)	mm
LCD type	TFT, Normally Black, Transmissive	
Viewing Angle	85/85/85/85	
Backlight Type	LED ,Normally White	
TFT Interface	2ch-LVDS	
CTP IC	ILI2511 or equivalent	
CTP Interface	USB (I2C available)	
CTP FW Version	V6.0.0.0.0.0.3	
With /Without TP	With CTP	
Surface	Glare	

*Color tone slight changed by temperature and driving voltage.

4. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+85	°C
Storage Temperature	TST	-40	—	+85	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above

1. Temp. $\leq 65^{\circ}\text{C}$, 90% RH MAX. Temp. $> 65^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 65°C




5. Electrical Characteristics

5.1. TFT LCD Module

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	VCC	3	3.3	3.6	V	
Input signal voltage	ViH	VCC *0.7	-	VCC	V	
	ViL	0	-	VCC *0.3	V	
Current of power supply	ICC	-	-	500	mA	VCC =3.3V
Inrush current	IrUSH	-	-	2.0	A	Note*
Supply CTP(USB)	USB_VDD 5V	4.75	5.0	5.25	V	USB Type
	I USB_VDD	-	90	135	mA	
Supply CTP(I2C)	VDDT 3.3	3.15	3.3	3.45	V	I2C Type
	I_VDDT	-	90	135	mA	

Note* : Inrush current test circuit and rising time setting (power on)

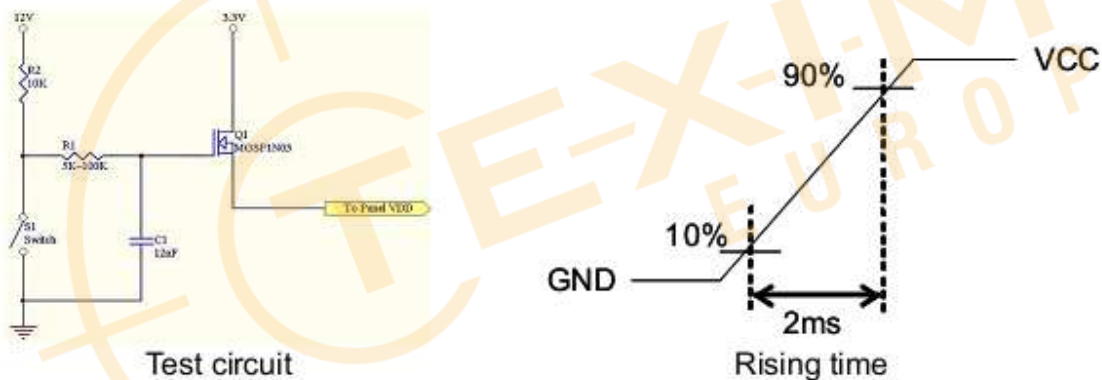

5.2. Switching Characteristics for LVDS Receiver

Item	Symbol	Min.	Typ.	Max.	Unit	Conditions
Differential Input High Threshold	Vth	100	—	300	mV	V _{CM} =1.2V
Differential Input Low Threshold	Vtl	-300	—	-100	mV	
Input Current Differential input Voltage	I _{IN} V _{ID}	-10	—	+10	uA	
		0.2	—	0.6	V	
Common Mode Voltage Offset	V _{CM}	1	1.2	1.7-(V _{ID} /2)	V	

5.3. Backlight Unit


Parameter	Symbol	Min	Typ	Max	Units	Condition
LED Current	IF	--	280	--	mA	Ta=25°C
LED Voltage	VF	--	--	37.4	Volt	Ta=25°C
LED Life-Time	N/A	30,000	--	--	Hour	Ta=25°C IF=70mA Note (2)

Note (1) LED life time (Hr) can be defined as the time in which it continues to operate under the condition: Ta=25±3 °C, typical IL value indicated in the above table until the brightness becomes less than 50%.

Note (2) The "LED life time" is defined as the module brightness decrease to 50% original brightness at Ta=25°C and IL= 280 mA. The LED lifetime could be decreased if operating IL is larger than 300 mA. The constant current driving method is suggested.

Note (3) LED Light Bar Circuit 11S4P =44pcs LED


Note (4) LED temperature current curve, The temperature at 60 degrees before the output 70mA / CH, 60 degrees to 80 degrees when the linear drop to 35mA.

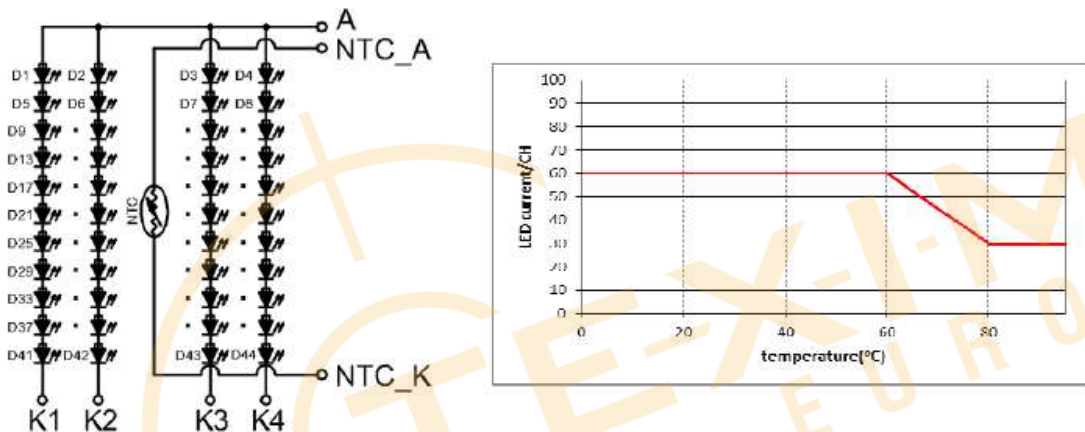

6.Bit LVDS input

6.1. Bit LVDS input

8Bit LVDS input

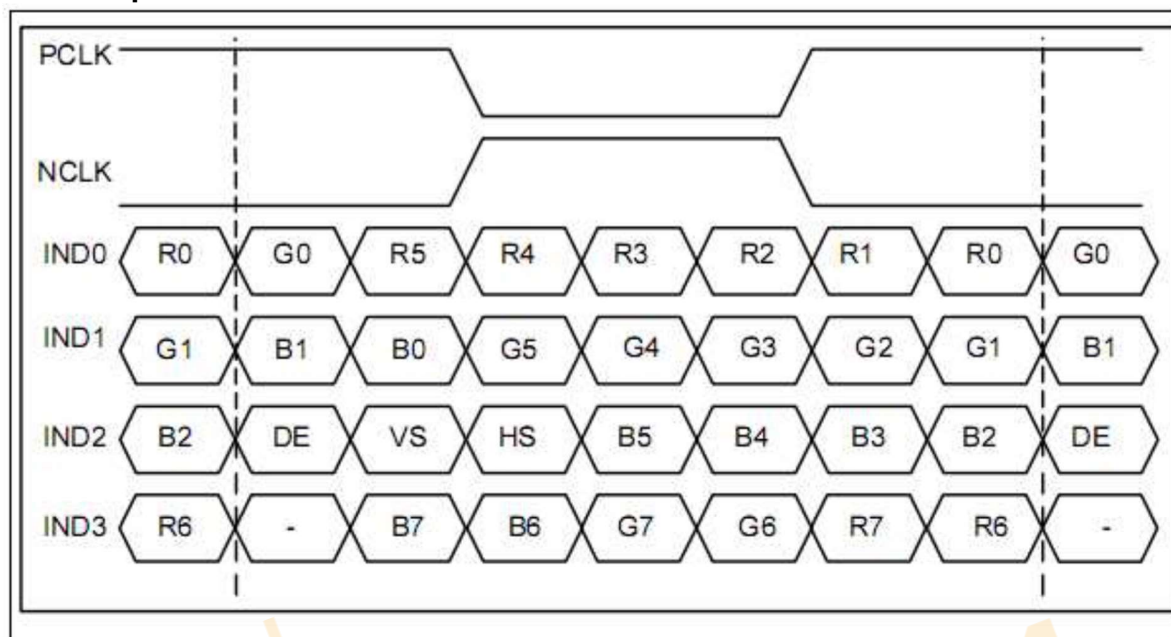


6.2. Interface Timing (DE mode)


Interface Timing (DE mode) Two Port LVDS Timing.(1920xRGBx720)					
Item	Symbol	Min.	Typ.	Max.	Unit
Frame Rate	FR	55	60	65	Hz
Frame Period	T _v	730	792	864	line
Vertical Display Time	T _{vd}	720	720	720	line
Vertical Blanking Time	T _{vb}	10	72	144	line
1 Line Scanning Time	T _h	984	992	1104	clock
Horizontal Display Time	T _{hd}	960	960	960	clock
Horizontal Blanking Time	T _{hb}	24	32	144	clock
Clock Rate	F _{CLK}	45	47.5	50	MHz

Timing Diagram of Interface Signal (DE mode)

(1) Vertical input timing

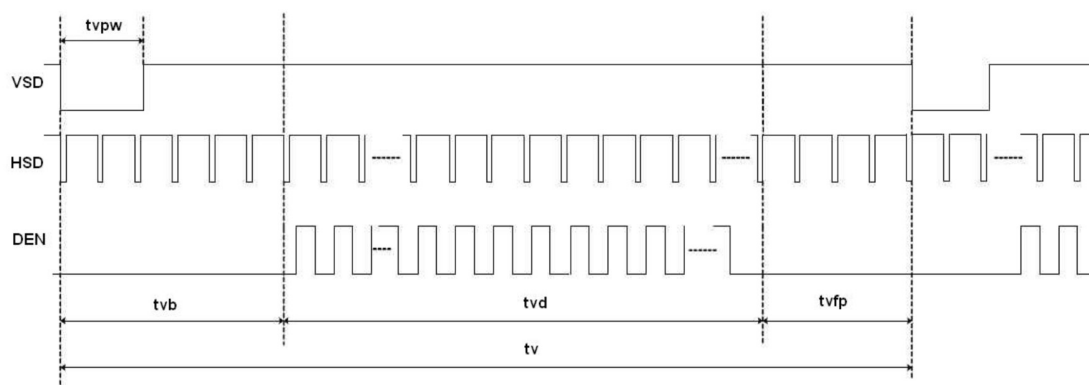


(2) Horizontal Vertical input timing

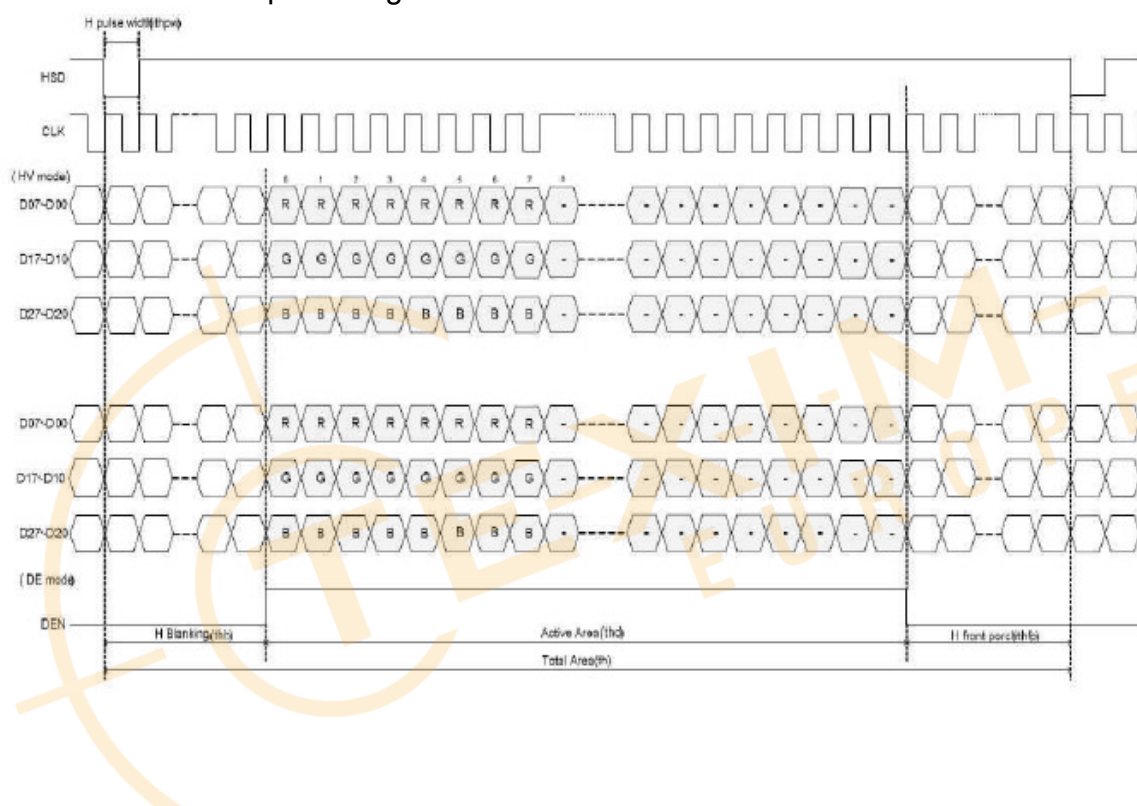


6.3. Power On / Off Sequence

Power ON

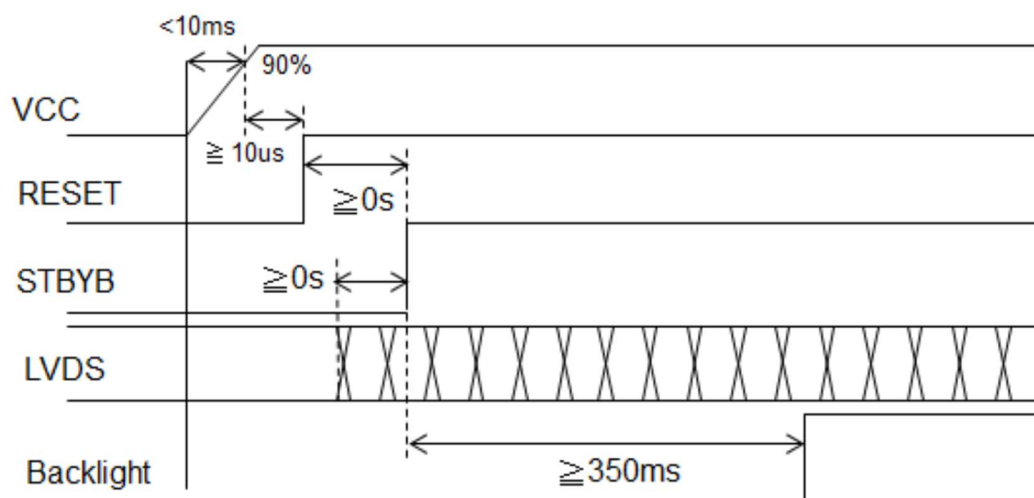

Power OFF

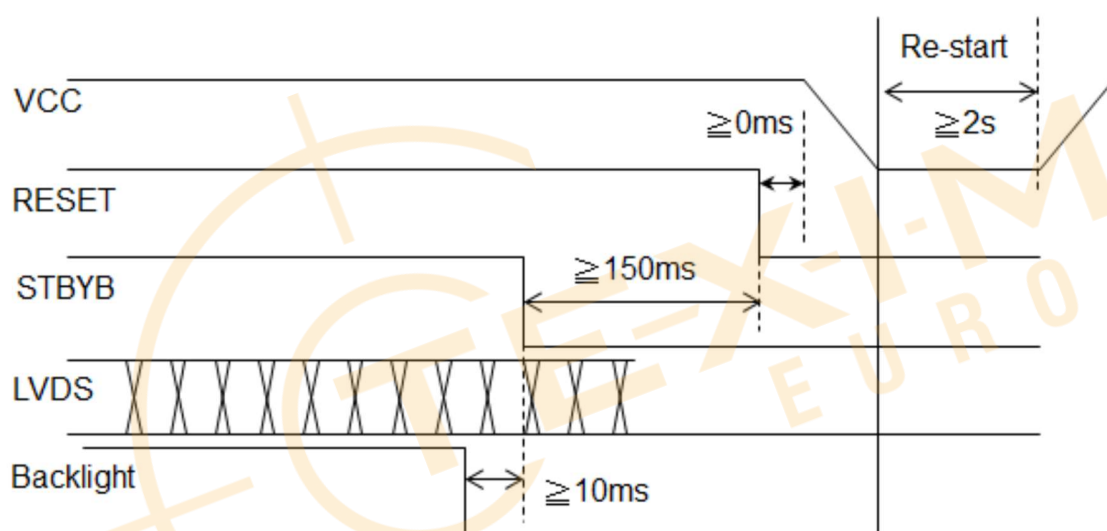

7.Optical Characteristics

Item		Symbol	Condition.	Min	Typ.	Max.	Unit	Remark
Response time		Tr	$\theta=0^{\circ}$ 、 $\Phi=0^{\circ}$	—	—	14	.ms	Note 3
		Tf		—	—	16	.ms	
Contrast ratio		CR	At optimized viewing angle	900	1100	-	-	Note 4
Color Chromaticity	White	Wx	$\theta=0^{\circ}$ 、 $\Phi=0$	0.246	0.296	0.346		Note 2,6,7
		Wy		0.274	0.324	0.374		
Viewing angle	Hor.	ΘR	$CR\geq 10$	80	85	-	Deg.	Note 1
		ΘL		80	85	-		
	Ver.	ΦT		80	85	-		
		ΦB		80	85	-		
Brightness		-	-	500	650	-	cd/m ²	Center of display
Uniformity		(U)	-	70	80-	-	%	Note 5

Note 1:

1.1 Definition of viewing angle range

1.2 Measuring surrounding : dark room

1.3 LED current IL : 280mA

1.4 Ambient temperature : 25±2℃

1.5 15min. warm-up time.

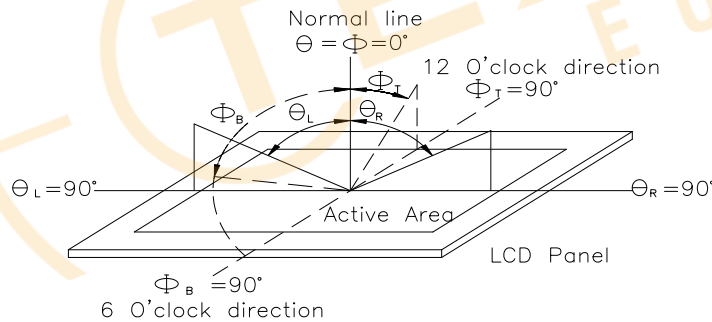


Fig.7.1. Definition of viewing angle

Note 2: Test equipment setup:

After stabilizing and leaving the panel alone at a driven temperature for 10 minutes, the measurement should be executed. Measurement should be executed in a stable, windless, and dark room. Optical specifications are measured by Topcon BM-7 or BM-5 luminance meter 1.0° field of view at a distance of 50cm and normal direction.


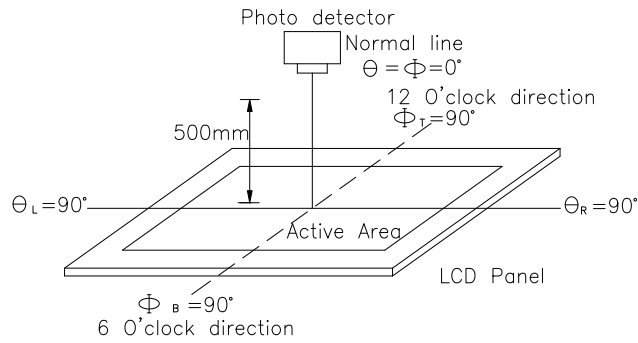


Fig. 7.2. Optical measurement system setup

Note 3: Definition of Response time:

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time, T_r , is the time between photo detector output intensity changed from 90% to 10%. And fall time, T_f , is the time between photo detector output intensity changed from 10% to 90%

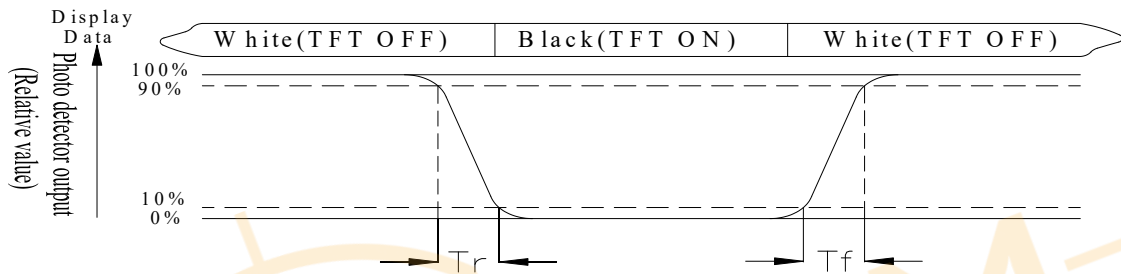

Note 4: Definition of contrast ratio:

The contrast ratio is defined as the following expression.

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance measured when LCD on the "White" state}}{\text{Luminance measured when LCD on the "Black" state}}$$

Note 5: Definition of Luminance Uniformity

Active area is divided into 9 measuring areas (reference the picture in below). Every measuring point is placed at the center of each measuring area.

$$\text{Luminance Uniformity (U)} = \text{Lmin/Lmax} \times 100\%$$

L = Active area length

W = Active area width

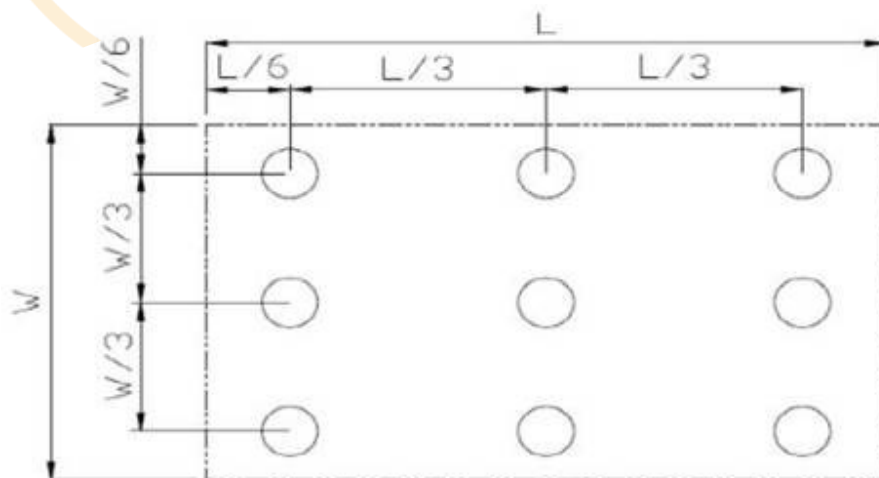


Fig7.3. Definition of uniformity

Note 6: Definition of color chromaticity (CIE 1931)
Color coordinates measured at the center point of LCD

Note 7: Measured at the center area of the panel when all the input terminals of LCD panel are electrically opened.



8.Interface

8.1. TFT LCD MODULE

FPC connector is used for electronics interface.

AORORA F31L-1A7H1-21050 , 50PIN

Pin no.	Symbol	Function
1	GND	Ground
2	NC	No connector
3	VCC	Digital Power
4	VCC	Digital Power
5	GND	Panel Power
6	GND	Panel Power
7	NC	No connector
8	NC	No connector
9	GND	Ground
10	ORXIN0-	Odd pixel negative LVDS differential clock input
11	ORXIN0+	Odd pixel positive LVDS differential clock input
12	ORXIN1-	Odd pixel negative LVDS differential clock input
13	ORXIN1+	Odd pixel positive LVDS differential clock input
14	ORXIN2-	Odd pixel negative LVDS differential clock input
15	ORXIN2+	Odd pixel positive LVDS differential clock input
16	ORXCLKIN-	Odd pixel negative LVDS differential clock input
17	ORXCLKIN+	Odd pixel positive LVDS differential clock input
18	ORXIN3-	Odd pixel negative LVDS differential clock input
19	ORXIN3+	Odd pixel positive LVDS differential clock input
20	ERXIN0-	Even pixel negative LVDS differential clock input
21	ERXIN0+	Even pixel positive LVDS differential clock input
22	ERXIN1-	Even pixel negative LVDS differential clock input
23	ERXIN1+	Even pixel positive LVDS differential clock input
24	ERXIN2-	Even pixel negative LVDS differential clock input
25	ERXIN2+	Even pixel positive LVDS differential clock input
26	ERXCLKIN-	Even pixel negative LVDS differential clock input
27	ERXCLKIN+	Even pixel positive LVDS differential clock input
28	ERXIN3-	Even pixel negative LVDS differential clock input
29	ERXIN3+	Even pixel positive LVDS differential clock input
30	GND	Ground

31	NC	No connector
32	RESETB	Global reset pin, active low.
33	STBYB	Standby mode, active low.
34	CA3	Output signal to indicate self protection mode, when DE,HS,VS,DCLK, any of these signals is missing, it will become High. If using this pin, CA3 need to pulled low by an resistor,else , let it floating.
35	SCL	Serial interface clock input. (User folating)
36	SDA	Serial interface data input/output.(User folating)
37	CSB	Serial interface chip enable.(User folating)
38	GND	Power Ground
39	GND	Power Ground
40	NC	No connector
41	LEDA	LED power (Anode)
42	LEDA	LED power (Anode)
43	LEDA	LED power (Anode)
44	NC	No connector
45	LEDK1	Cathode 1
46	LEDK2	Cathode 2
47	LEDK3	Cathode 3
48	LEDK4	Cathode 4
49	NTC_A	NTC_Anode
50	NTC_K	NTC_Cathode

8.2. CTP PIN Definition


Pin	Symbol	Function	Remark
1	USB_VSS	System ground	
2	USB_VDD 5V	Power supply	
3	USB_D+	Data +	
4	USB_D-	Data -	
5	VSS	System ground	
6	SDA	I2C data input and output	
7	SCL	I2C clock input	
8	RST	External Reset, Low is active	
9	INT	External interrupt to the host	
10	VDDT 3.3	Power supply	

Note: Interface can support both USB and I2C,USB is main function




9. Block Diagram

9.1. TFT LCD Module:

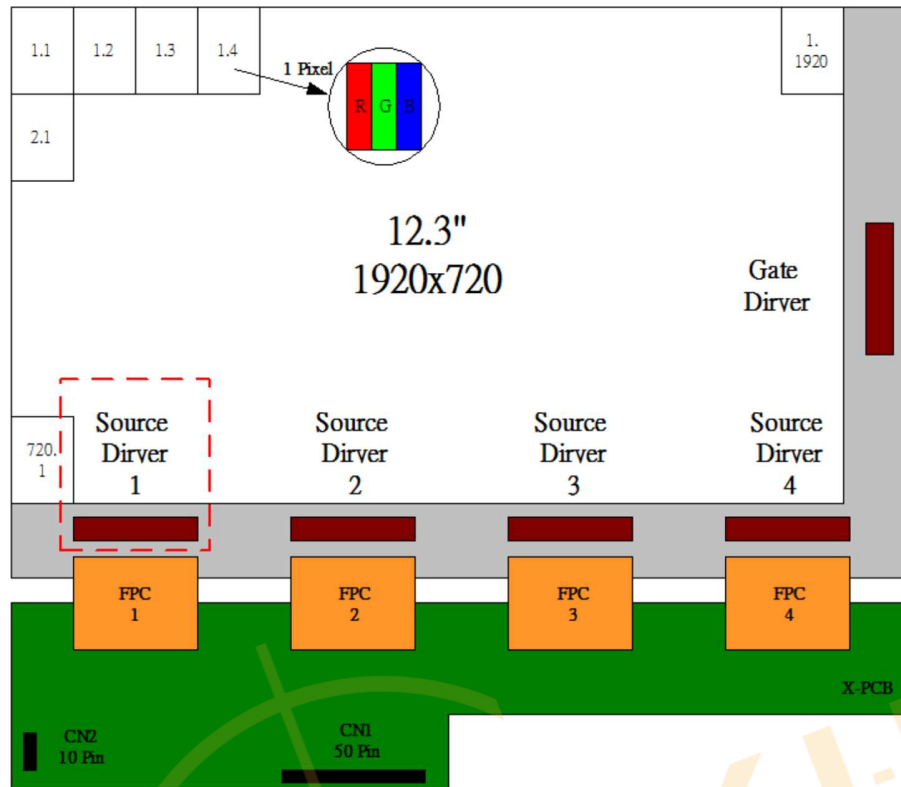

9.2. Pixel Format

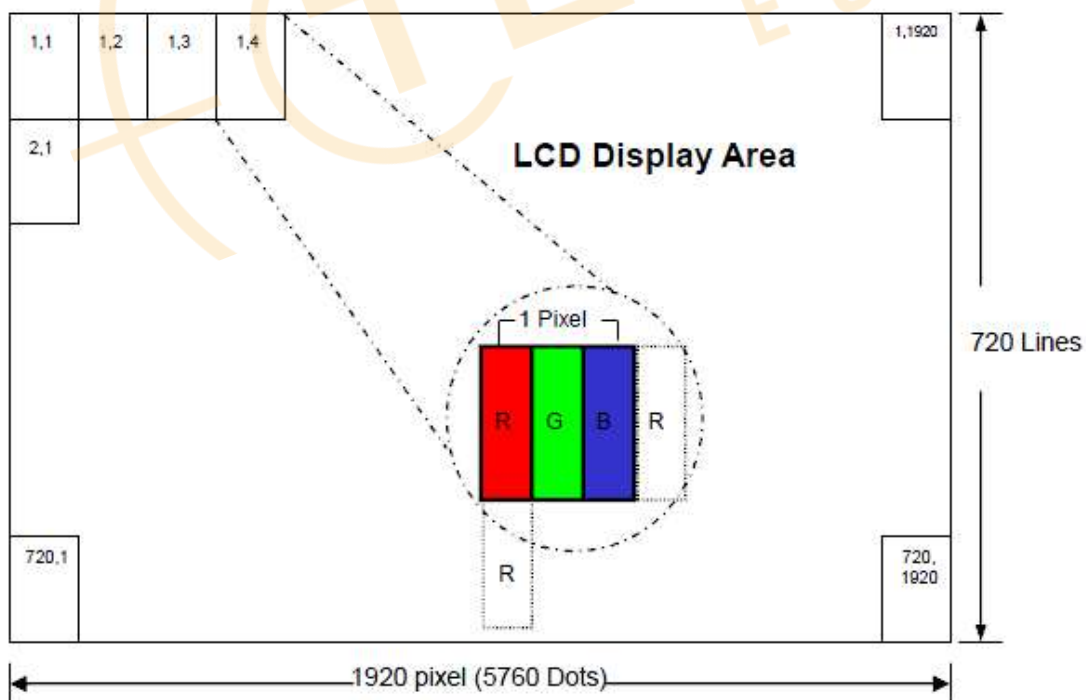


9.3. Relationship Between Displayed Color and Input

	Display	MSB								LSB								MSB								LSB								Gray scale Level
		R7	R6	R5	R4	R3	R2	R1	R0	G7	G6	G5	G4	G3	G2	G1	G0	B7	B6	B5	B4	B3	B2	B1	B0									
Basic color	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-		
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-		
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-		
	Light Blue	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-		
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-		
	Purple	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-		
	Yellow	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	-		
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	-		
Gray scale of Red	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0		
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1		
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2		
																																		L3...L251
		H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252		
		H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253		
		H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254		
	Red	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Red L255		
Gray scale of Green	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0		
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1		
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2		
																																		L3...L251
		L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L252		
		L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L253		
		L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L254		
	Green	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	Green L255		
Gray scale of Blue	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0		
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1		
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2		
																																		L3...L251
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L252		
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	H	L	L	L	L	L	L	L253		
		L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L254		
	Blue	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	Blue L255		
Gray scale of White & Black	Black	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L0		
	Dark ↑ ↓ Light	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L1		
		L	L	L	L	L	L	H	L	L	L	L	L	L	L	H	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L	L2		
																																		L3...L251
		H	H	H	H	H	H	L	L	H	H	H	H	H	H	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L252		
		H	H	H	H	H	H	L	H	H	H	H	H	H	L	H	H	H	H	H	H	H	L	H	L	L	L	L	L	L	L	L253		
		H	H	H	H	H	H	L	L	H	H	H	H	H	L	L	H	H	H	H	H	H	L	L	L	L	L	L	L	L	L	L254		
	White	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	H	White L255		

10. Reliability

Content of Reliability Test (Super Wide temperature, -30°C~85°C)

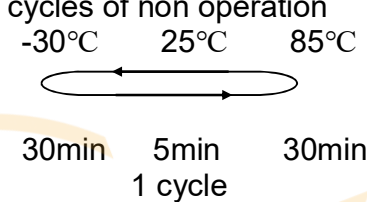Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	85°C 240hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-40°C 240hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	85°C 240hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-30°C 240hrs	1
High Temperature/Humidity storage	The module should be allowed to stand at 65°C, 90%RH max	65°C, 90%RH 240hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 20 cycles of non operation  -30°C 25°C 85°C 30min 5min 30min 1 cycle	-30°C/85°C 20 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	1. Random: 1.04G, 5~500Hz, XYZ, 30min/each direction 2. Sine: Freq. 8~33.3Hz, Stoke: 1.3mm Sweep: 2.9G, 33.3~400Hz X/Z: 2hrs, Y: 4hrs	3
Static electricity test	Endurance test applying the electric stress to the terminal.	±200V, 200pF(0Ω) 1 time/connector	—


Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.



[illegible]

12. Contour Drawing

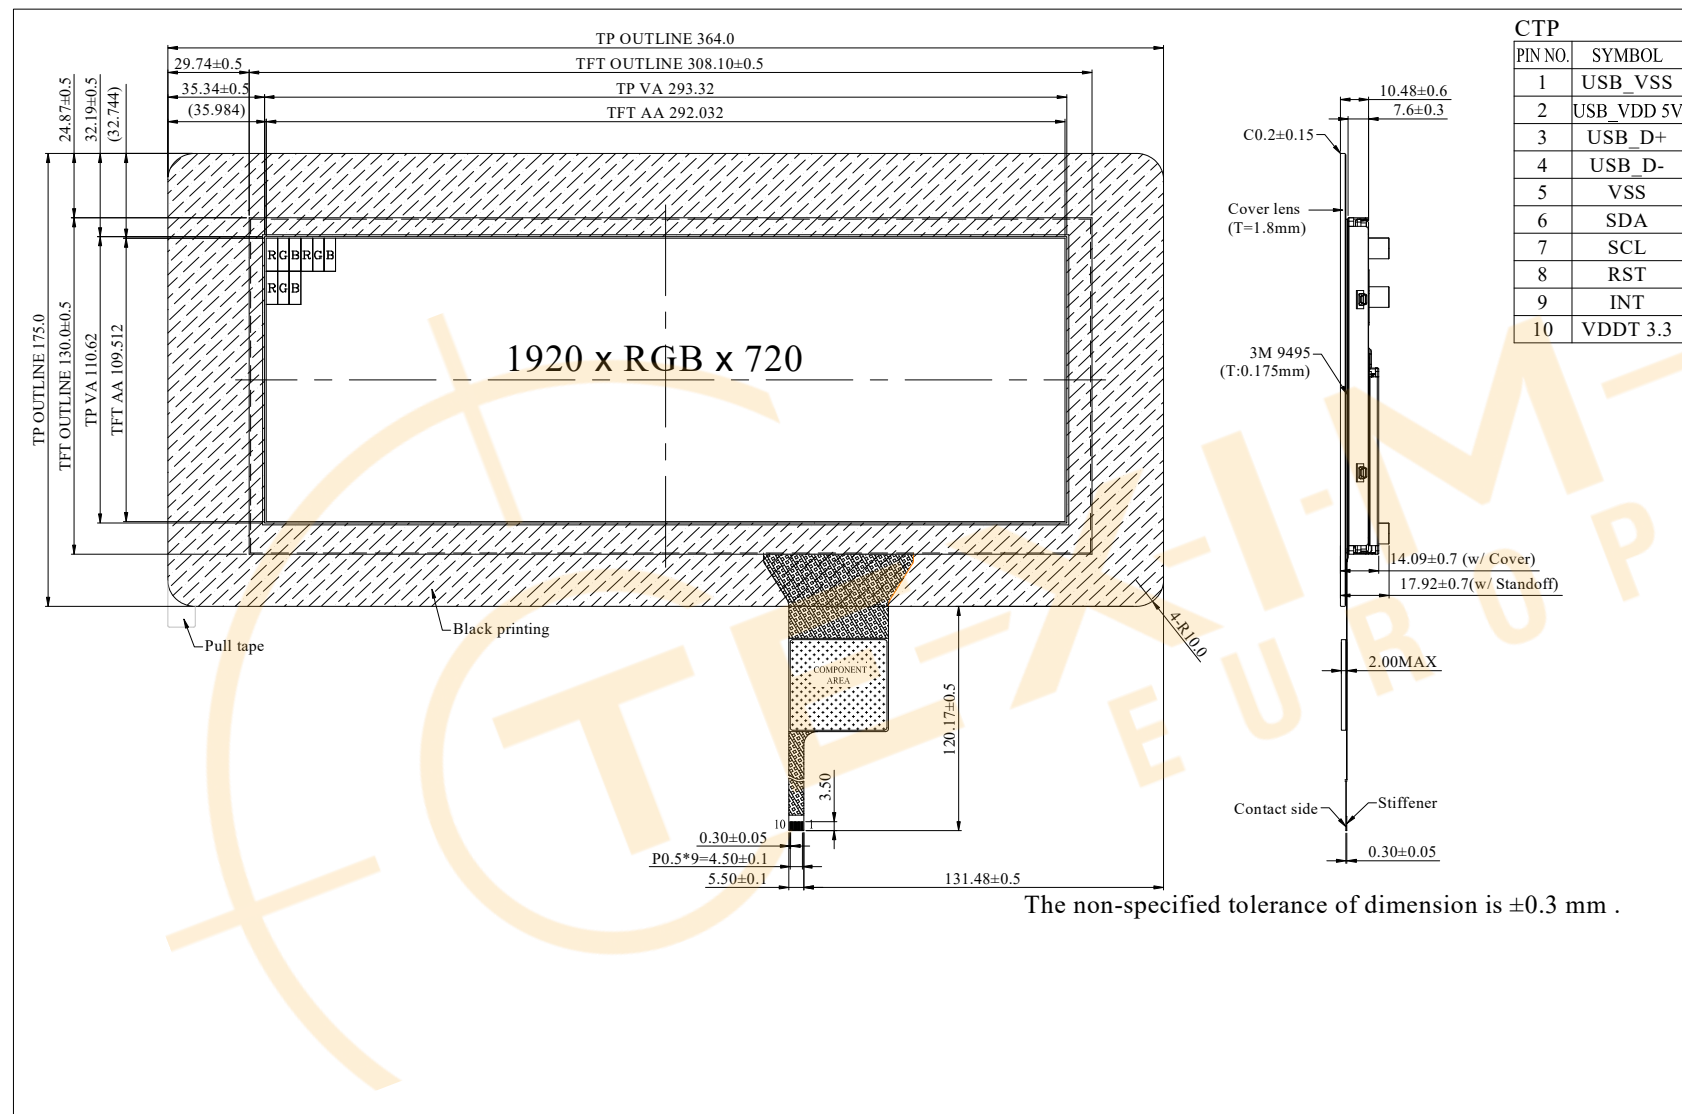


CN1(F31L-1A7H1-21050)

PIN NO	SYMBOL	PIN NO	SYMBOL
1	GND	26	ERXCLKIN-
2	NC	27	ERXCLKIN+
3	VCC	28	ERXIN3-
4	VCC	29	ERXIN3+
5	GND	30	GND
6	GND	31	NC
7	NC	32	RESET
8	NC	33	STBYB
9	GND	34	CA3
10	ORXIN0-	35	SCL
11	ORXIN0+	36	SDA
12	ORXIN1-	37	CSB
13	ORXIN1+	38	GND
14	ORXIN2-	39	GND
15	ORXIN2+	40	NC
16	ORXCLKIN-	41	LEDA
17	ORXCLKIN+	42	LEDA
18	ORXIN3-	43	LEDA
19	ORXIN3+	44	NC
20	ERXIN0-	45	LEDK1
21	ERXIN0+	46	LEDK2
22	ERXIN1-	47	LEDK3
23	ERXIN1+	48	LEDK4
24	ERXIN2-	49	NTC_A
25	ERXIN2+	50	NTC_K

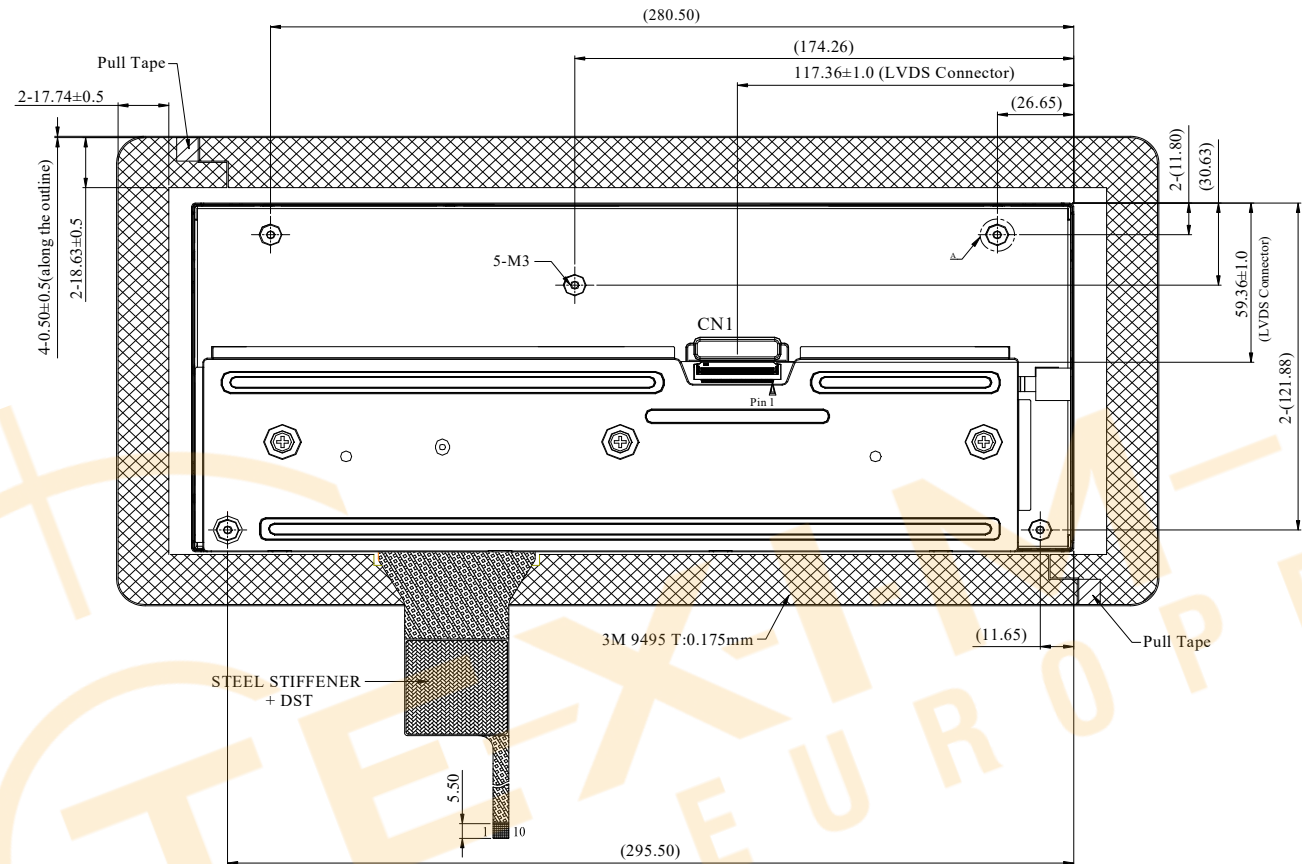

F31L-1A7H1-21050
SCALE 2/1



DETAIL A
SCALE 2:1
TOTAL 5

SECTION A-A
SCALE 2:1
TOTAL 5

The non-specified tolerance of dimension is ± 0.3 mm .



winstar

LCM Sample Estimate Feedback Sheet

Module Number : _____

Page: 1

1、Panel Specification :

- | | | |
|----------------------------|-------------------------------|-------------------------------------|
| 1. Panel Type : | ☐ Pass | ☐ NG , _____ |
| 2. View Direction : | ☐ Pass | ☐ NG , _____ |
| 3. Numbers of Dots : | ☐ Pass | ☐ NG , _____ |
| 4. View Area : | ☐ Pass | ☐ NG , _____ |
| 5. Active Area : | ☐ Pass | ☐ NG , _____ |
| 6. Operating Temperature : | ☐ Pass | ☐ NG , _____ |
| 7. Storage Temperature : | ☐ Pass | ☐ NG , _____ |
| 8. Others : | _____ | |

2、Mechanical

- | | | |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. PCB Size : | ☐ Pass | ☐ NG , _____ |
| 2. Frame Size : | ☐ Pass | ☐ NG , _____ |
| 3. Material of Frame : | ☐ Pass | ☐ NG , _____ |
| 4. Connector Position : | ☐ Pass | ☐ NG , _____ |
| 5. Fix Hole Position : | ☐ Pass | ☐ NG , _____ |
| 6. Backlight Position : | ☐ Pass | ☐ NG , _____ |
| 7. Thickness of PCB : | ☐ Pass | ☐ NG , _____ |
| 8. Height of Frame to PCB : | ☐ Pass | ☐ NG , _____ |
| 9. Height of Module : | ☐ Pass | ☐ NG , _____ |
| 10. Others : | ☐ Pass | ☐ NG , _____ |

3、Relative Hole Size :

- | | | |
|-----------------------------|-------------------------------|-------------------------------------|
| 1. Pitch of Connector : | ☐ Pass | ☐ NG , _____ |
| 2. Hole size of Connector : | ☐ Pass | ☐ NG , _____ |
| 3. Mounting Hole size : | ☐ Pass | ☐ NG , _____ |
| 4. Mounting Hole Type : | ☐ Pass | ☐ NG , _____ |
| 5. Others : | ☐ Pass | ☐ NG , _____ |

4、Backlight Specification :

- | | | |
|--|-------------------------------|-------------------------------------|
| 1. B/L Type : | ☐ Pass | ☐ NG , _____ |
| 2. B/L Color : | ☐ Pass | ☐ NG , _____ |
| 3. B/L Driving Voltage (Reference for LED Temperature) : | ☐ Pass | ☐ NG , _____ |
| 4. B/L Driving Current : | ☐ Pass | ☐ NG , _____ |
| 5. Brightness of B/L : | ☐ Pass | ☐ NG , _____ |
| 6. B/L Solder Method : | ☐ Pass | ☐ NG , _____ |
| 7. Others : | ☐ Pass | ☐ NG , _____ |

>> Go to page 2 <<



Winstar Module Number : _____

Page: 2

5、Electronic Characteristics of Module :

- | | | |
|------------------------------|-------------------------------|-------------------------------------|
| 1. Input Voltage : | ☐ Pass | ☐ NG , _____ |
| 2. Supply Current : | ☐ Pass | ☐ NG , _____ |
| 3. Driving Voltage for LCD : | ☐ Pass | ☐ NG , _____ |
| 4. Contrast for LCD : | ☐ Pass | ☐ NG , _____ |
| 5. B/L Driving Method : | ☐ Pass | ☐ NG , _____ |
| 6. Negative Voltage Output : | ☐ Pass | ☐ NG , _____ |
| 7. Interface Function : | ☐ Pass | ☐ NG , _____ |
| 8. LCD Uniformity : | ☐ Pass | ☐ NG , _____ |
| 9. ESD test : | ☐ Pass | ☐ NG , _____ |
| 10. Others : | ☐ Pass | ☐ NG , _____ |

6、Summary :

Sales signature : _____

Customer Signature : _____

Date : / /

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 971 3293
F: +39 (0)39 971 3293
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com