


Datasheet

M.2 (P80) 3TE6 B+M Key series

- PCIe Gen. III x2, NVMe 1.3
- DRAM-less Solution
- Less Controller Heat
- Anti-Vibration mechanical design
- Hybrid Write Mode
- LDPC ECC engine supported.
- iPowerGuard Protection

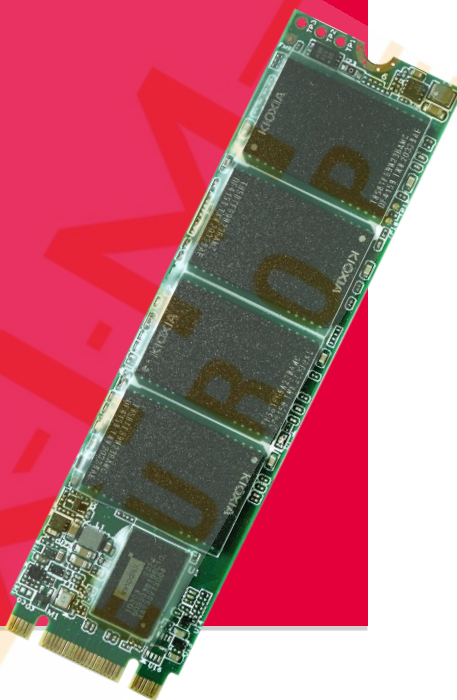

Introduction

Innodisk M.2 (P80) 3TE6 is a NVM Express DRAM-less SSD designed with PCIe interface and industrial 3D TLC NAND Flash. M.2 (P80) 3TE6 supports PCIe Gen III x2 and it is compliant with NVM 1.3 providing excellent top and also outstanding sustained performance. With sophisticated error detection and correction (ECC) functions, the module can ensure full End-to-End data path protection that secures the data transmission between host system and NAND Flash. In addition, with embedded AES-256 bit engine, your data can be further secured.

M.2 (P80)

3TE6 series

Contact us for more information about the M2 (P80) 3TE6.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421

Europe
eusales@innodisk.com
+31-40-3045-400


Japan
jpsales@innodisk.com
+81-3-6667-0161

China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2020 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20210310

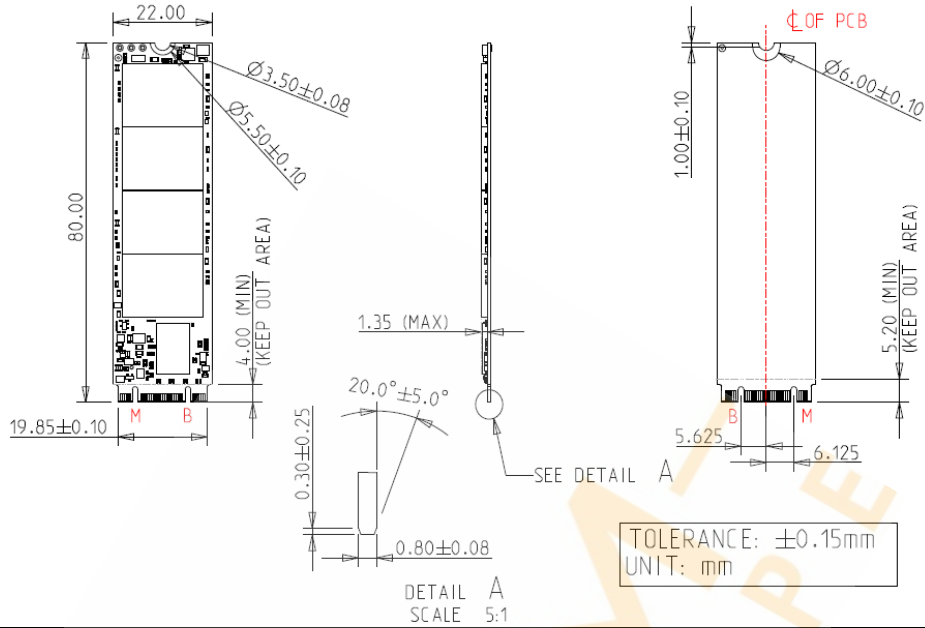

Interface	PCIe Gen. III x2
Flash Type	3D TLC
P/E cycle	3,000
Capacity	64GB~2TB
Max. Channels	4
Sequential R/W (MB/s, Max)	1,650/1,650
Sustained Sequential Write (MB/s, Max, Room Temperature)	1,000
Max. Power Consumption (RMS)	5.3W
Thermal Sensor	✓
External DRAM buffer	NA
H/W Write Protect	NA
iCell	NA
Dimension (WxLxH)	22.0 X 80.0 X 1.35 mm (Without Heat-Dissipating Copper Foil) 22.0 X 80.0 X 1.95 mm (With Heat-Dissipating Copper Foil. Default setting for Industrial Grade PNs.)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Working Temperature: -40°C ~ +85°C MTBF: 3 million hours

Ordering Information

Operation Temp.	64GB	128GB	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C)	DEM28-64GDD1ECCDF	DEM28-A28DD1ECCQF	DEM28-B56DD1ECCQF	DEM28-C12DD1ECCQF	DEM28-01TDD1ECCQF	DEM28-02TDD1ECCQF
Industrial Grade (-40°C ~ +85°C)	DEM28-64GDD1EWCDF	DEM28-A28DD1EWCQF	DEM28-B56DD1EWCQF	DEM28-C12DD1EWCQF	DEM28-01TDD1EWCQF	DEM28-02TDD1EWCQF

innodisk

www.innodisk.com

www.texim-europe.com