

Distributed by:




www.texim-europe.com



SIM7600-H-PCIE Series

SIMCom LTE Cat 4 Module

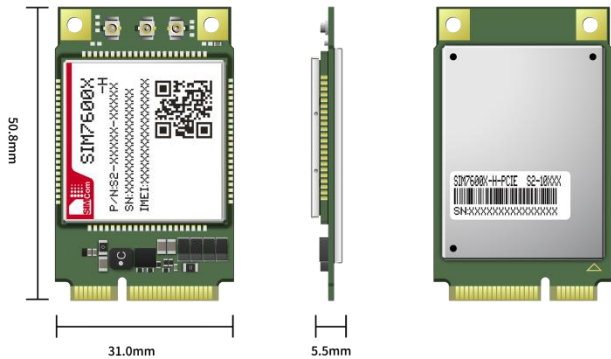


Product Description

The SIM7600-H-PCIE series is the LTE Cat 4 module which supports wireless communication modes of LTE-TDD/LTE-FDD/HSPA+/GSM/GPRS/EDGE etc. It supports maximum 150Mbps downlink rate and 50Mbps uplink rate.

The SIM7600-H-PCIE series adopts mini PCIE form factor and consists of a SIM7600-H series module and a mini PCIE adapter board. It is easy for customers to integrate.

The SIM7600-H-PCIE series integrates multiple satellite high accuracy positioning GNSS systems, with multiple built-in network protocols, supports drivers for main operation systems (USB driver for Windows, Linux and Android etc.) and software function, AT commands are compatible with SIM7500/SIM7600 series modules. Meanwhile the SIM7600-H-PCIE series integrates main industrial standard interfaces, with powerful expansibility, including abundant interfaces such as UART, USB, GPIO, which is suitable for main IoT applications such as telematics, surveillance devices, CPE, industrial routers, and remote diagnostics etc.

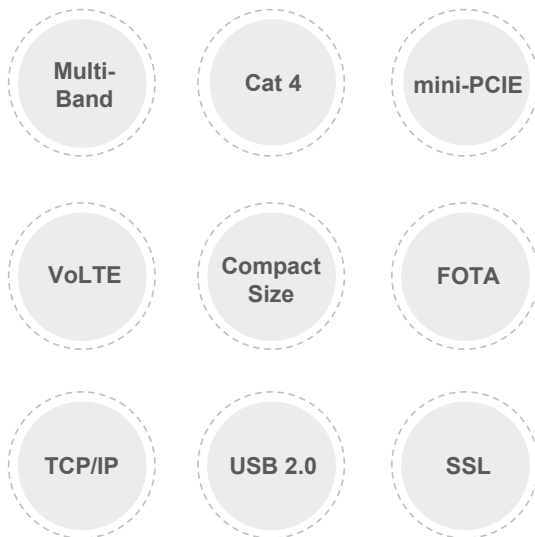

Key Benefits

- ◆ Mini-PCIE interface with strong compatibility
- ◆ Suitable for LTE, UMTS and GSM networks with global coverage
- ◆ Abundant software functions: FOTA, LBS, TLS, VoLTE
- ◆ Multi-constellation GNSS receiver support
- ◆ AT commands of the SIM7600-H-PCIE series are compatible with the SIM7500/SIM7600 series modules

Product	SIM7600A-H-PCIE	SIM7600V-H-PCIE	SIM7600SA-H-PCIE	SIM7600JC-H-PCIE
Form Factor	Mini PCIE	Mini PCIE	Mini PCIE	Mini PCIE
Dimensions(mm)	50.8*31*5.35	50.8*31*5.35	50.8*31*5.35	50.8*31*5.35
Frequency Bands	LTE-FDD	B2/B4/B12	B2/B4/B5/B13	B1/B2/B3/B4/B5/B7/B8/B28/B66
	LTE-TDD			B40
	WCDMA	B2/B5		B1/B2/B5/B8
	GSM			850/900/1800/1900MHz
GNSS	o	o	o	o
Temperature	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Features				
Supply Voltage(V)	3.0~ 3.6	3.0~ 3.6	3.0~ 3.6	3.0~ 3.6
Power Consumption (mA)	LTE	2.3	2.3	2.3
	WCDMA, DRX=9	3.3		3.3
	GSM,BS_PA_MFRMS=2			2.8
Data Transfer				
LTE(Mbps)	150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)
HSPA+(Mbps)	42(DL)/5.76(UL)		42(DL)/5.76(UL)	
WCDMA(Kbps)	384(DL)/384(UL)		384(DL)/384(UL)	
GPRS/EDGE(Kbps)			236.8(DL)/236.8(UL)	
Software Features				
Protocol	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/ HTTP/ HTTPS/DNS
TLS	●	●	●	●
File System	●	●	●	●
Audio Record/Play	o	o	o	o
TTS	o	o	o	o
DTMF	o	o	o	o
LBS	●	●	●	●
FOTA	●	●	●	●
Jamming Detection	●	●	●	●
Android RIL	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)	●	●	●	●
ECM	●	●	●	●
MBIM	Win8/Win10	Win8/Win10	Win8/Win10	Win8/Win10
NDIS	Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10
Open Linux	o	o	o	o
Firmware Upgrade	USB/FOTA	USB/FOTA	USB/FOTA	USB/FOTA
Interfaces				
SIM Card	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART	●	●	●	●
USB	●	●	●	●
PCM	o	o	o	o
Analog Audio	o	o	o	o
Embedded SIM card socket	o	o	o	o
Diversity Receiver	●	●	●	●
Certification				
Regulatory	FCC/PTCRB/IC/RoHS/ REACH	FCC/GCF/RoHS/REACH	CE-RED/ACMA/FCC/NCC/ RoHS/REACH/Anatel	Telec/JATE/RoHS/REACH
Carrier	AT&T	Verizon		Docomo/Softbank

● : support o : optional * : on going

Product		SIM7600E-H-PCIE	SIM7600E-H1C-PCIE	SIM7600NA-H-PCIE	SIM7600G-H-PCIE
Form Factor		Mini PCIE	Mini PCIE	Mini PCIE	Mini PCIE
Dimensions(mm)		50.8*31*5.35	50.8*31*5.35	50.8*31*5.35	50.8*31*5.35
Frequency Bands	LTE-FDD	B1/B3/B5/B7/B8/B20	B1/B3/B5/B7/B8/B20	B2/B4/B5/B12/B13/B14/B25/B26/B66/B71	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66
	LTE-TDD	B38/B40/B41	B38/B40/B41	B41	B34/B38/B39/B40/B41
	WCDMA	B1/B5/B8	B1/B5/B8		B1/B2/B4/B5/B6/B8/B19
	GSM	900/1800MHz	900/1800MHz		850/900/1800/1900MHz
GNSS		o	o	o	o
Temperature		-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C	-40°C ~ +85°C
Electrical Features					
Supply Voltage(V)		3.0~ 3.6	3.0~ 3.6	3.0~ 3.6	3.0~ 3.6
Power Consumption (mA)	LTE	2.3	2.3	2.3	2.3
	WCDMA, DRX=9	3.3	3.3		3.3
	GSM,BS_PA_MFRMS=2	2.8	2.8		2.8
Data Transfer					
LTE(Mbps)		150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)	150(DL)/50(UL)
HSPA+(Mbps)		42(DL)/5.76(UL)	42(DL)/5.76(UL)		42(DL)/5.76(UL)
WCDMA(Kbps)		384(DL)/384(UL)	384(DL)/384(UL)		384(DL)/384(UL)
GPRS/EDGE(Kbps)		236.8(DL)/236.8(UL)	236.8(DL)/236.8(UL)		236.8(DL)/236.8(UL)
Software Features					
Protocol		TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/ HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS	TCP/IP/IPV4/IPV6/ Multi-PDP/FTP/FTPS/HTTP/ HTTPS/DNS
TLS		●	●	●	●
File System		●	●	●	●
Audio Record/Play		o	o	o	o
TTS		o	o	o	o
DTMF		o	o	o	o
LBS		●	●	●	●
FOTA		●	●	●	●
Jamming Detection		●	●	●	●
Android RIL		Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0	Android 5.0/6.0/7.0/8.0/9.0
USB Driver		Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android	Microsoft Windows 7/8/10 Linux/Android
WWAN (RNDIS)		●	●	●	●
ECM		●	●	●	●
MBIM		Win8/Win10	Win8/Win10	Win8/Win10	Win8/Win10
NDIS		Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10	Linux/Windows 7/8/10
Open Linux		o		o	o
Firmware Upgrade		USB/FOTA	USB	USB/FOTA	USB/FOTA
Interfaces					
SIM Card		1.8V/3.0V	1.8V/3.0V	1.8V/3.0V	1.8V/3.0V
UART		●	●	●	●
USB		●	●	●	●
PCM		o	o	o	o
Analog Audio		o	o	o	o
Embedded SIM card socket		o	o	o	o
Diversity Receiver		●	o	●	●
Certification					
Regulatory		CE-RED/RoHS/REACH/ IMDA/GCF	CE-RED/RoHS/REACH	FCC/IC/PTCRB/GCF/ RoHS/REACH	CE-RED/FCC/IC/RCM/CCC/ SRRC/Telec/Jate/Anatel/NCC/ IMDA/KC/ICASA/UKCA/PTCRB/ GCF/RoHS/REACH
Carrier		DEUTSCHE TELEKOM /Vodafone		AT&T/Verizon/US Cellular/ T-mobile	AT&T/Verizon/T-mobile/US Celluar/DEUTSCHE TELEKOM /Telstra/Orange

●: support o: optional *: on going



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 9713293
E: italy@texim-europe.com