


IEC320-C13 (EU)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: CEBC, KEMA, NF, OVE, VDE, IMQ, FI, S, D, N, ENEC, KC

Length/cord		1.8m / 0.75mm ²
Plug		SP-022 16A/250V
Connector		IS-14 10A/250V
Rating		300/500V 70°C
Flex cord		H05VV-F
WEIGHT / PACKING	1pc	N.W.: 192 g / pc
	BOX	100 pcs / 1box
		G.W.: 18,9 kg / box
		0.55x0.36x0.20 [m]



IEC320-C13 (UK)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: ASTA, Singapore, ENEC

Length/cord		1.8m / 0.75mm ²
Plug		SP-62 5A/250V
Connector		IS-14 10A/250V
Fuse		5A
Rating		300/500V 70°C
Flex cord		H05VV-F
WEIGHT / PACKING	1pc	N.W.: 202 g / pc
	BOX	75 pcs / 1box
		G.W.: 15,9 kg / box
		0.55x0.36x0.20 [m]



IEC320-C13 (USA)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: UL, CSA

Length/cord		1.8m / 0.75mm ²
Plug		SP-305B 10A/125V
Connector		IS-14 10A/125V
Rating		300V 105°C
Flex cord		SVT
WEIGHT / PACKING	1pc	N.W.: 149 g / pc
	BOX	125 pcs / 1box
		G.W.: 20,2 kg / box
		0.55x0.36x0.20 [m]



Distributed by:

IEC320-C13 (Aus)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: SAA

Length/cord	1.8m / 0.75mm ²	
Plug	SP-502B 10A/250V	
Connector	IS-14 10A/250V	
Rating	250/440V 75°C	
Flex cord	H05VV-F	
WEIGHT / PACKING	1pc	N.W.: 197 g / pc
	BOX	90 pcs / 1box
		G.W.: 17,6 kg / box
		0.55x0.36x0.20 [m]


IEC320-C13 (Brazil)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: Inmetro, ENEC

Length/cord	1.8m / 0.75mm ²	
Plug	SP027A 10A/250V	
Connector	IS-14 10A/250V	
Rating	300/500V 70°C	
Flex cord	H05VV-F	
WEIGHT / PACKING	1pc	N.W.: 158 g / pc
	BOX	120 pcs / 1box
		G.W.: 18,8 kg / box
		0.55x0.36x0.20 [m]


IEC320-C13 (Swiss)

Country of Origin: China
 RoHS: yes
 Application: For Class I. Appliances
 Approvals: +S, ENEC

Length/cord	1.8m / 0.75mm ²	
Plug	SP-027C 10A/250V	
Connector	IS-14 10A/250V	
Rating	300/500V 70°C	
Flex cord	H05VV-F	
WEIGHT / PACKING	1pc	N.W.: 169 g / pc
	BOX	100 pcs / 1box
		G.W.: 17,4 kg / box
		0.55x0.36x0.20 [m]



Distributed by:

IEC320-C13 (China)

Country of Origin	China
RoHS	yes
Application	For Class I. Appliances
Approvals	CCC

Length/cord		1.8m / 3x1.0mm ²
Plug		SP-506A 10A/250V
Connector		IS-14 10A/250V
Rating		300/500V 70°C
Flex cord		RVV
WEIGHT / PACKING	1pc	N.W.: 182 g / pc
	BOX	100 pcs / 1box
		G.W.: 19,3 kg / box
		0.55x0.36x0.20 [m]



IEC320-C13 (Argentina)

Country of Origin	China
RoHS	yes
Application	For Class I. Appliances
Approvals	IRAM, ENEC


Length/cord		1.8m / 0.75mm ²
Plug		SP-852 10A/250V
Connector		IS-14 10A/250V
Rating		300/500V 70°C
Flex cord		H05VV-F
WEIGHT / PACKING	1pc	N.W.: 179 g / pc
	BOX	100 pcs / 1box
		G.W.: 18,6 kg / box
		0.55x0.36x0.20 [m]



IEC320-C13 (Italy)

Country of Origin	China
RoHS	yes
Application	For Class I. Appliances
Approvals	IMQ, D, CEBC, S FI, N, IMQ, NF, OVE, KEMA, +S, VDE

Length/cord		1.8m / 0.75mm ²
Plug		SP-028 10A/250V
Connector		IS-14 10A/250V
Rating		300/500V 70°C
Flex cord		H05VV-F
WEIGHT / PACKING	1pc	N.W.: 158 g / pc
	BOX	100 pcs / 1box
		G.W.: 16,9 kg / box
		0.55x0.36x0.20 [m]



Distributed by:



www.texim-europe.com

www.sunny-euro.com

IEC320-C13 (Japan)

Country of Origin	China
RoHS	yes
Application	For Class I. Appliances
Approvals	PSE

Length/cord	1.8m / 3x0.75mm ²	
Plug	SP-18P 7A/125V	
Connector	IS-14 7A/125V	
Rating	300V 60°C	
Flex cord	VCTF	
WEIGHT / PACKING	1pc	N.W.: 166 g / pc
	BOX	100 pcs / 1box
		G.W.: 17,3 kg / box
		0.55x0.36x0.20 [m]



Distributed by:



www.texim-europe.com

www.sunny-euro.com

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

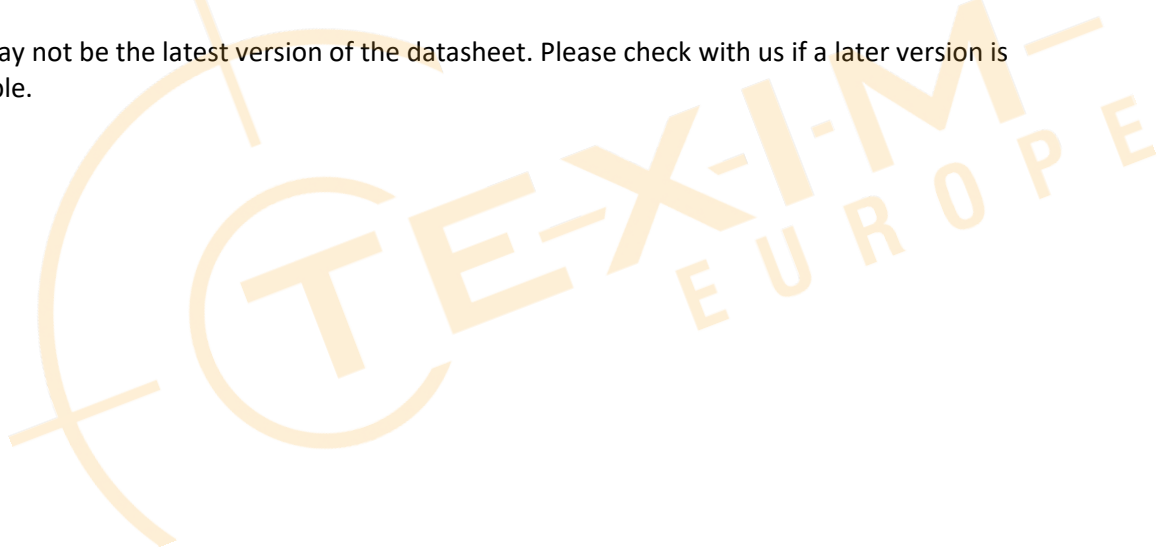



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik


T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS


T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com