

Distributed by:





Functional characteristics

Width of PCB: 72 mm (2.835 in)
Support Type: modular
Standard Colour: green
Thickness of PCB: .063 in (1.6 mm)
Material: PA6.6 (UL94-V0)

Description

1 Base Element
2 Base Element
3 Base Element
4 Lateral Element
5 DIN Rail Hook
6 Complete Module (12.5 mm for 11 mm PCB)

Part-Number	Pcs / pack
SMC072S045	50
SMC072S022	50
SMC072S011	50
SMC072T011	50
SMC072P020	50
SMC072T013	50


Modular Supports for 72 mm (2.835 in) Wide Boards

Base Elements with two Lateral Elements and one or two DIN Rail Hooks are combined together in order to obtain PCB Supports according to the following table. For 11 mm (.433 in) wide PCBs, a single Complete Module is provided by assembling two parts together.

The following table shows the configuration of support elements and the corresponding total length of the assembled support and the length of the PCB.

The following table shows the configuration of support elements and the corresponding total length of the assembled support and the religin of the rob.										
Length of PCB Len		Length o	f support	Lateral Element	Base Element	Base Element	Base Element	DIN Rail Hook	Complete Module	
(mm)	(in)	(mm)	(in)	SMC072T011	SMC072S011	SMC072S022	SMC072S045	SMC072P020	SMC072T013	
11,00	.433	12,50	.492						1	
20,00	.787	22,50	.886	2				1		
31,25	1.230	33,75	1.329	2	1			1		
42,50	1.673	45,00	1.772	2		1		2		
53,75	2.116	56,25	2.215	2	1	1		2		
65,00	2.559	67,50	2.657	2			1	2		
76,25	3.002	78,75	3.100	2	1		1	2		
87,50	3.445	90,00	3.543	2		1	1	2		
98,75	3.888	101,25	3.986	2	1	1	1	2		
110,00	4.331	112,50	4.429	2			2	2		
121,25	4.774	123,75	4.872	2	1		2	2		



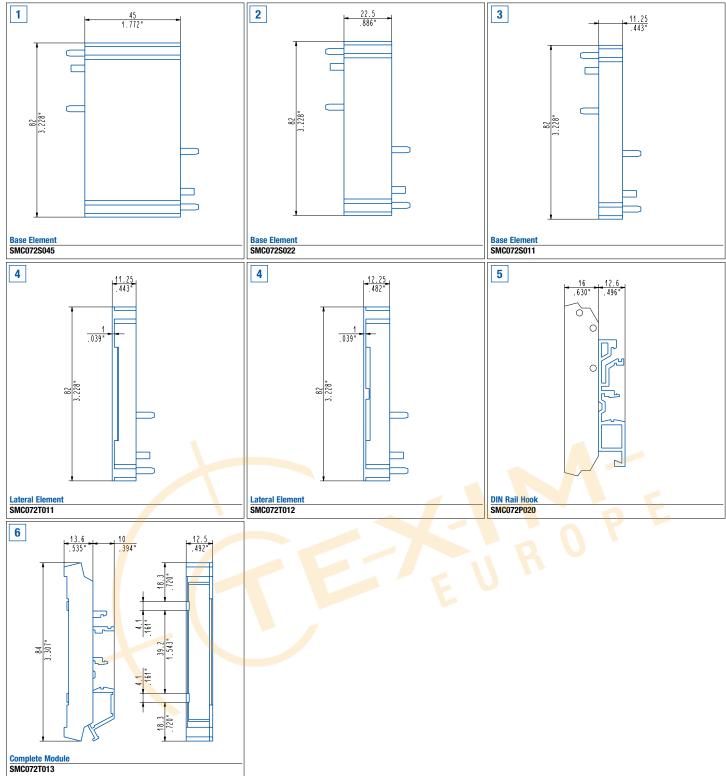

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.



Texim Europe - contact details



Headquarters & Warehouse

Elektrostraat 17 NL-7483 PG Haaksbergen The Netherlands

T: +31 (0)53 573 33 33 E: info@texim-europe.com Homepage: www.texim-europe.com









The Netherlands

Elektrostraat 17 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33 E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10 B-1731 Zellik

T: +32 (0)2 46<mark>2 0</mark>1 00 E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane Carlton Le Moorland Lincoln LN5 9HS

T: +44 (0)1522 789 555 E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92 D-25451 Quickborn

T: +49 (0)4106 627 07-0 E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9 A-5020 Salzburg

T: +43 (0)662 216 026 E: austria@texim-europe.com



Nordic

Stockholmsgade 45 2100 Copenhagen

T: +45 88 20 26 30 E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: italy@texim-europe.com