

Functional characteristics

Dimensional class: low Standard colour: green

Pitches: metric 3.5 mm, 7 mm (.138 in, .276 in) imperial 3.81 mm, 7.62 mm (.150 in, .300 in) $10.5 \div 11.5$ mm (.41 \div .45 in)

Stripping length: -40 °C ÷ +105 °C (-40 °F ÷ +221 °F) Operating temperature range:

Contact resistance: <15 m Ω Insulating material group: I (CTI \geq 600V)

Self-extinguishing class UL94: V0 Insulation resistance: >109 Ω (500V DC)

Data according to

UL 1059

300 V - 10 A - 30÷16 AWG


IEC EN 60947-7-4


Not side stackable

150 V - 10 A - 1.5 mm² - for 3.5 mm and 3.81 mm pitch 300 V - 10 A - 1.5 mm² - for 7 mm and 7.62 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

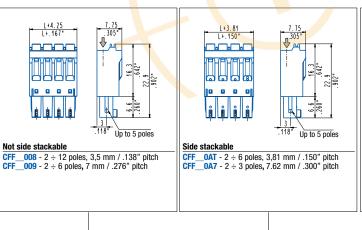





Usable with:

CTM	СТМН	CTM/CTMH D.	CKF-SC1
Page 64	Page 65	Page 67	Page 84













Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.

It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.



Texim Europe - contact details



Headquarters & Warehouse

Elektrostraat 17 NL-7483 PG Haaksbergen The Netherlands

T: +31 (0)53 573 33 33 E: info@texim-europe.com Homepage: www.texim-europe.com









The Netherlands

Elektrostraat 17 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33 E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10 B-1731 Zellik

T: +32 (0)2 46<mark>2 0</mark>1 00 E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane Carlton Le Moorland Lincoln LN5 9HS

T: +44 (0)1522 789 555 E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92 D-25451 Quickborn

T: +49 (0)4106 627 07-0 E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9 A-5020 Salzburg

T: +43 (0)662 216 026 E: austria@texim-europe.com



Nordic

Stockholmsgade 45 2100 Copenhagen

T: +45 88 20 26 30 E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9 D-81829 München

T: +49 (0)89 436 086-0 E: italy@texim-europe.com