

Distributed by:



www.texim-europe.com



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : Winstar

MODEL NO. : WLOF00035000LNFAAEA00

APPROVED BY: (FOR CUSTOMER USE ONLY)	
--	--

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
		TingWei Lee ShiWei Yang	Kyra Chen Jason Chan

VERSION	DATE	REVISED PAGE NO.	SUMMARY
2	2023/5/19	P.7	Revise LCD type to white and revise SDRAM Frequency

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>

RECORDS OF REVISION			DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2022/07/14		First issue
1	2022/12/20	P.6, P.7	Increase external flash size into 16M
2	2023/5/19	P.7	Revise LCD type to white and revise SDRAM Frequency



Contents

1. Smart Display Classification Information
2. Summary
3. Product information
4. Contour Drawing
5. Absolute Maximum Ratings
6. Electrical Characteristics
7. BOM
8. Block diagram
9. Interface
10. Reliability
11. Product inspection check list
12. Display Usage & References

1. Smart Display Classification Information

W	L	0F	000350	00L	N	F	AA	E	A	00
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

①	W: WINSTAR products			
②	Type: L:Standard K:Customization			
③	Display Type:	Standard:	0H: Character STN 0X: Graphic STN (TAB/COF) 0F: TFT EH: Character OLED EX: OLED (TAB/COF)	0G: Graphic STN 0P: Graphic STN (COG) EG: Graphic OLED EP: OLED (COG)
		Customization:	DH: Character DN: Graphic ED: OLED	DG: Graphic STN 0J: TFT
④	Display size: (diagonal) / Display format: (resolution)	Character STN:	e.g., 8x1: 000801 16x2: 001602 24x4: 002404	
		Graphic STN:	e.g., 128x64: 012864 320x240: 320240	
		TFT Size (inch):	000096-0.96" / 000350-3.5" / 000430-4.3" / 000570-5.7" 000700-7.0" / 000800-8.0" / 001020-10.2" / 001210-12.1" (The last two digits are two digits after the decimal point)	
		OLED:	e.g., 128x64: 012864 Customization: 0001XX	
⑤	Serial No:	0A1 ~ 0ZZ	Customization STN: 000	

⑥	Touch Panel Type:	N: Without TP T: RTP G: CTP		
⑦	Model Interface:	A: CAN B: Bluetooth C:Controller Specified D: RS485 E: RS232 F: USART G: Logic I/O	H: HDMI R: Memory Specified P: RS422 N: Ethernet J: Analog I/O K: USB L: WIFI M: Zigbee	X: Combined Y: Proprietary interface
⑧	Interface Serial No.:	AA ~ ZZ		
⑨	Control Category:	S: Smart Display N: Non-specified E: Entry		
⑩	Special Code:	A → Generic B → Industrial C →Automotive D →Medical		
⑪	Model code:	00 ~ ZZ		

2. Summary

WL0F00035000LNFAAEA00 is built in TFT 3.5" TN display. The features describe as below:

3.5 Inch Smart Display Feature

1. DC 5V working voltage.
2. UART Interface with customized UART protocol, default baud rate at 19200 bit/Sec.
3. Built in 16M flash memory.
4. WL0F00035000LNFAAEA00 is defined as a slave device, which is controlled by master device via customized command to render display content on the display screen and return touch event position.




3. Product information

General information

Item	Standard Value	Unit
Operating voltage	5	Vdc
Communication Interface	UART	N/A
MCU	IT9866	N/A
Flash Memory	16	MB
SDRAM Frequency	16MB/ 360MHz	
LCD display size	3.5	inch
Dot Matrix	320 x RGB x 240(TFT)	dot
Module dimension	100.0(W)*66.1(H)*7.23(D)	mm
Active area	70.08 x 52.56	mm
Dot pitch	0.073 x 0.219	mm
Brightness	350min, 420typ	cd/m ²
LCD type	TFT, Normally White, Transmissive	
View Direction	12 o'clock	
Aspect Ratio	4:3	
With /Without TP	Without TP	
Surface	Anti-Glare	

4. Contour Drawing

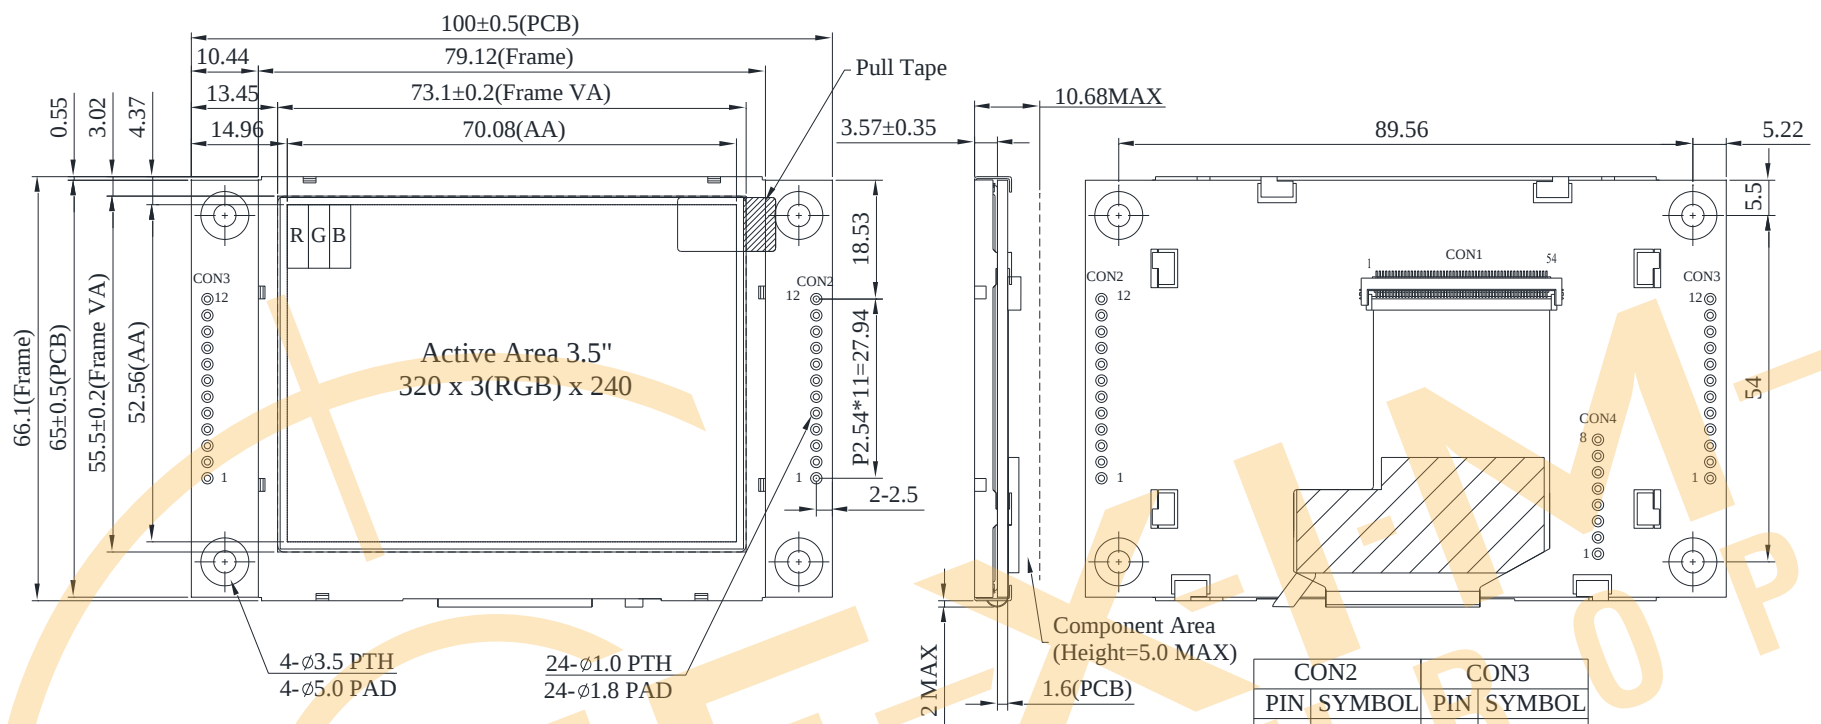

CON2		CON3	
PIN	SYMBOL	PIN	SYMBOL
1	GND	1	GND
2	UART_TX	2	SW1
3	UART_RX	3	SW2
4	+5V	4	SW3
5	D+	5	SW4
6	D-	6	GND
7	GND	7	NC
8	/REST	8	NC
9	GND	9	NC
10	PWM	10	NC
11	GND	11	INT
12	+5V	12	+5V

The non-specified tolerance of dimension is ±0.3mm.

5. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-20	—	+70	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above
1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C


6. Electrical Characteristics

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	4.5	5-	5.5	V
Supply current	ICC	-	340		mA

7. BOM

Item	Description	Remark
LCM	WF35LTIACDNN0#	
PCBA	SV10003R500LA00N0100	

8. Block diagram

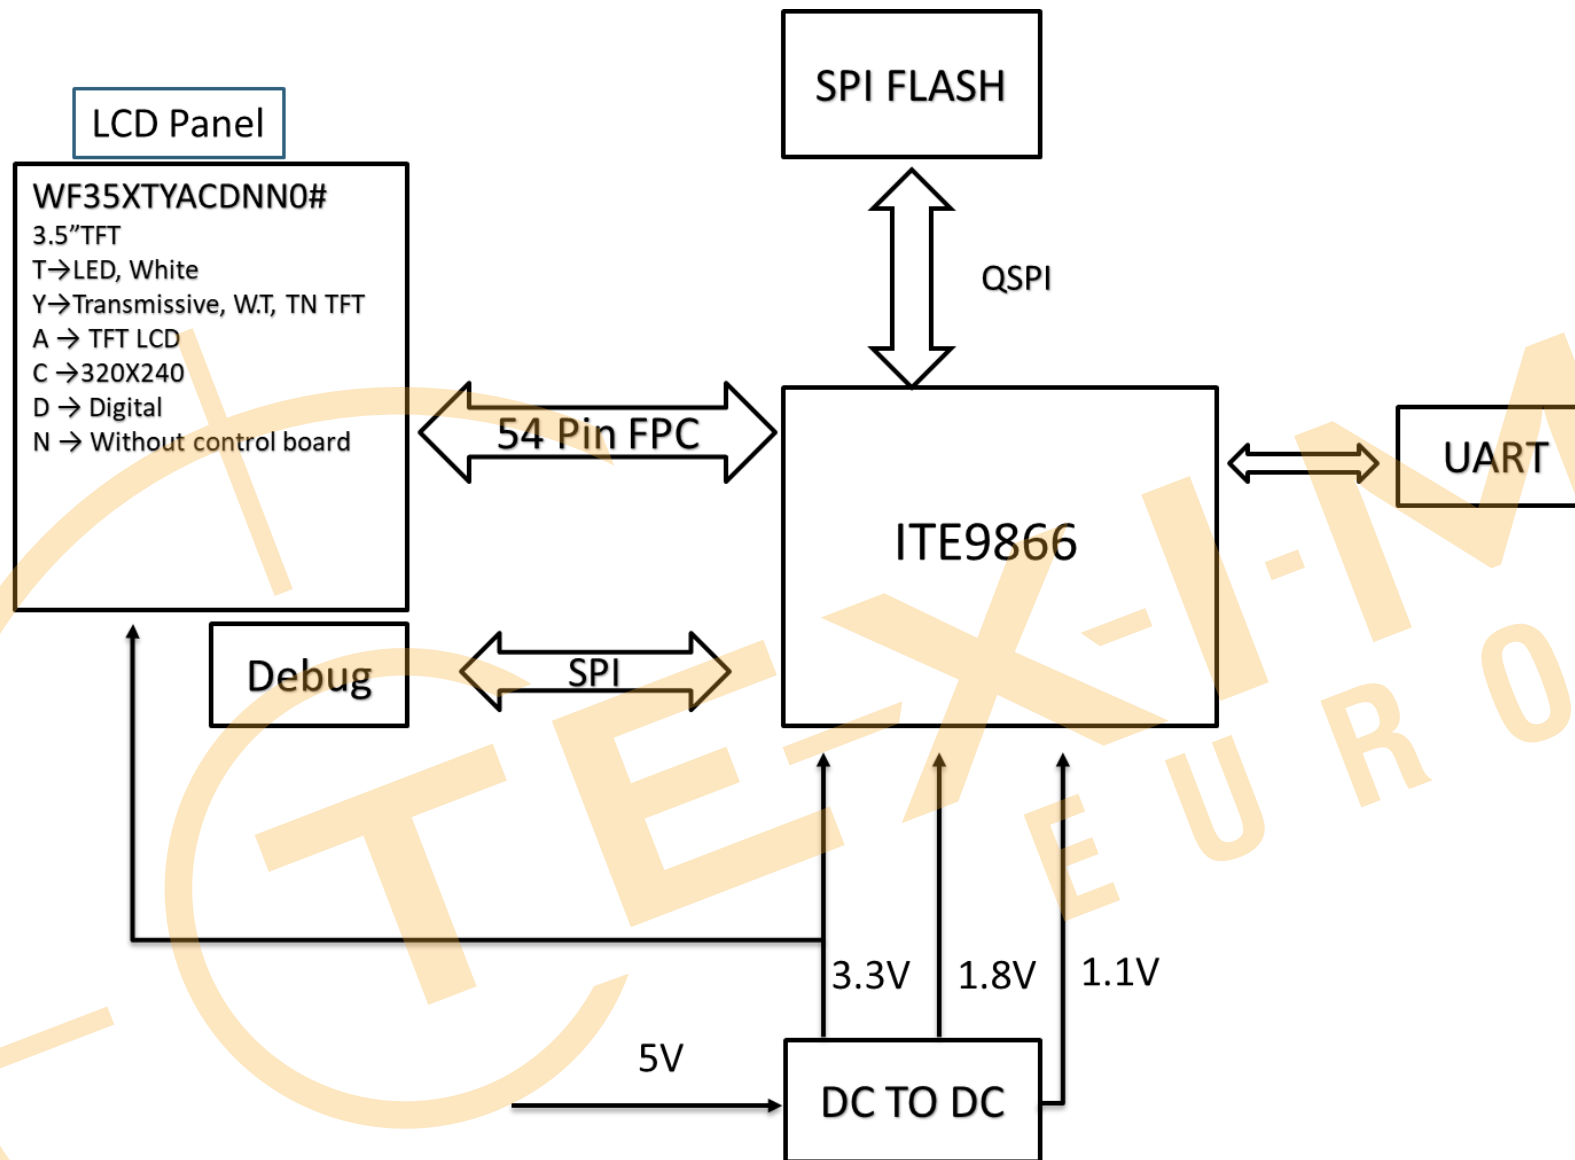

9. Interface

CON2 definition:


Pin	Symbol	Function	Remark
1	GND	Power Ground	
2	UART_TX	UART TX	
3	UART_RX	UART RX	
4	+5V	Power supply 5V	
5	D+	USB Data+	
6	D-	USB Data-	
7	GND	Power Ground	
8	/REST	Reset (active Low)	
9	GND	Power Ground	
10	PWM	Pulse width modulation	
11	GND	Power Ground	
12	+5V	Power supply : 5V	

CON3 definition:

Pin	Symbol	Function	Remark
1	GND	Power Ground	
2	SW1	Switch (active low)	
3	SW2	Switch (active low)	
4	SW3	Switch (active low)	
5	SW4	Switch (active low)	
6	GND	Power Ground	
7	NC	Reserved	
8	NC	Reserved	
9	NC	Reserved	
10	NC	Reserved	
11	INT	Interrupt output for CTP or external switch	
12	+5V	Power supply : 5V	

10. Reliability

Content of Reliability Test (Wide temperature, -20°C~70°C)

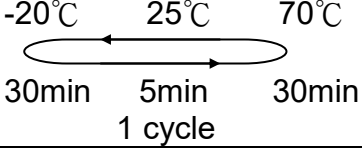Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 96hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 96hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70°C 240hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20°C 240hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 40°C,90%RH max	40°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation 	-20°C/70°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±2KV~±6KV(contact),±2KV~±8KV (air), RS=330Ω CS=150pF 10 times	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.

11. Product inspection check list

Check samples by meter V_{IN} , I_{system}

Item	No 1	No 2	No 3	Note
V_{IN} (V)	4.82	4.79	-	
I_{system} (mA)	341	346	-	

Check sample Reliability Test

Item	Result	Note
Thermal shock	PASS_2021	-20°C/70°C 20 cycles
High Temperature Operation	PASS_2021	70°C 96hrs
Low Temperature Operation	PASS_2021	-20°C 96hrs
Static electricity test	PASS_2021	VS=±2KV~±6KV(contact),±2KV~±8KV (air), RS=330Ω CS=150pF 10 times
Vibration test	—	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes

- Prepare sets for testing

12. Display Usage

Please refer to **SmartDisplay Entry User Guide** for the details of UART commands and Clever System User API.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

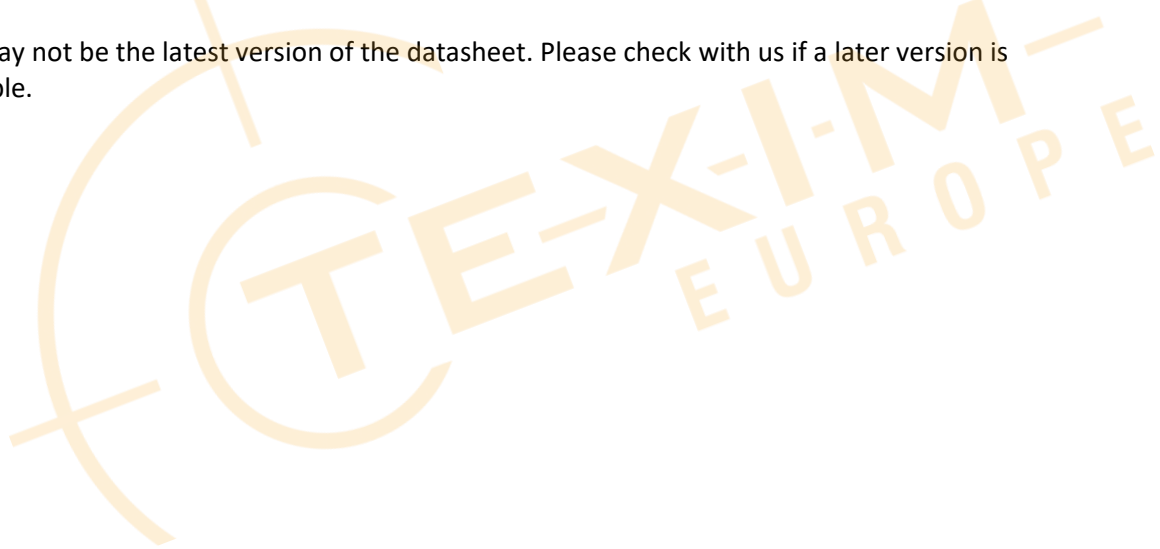



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com