

Distributed by:



www.texim-europe.com



WINSTAR Display Co.,Ltd.
華凌光電股份有限公司



Winstar Display Co., LTD

華凌光電股份有限公司



WEB: <https://www.winstar.com.tw> E-mail: sales@winstar.com.tw

SPECIFICATION

CUSTOMER : _____

MODEL NO. : WLOF00050000FGAACSA01

APPROVED BY:

(FOR CUSTOMER USE ONLY)

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY
	Ginger Xu	Eason Chang ShiWei Yang	Jason Chan

VERSION	DATE	REVISED PAGE NO.	SUMMARY
B	2025/01/17	p7	Revised the LCD type

TFT Display Inspection Specification: <https://www.winstar.com.tw/technology/download.html>

Precaution in use of TFT module: <https://www.winstar.com.tw/technology/download/declaration.html>

RECORDS OF REVISION			DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2023/02/04		First issue
A	2024/11/08	p6,7	Revised the content of feature
B	2025/01/17	p7	Revised the LCD type

Contents

1. Smart Display Classification Information
2. Summary
3. Product information
4. Contour Drawing
5. Absolute Maximum Ratings
6. Electrical Characteristics
7. BOM
8. Block diagram
9. Interface
10. Reliability
11. Product inspection check list

1. Smart Display Classification Information

W	L	OF	000500	00F	G	A	AC	S	A	01
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪

①	W: WINSTAR products			
②	Type: L:Standard K:Customization			
③	Display Type:	Standard:	OH: Character STN OX: Graphic STN (TAB/COF) OF: TFT EH: Character OLED EX: OLED (TAB/COF)	OG: Graphic STN OP: Graphic STN (COG) EG: Graphic OLED EP: OLED (COG)
		Customization:	DH: Character DN: Graphic ED: OLED	DG: Graphic STN OJ: TFT
④	Display size: (diagonal) / Display format: (resolution)	Character STN:	e.g., 8x1: 000801 16x2: 001602 24x4: 002404	
		Graphic STN:	e.g., 128x64: 012864 320x240: 320240	
		TFT Size (inch):	000096-0.96" / 000350-3.5" / 000430-4.3" / 000570-5.7" 000700-7.0" / 000800-8.0" / 001020-10.2" / 001210-12.1" (The last two digits are two digits after the decimal point)	
⑤	Serial No:	OLED:	e.g., 128x64: 012864 Customization: 0001XX	
		0A1 ~ 0ZZ	Customization STN: 000	

⑥	Touch Panel Type:	N: Without TP T: RTP G: CTP		
⑦	Model Interface:	A: CAN B: Bluetooth C: Controller Specified D: RS485 E: RS232 F: USART G: Logic I/O	H: HDMI R: Memory Specified N: Ethernet J: Analog I/O K: USB L: WIFI M: Zigbee	X: Combined Y: Proprietary interface
⑧	Interface Serial No.:	AA ~ ZZ		
⑨	Control Category:	S: Smart Display E: Entry N: Non-specified		
⑩	Special Code:	A → Generic B → Industrial C → Automotive D → Medical		
⑪	Model code:	00 ~ ZZ		

2. Summary

5 Inch Smart Display Feature

1. DC 5V working voltage.
2. Self-testing after booting function.
3. CAN bus communication interface.
4. Support CANopen protocol with default baud rate 250KB.
5. Built in 16MB external flash memory to store the font and Object Dictionary Data.
6. Support capacitive touch panel (CTP).
7. Smart Display scenario is slave device and controlled by Master Device's instruction.
8. Build in buzzer and can be controlled by Master Device.
9. Demo set HOST can be used on multiple platforms, such as Computer (with USB to CAN Dongle), MCU, Raspberry Pi (with PiCAN2).

3. Product information

General information

Item	Standard Value	Unit
Operating voltage	5	Vdc
Communication Interface	CAN bus differential ± 3.3	Vpp
MCU	STM32F750	N/A
Flash Memory	16	MB
SDRAM Frequency	108	MHz
LCD display size	5.0	inch
Dot Matrix	800× 3(RGB) × 480	dot
Module dimension	132.7(W) ×75.8(H) ×12.5	mm
Active area	108(W) ×64.8 (H)	mm
Pixel pitch	0.135(W) ×0.135(H)	mm
Brightness	Min: 650; Typ: 750	cd/m ²
LCD type	TFT, Normally Black , Transmissive	
View Direction	80/80/80/80	
Aspect Ratio	15:9	
With /Without TP	With CTP	
Surface	Glare	

Top View Dimensions:

- Overall Width: 132.7_i Ø5 (PCB)
- Overall Height: 75.8_i Ø3 (TFT OD)
- Active Area: 800 x 3(RGB) x 480
- CTP Zero point(0,0)
- Black Printing
- 4-R0.5
- 4-Ø3.5(NPTH)
- 2 MAX
- 1.6(PCB)
- 12.5 MAX
- 6_i Ø5
- 0.5_i Ø5
- (5.1)
- 4.61_i Ø5
- (2.78 TFT)
- 5.8_i Ø5
- (1.68 TP)
- 6.3
- 108 (TFT AA)
- 109 (TP VA)
- (110.4 TP AA)
- 119.7 (TP OD)
- 120.7_i Ø3 (TFT OD)
- 75.4_i Ø5 (PCB)
- 75.2 (TP OD)
- (67 TP AA)
- 65.6 (TP VA)
- 64.8 (TFT AA)
- 3.42
- 3.02_i Ø5
- (2.32)
- 0.6_i Ø5
- (0.2)

Side View Dimensions:

- 68.4
- 3.5
- 3.5
- 125.7
- 2-18.6
- 2-P2.54*15=38.1
- 2-2.5
- 485_TM
- CON1
- CON2
- CON3
- CON4
- IC
- component area
- BI
- Ø1.0 PTH
- Ø2.0 PAD
- Pull tape
- C0.15

Pin Configurations:

CON2

PIN	SYMBOL
1	+3V3
2	SWCLK
3	GND
4	SWDIO
5	NRST
6	GND
7~16	NC

CON1

PIN	SYMBOL	PIN	SYMBOL
1	+5V	9	VDD_5V
2	GND	10	Reserve
3	CAN_H	11	Reserve
4	CAN_L	12	GND
5	VDD_5V	13	VDD_5V
6	NC	14	NC
7	NC	15	NC
8	GND	16	GND

The non-specified tolerance of dimension is ± 0.3 mm.

5. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	TOP	-30	—	+80	°C
Storage Temperature	TST	-30	—	+80	°C

Note: Device is subject to be damaged permanently if stresses beyond those absolute maximum ratings listed above
1. Temp. $\leq 60^{\circ}\text{C}$, 90% RH MAX. Temp. $> 60^{\circ}\text{C}$, Absolute humidity shall be less than 90% RH at 60°C

6. Electrical Characteristics

Item	Symbol	Min	Typ	Max	Unit
Supply Voltage	VCC	4.75	5	5.25	V
Supply Current	ICC		500		mA


7. BOM

Item	Description	Remark
LCM	WF50FSWAGDNG0#	
PCBA	SV10005R000FF00N0101	

WINSTAR DISPLAY Co., Ltd.



8. Block diagram

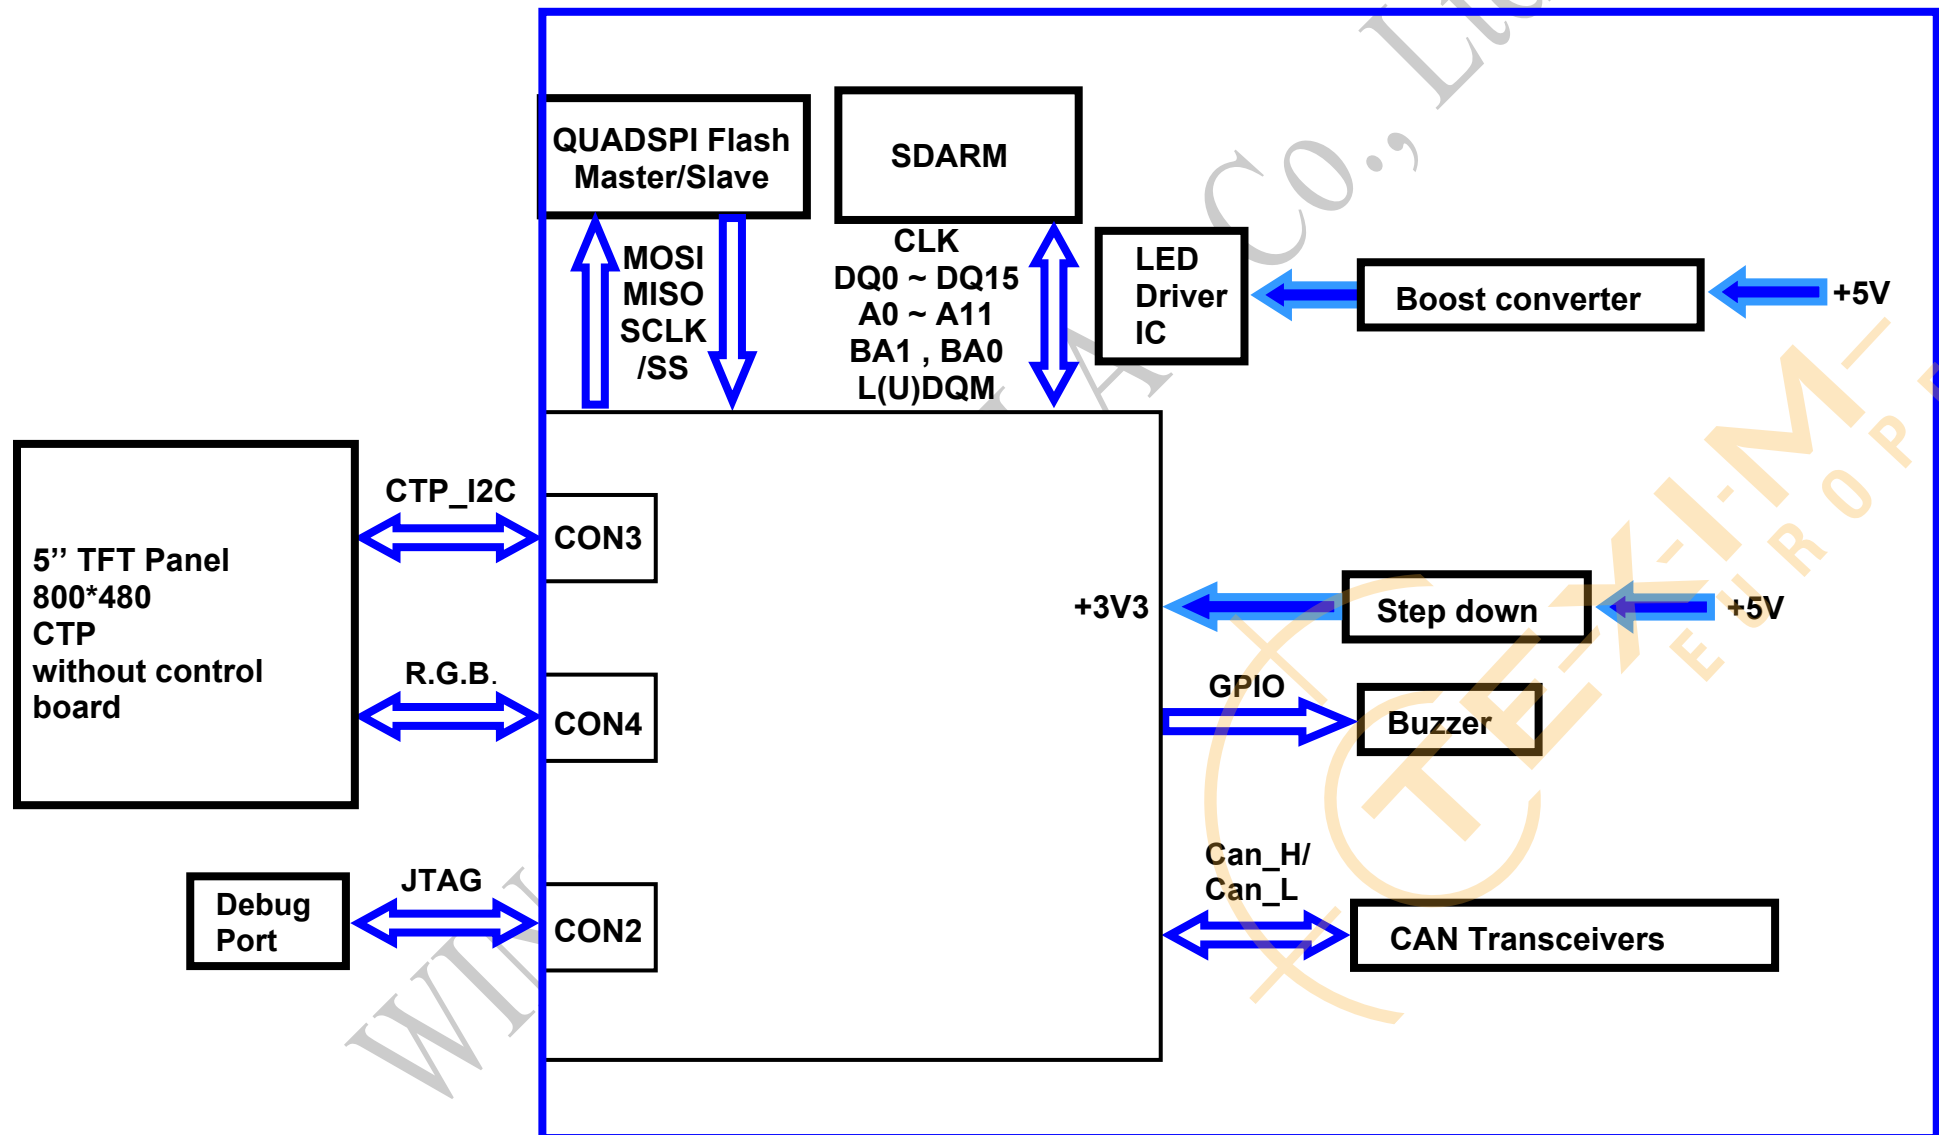

9. Interface

CON1 definition:


Pin	Symbol	Function	Remark
1	+5V	Power supply 5V input	Input
2	GND	Power supply GND input	Input
3	CAN_H	CAN bus D+	I/O
4	CAN_L	CAN bus D-	I/O
5	VDD_5V	Power supply 5V input	Input
6	NC	--	-
7	NC	--	-
8	GND	Power supply GND input	Input
9	VDD_5V	Power supply 5V input	Input
10	Reserve	USART RX interface(Reserve)	Reserve
11	Reserve	USART TX interface(Reserve)	Reserve
12	GND	Power supply GND input	Input
13	VDD_5V	Power supply 5V input	Input
14	NC	--	-
15	NC	--	-
16	GND	Power supply GND input	Input

CON2 definition:

Pin	Symbol	Function	Remark
1	+3V3	3.3V power for JTAG interface	Output
2	SWCLK	CLK pin for JTAG interface	Input
3	GND	GND for JTAG interface	Output
4	SWDIO	Data pin for JTAG interface	I/O
5	NRST	Reset pin for JTAG interface	Input
6	GND	GND	Output
7-16	NC	--	-

10. Reliability

Content of Reliability Test (Super Wide temperature, -30°C~80°C)

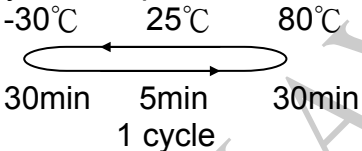Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80°C 96hrs	2
Low Temperature storage	Endurance test applying the low storage temperature for a long time.	-30°C 96hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	80°C 240hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-30°C 240hrs	1
High Temperature/Humidity Operation	The module should be allowed to stand at 60°C,90%RH max	60°C,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation 	-30°C/80°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±2KV~±6KV(contact),±2KV~±8KV(air), RS=330Ω CS=150pF 10 times	—

Note1: No dew condensation to be observed.

Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.

Note3: The packing have to including into the vibration testing.


11. Product inspection check list

Check samples by meter V_{IN} , I_{system}

Item	No 1	No 2	No 3	Note
V_{IN} (V)	5	5	5	
I_{system} (mA)	503	509	507	

Check sample Reliability Test

- Prepare sets for testing

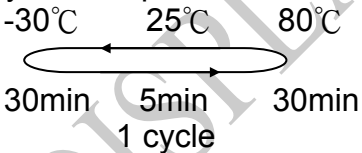Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	80°C 240hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-30°C 240hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60°C, 90%RH max	60°C, 90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation  -30°C 25°C 80°C 30min 5min 30min 1 cycle	-30°C/80°C 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=±2KV~±6KV(contact), ±2KV~±8KV (air), RS=330Ω CS=150pF 10 times	—

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

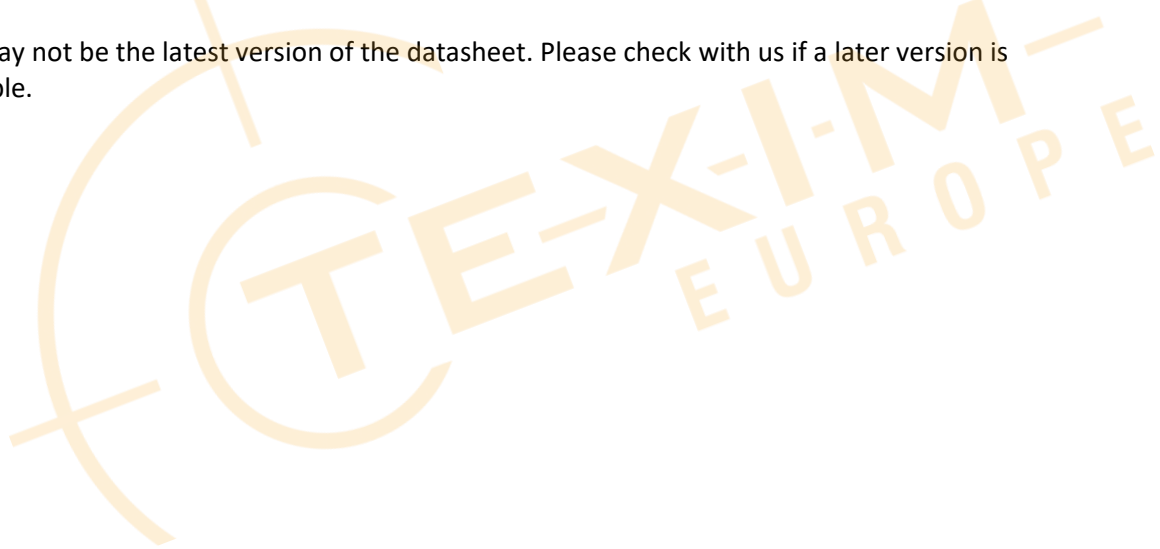



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Stockholmsgade 45
2100 Copenhagen

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com