

Distributed by:



www.texim-europe.com

**gemalto**  
security to be free

## 4G LTE Terminals



Multi Band  
LTE Cat 1



3G HSPA  
2G GSM



Ethernet  
Interface  
(ELS61T only)



Java embedded



Embedded  
TCP/IP Stack



Advanced  
Temperature  
Management



FOTA  
configurable &  
royalty-free




RLS Monitoring  
(Jamming  
Detection)



USB 2.0  
(PLS62T-W only)



Flexible  
Mounting

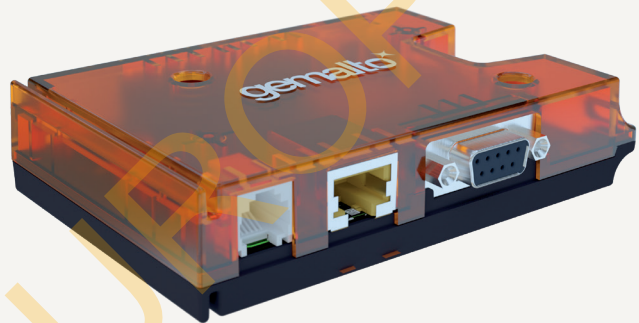

# TERMINALS

**Cinterion**® 4G LTE Terminals

LTE Cat 1 with 2G/3G fallback optimized for M2M IoT Solutions


# Cinterion® 4G LTE Terminal

## LTE Cat 1 IoT Gateway powered by Java

Gemalto's new suite of Cinterion LTE Cat1 Smart Terminals brings new simplicity to M2M. Leveraging Gemalto's next-generation Java embedded technology, the plug-and-play solutions powered by the multi-band LTE Cat-1 basebands with seamless fallback to 3G and/or 2G enable secure wireless TCP/IP connectivity anywhere in the world for a variety of industrial applications such as metering, remote monitoring, transportation, security and many more. The Cinterion ELS61T gateways come in regional versions providing universal industrial interfaces e.g. Ethernet or serial RS232 are encased in a compact, unprecedented mounting options. They provide first-

time IoT developers and small-scale implementers with a flexible, cost effective solution to quickly launch enterprise optimization solutions that expand the Internet of Things. Optional features include embedded component SIM (MIM) and a cloud based SensorLogic application enablement platform that enable out-of-the-box M2M communication reducing integration complexity and Total Cost of Ownership. Like all Cinterion products, the SMART 3G terminals come with full type approval (FTA) and are certified by the largest carriers worldwide.

### Plug-and-Play with Most Flexible Mounting



#### Plug & Play

ELS61 Terminal is a simple and reliable plug-and-play communication device that allows new M2M implementers to quickly connect their industrial applications using wireless technology. With very little integration and approval efforts, it provides a cost effective, swift solution for enterprise optimization technology. Alternative Power over Ethernet (PoE) for the ELS61T offers two additional benefits: further cost savings and flexibility of device placement. Because PoE runs data and power together over the same cable to each device attached to the local area network (LAN), devices can be installed without additional power supply and without concern for the proximity to individual AC outlets.

#### Embedded Java™

Java offers easy and fast application development, a broad choice of tools, high code reusability, easy maintenance, a proven security concept, on-device debugging as well as multi-threading programming and program execution.

#### Highly Flexible Mounting Concept

Encased in robust plastic housing, the miniaturized terminal works in virtually any application providing secure 24-7 connectivity. For quick and easy implementation, the terminal is compatible with a variety of mounting schemes including: IN rail mounting, C-rail mounting, Screw fixing or use of cable ties.

#### Terminal Variants

Productname	Region	Ethernet	USB	Java™	Frequency Bands
ELS61T-E LAN	EMEA	•		•	LTE (1,3,8,20,28), 2G Dual Band
ELS61T-US LAN	USA (AT&T)	•		•	LTE (2,4,5,12), 3G (2,4,5)
ELS31T-V LAN	USA (Verizon)	•			LT E (4 ,13)
ELS61T-AUS LAN	Australia	•		•	LTE (3,5,8,28), 3G (1,5,8)
ELS31T- J LAN	Japan	•			LTE (1,18 ,19)
PLS62T-W USB	Global		•	•	LTE (1,2,3,4,5,7,8,12(17),18,19,20,28), 3G (1, 2, 4, 5, 8, 9, 19), 2G Quad Band

# Cinterion® 4G LTE Terminals Features

## GENERAL FEATURES

- > 3GPP Rel.7 Compliant Protocol Stack
- > Multiband LTE Cat1 3G, 2G depending on variant
- > SIM Application Toolkit, letter class "b", "c", "e"
- > Control via standardized and extended
- > AT commands (Hayes, TS 27.007 and 27.005)
- > TCP/IP stack access via AT command and transparent TCP services
- > Secure Connection for client IP services
- > Internet Services TCP/UDP server/client, DNS, Ping, FTP client, HTTP client
- > PoE - Power over Ethernet, optional
- > Supply voltage range 8 – 30 V
- > Dimension: 115 x 86 x 26 mm (incl. connectors)
- > Weight: approx 130g
- > Operating Temperature: -30 °C to +65 °C

## SPECIFICATIONS

- > LTE Cat.1 data rates  
DL: max 10.3Mbps UL: max. 5.2 Mbps
- > HSPA+ Cat.8 (ELS61-US) data rates  
DL: max. 7.2 Mbps, UL: max. 5.76 Mbps
- > GPRS Class 12 data rates  
DL: max. 85.6 kbps, UL: max. 85.6 kbps
- > SMS text and PDU mode support

## SPECIAL FEATURES

- > Ethernet interface (NAPT) with optional Power over Ethernet (PoE)
- > Real time clock with alarm functionality
- > Multiplexer according 3GPP TS 27.010
- > RLS Monitoring (Jamming detection)
- > Informal Network Scan
- > Programmable hardware watchdog
- > Flexible mounting concept
- > Integrated FOTA, configurable and royalty free
- > Embedded SIM as an option (MIM)

## JAVA OPEN PLATFORM (ELS61T / PLS62T)

- > Java™ ME
- > Secure data transmission with HTTPS/SSL
- > Multi-Threading programming and
- > Multi-Application execution
- > 18 MB RAM and 31 MB Flash File System

## INTERFACES

- > Antenna Connector SMA (female) for GSM/WCDMA
- > Diversity antenna (LTE) SMA connector
- > 20 pin header (Weidmüller) with GPIO's, power, SPI, I<sup>2</sup>C
- > Mini SIM card reader, 1,8V and 3,0V
- > Embedded SIM as an option (MIM)
- > 2 operating status LED's
- > High speed serial modem interface ASCO
- > Plug-in power supply connector (6-pole Western jack)
- > V.24/ V.28 RS-232 interface, up to 920kbps, auto-bauding (D-sub 9-pole female socket)
- > Ethernet interface (NAPT)

## DRIVERS

- > USB, MUX driver for Microsoft® Windows 7 and 10
- > RIL, USB driver for Microsoft® Windows Embedded Handheld™ >= 6.x

## APPROVALS

- > CE, RED, GCF, PTCRB, IC, UL
- > AT&T and other local approvals and provider Certifications
- > WEEE, EuP, RoHS and REACH compliant

**For more information, please visit**

[gemalto.com/m2m](http://gemalto.com/m2m), [developer.gemalto.com](http://developer.gemalto.com), [www.facebook.com/gemalto](http://www.facebook.com/gemalto)  
or follow @gemaltoIoT on twitter.

The information provided in this brochure contains merely general descriptions or characteristics of performance, which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of Gemalto M2M GmbH or supplier companies whose use by third parties for their own purposes could violate the rights of the owners. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners. ARM9 is a registered trademark of ARM Limited.



➔ [GEMALTO.COM/M2M](http://GEMALTO.COM/M2M)



## The Netherlands



Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
F: +31 (0)53 573 33 30  
E: [nl@texim-europe.com](mailto:nl@texim-europe.com)

## Belgium



Zuiderlaan 14 bus 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
F: +32 (0)2 462 01 25  
E: [belgium@texim-europe.com](mailto:belgium@texim-europe.com)

## UK & Ireland



St. Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
F: +44 (0)845 299 22 26  
E: [uk@texim-europe.com](mailto:uk@texim-europe.com)

## Germany North



Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
F: +49 (0)4106 627 07-20  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Germany South



Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
F: +49 (0)89 436 086-19  
E: [germany@texim-europe.com](mailto:germany@texim-europe.com)

## Austria



Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
F: +43 (0)662 216 026-66  
E: [austria@texim-europe.com](mailto:austria@texim-europe.com)

## Nordic region



Sdr. Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
F: +45 88 20 26 39  
E: [nordic@texim-europe.com](mailto:nordic@texim-europe.com)

## Italy



Via Matteotti 43  
IT-20864 Agrate Brianza (MB)

T: +39 (0)395 967 226  
F: +39 (0)395 967 226  
E: [italy@texim-europe.com](mailto:italy@texim-europe.com)

## General information



[info@texim-europe.com](mailto:info@texim-europe.com)  
[www.texim-europe.com](http://www.texim-europe.com)