

Distributed by:



gemalto
security to be free

EHS5



Dual Band
HSPA



Java
embedded



Multi Design
Capability
(LGA)



RLS Monitoring
(Jamming Detection)



USB 2.0
High Speed
compatible



Advanced
Temperature
Management



Embedded
TCP/IP Stack




eCall /
ERA GLONASS
Compliant



FOTA
configurable &
free of charge



BIP
Bearer
Independent
Protocol

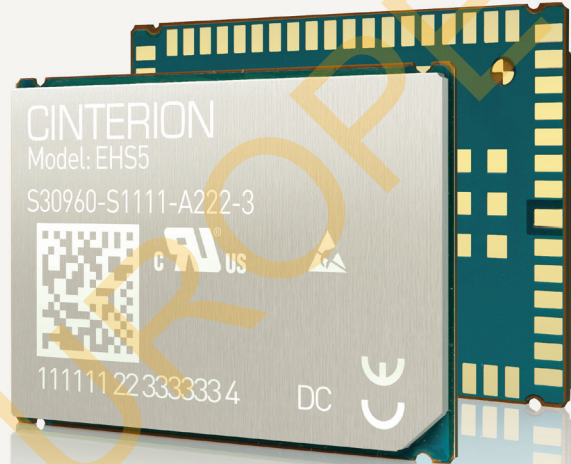

3G

Cinterion® EHS5 Wireless Module
Highly Efficient 3G in a 2G Footprint

Cinterion® EHS5 Wireless Module

Highly Efficient 3G in a 2G Footprint

The Cinterion EHS5 module represents a milestone in embedded Java machine-to-machine (M2M) communication, offering smart connectivity for industrial applications.

EHS5 delivers highly efficient 3G communication in an ultra-compact footprint. EHS5 is an ideal solution for M2M applications moving to 3G technology with a focus on long-lasting, futureproof and cost efficient M2M applications. Offering a backward and forward compatible footprint, its multi design capability offers seamless migration and unmatched flexibility to choose frequency bands and global roaming whenever needed.

The platform incorporates an improved Java concept using Multi MIDlet Java execution to simultaneously host and run multiple applications and protocols. An extended security concept with the latest TLS/SSL engine provides secure and reliable TCP/IP connectivity while an enriched internal flash file system enables free of charge firmware updates over-the-air (FOTA) when required. Sophisticated sandbox modeling and layered architectures simplify device manage-


ment (DM) and separate mobile network operator approvals from application code development, allowing simultaneous progress of both phases for a shorter time to market.

Powered by Intel's latest HSPA baseband, the next generation of the award-winning Industrial platform features high speed data communication with 7.2 Mbps (max) in the downlink and 5.76 Mbps (max) in the uplink.

The tiny EHS5 comes in Gemalto M2M's unique LGA (Land Grid Array) package perfectly suited to the manufacturing needs of small, high-volume M2M devices with a focus on reliable and efficient processes. EHS5 supports voice and data communication and best in class low power consumption incorporated with common industrial interfaces such as USB and serial interfaces.

EHS5 is available in two variants: EHS5-US (850/1900 MHz) for North America, and EHS5-E (900/2100 MHz) for the rest of the world.

Perfect M2M at Minimal Footprint



BIP (Bearer Independent Protocol)

BIP secures broadband speed to eUICC (MIM / classic) to enable On-Demand Provision Service (OPS) and Remote Application Management by direct communication between eUICC and network based on internal TCP/IP stack. As a result it enables instant data connectivity on 1st use of a device, as well as a flexible mobile subscription throughout the lifecycle and a reduced number of customer device variants.

eCall/ ERA glonass

Equipped with high performance e-call/GLONASS, the EHS5 platform is already prepared to meet the comprehensive requirements of the European eCall and ERA-GLONASS initiatives to bring rapid assistance to motorists involved in a collision.

Java™

Java offers easy and fast application development, a broad choice of tools, high code reusability, easy maintenance, a proven security concept, on-device debugging as well as multi-threading programming and program execution.

Gemalto M2M Support includes:

- > Personal design-in consulting for hardware and software
- > Extensive RF test capabilities
- > GCF/PTCRB conform pretests to validate approval readiness
- > Regular training workshops



Local engineers, a competent helpdesk, a dedicated team of R&D specialists and an advanced development center are the hallmarks of our leading support offer.

Cinterion® EHS5 Features

GENERAL FEATURES

- > 3GPP Rel.7 Compliant Protocol Stack
- > Dual-Band UMTS (WCDMA/FDD)
 - EHS5-E: 900 and 2100 MHz
 - EHS5-US: 850 and 1900 MHz
- > Dual-Band GSM
 - EHS5-E: 900 and 1800 MHz
 - EHS5-US: 850 and 1900 MHz
- > SIM Application Toolkit, Class 3, with BIP and RunAT support
- > 3GPP & Russian eCall support
- > Embedded IP stack
- > Control via standardized and extended AT commands (Hayes, TS 27.007 and 27.005)
- > TCP/IP stack access via AT command and transparent TCP services
- > Secure Connection for client IP services
- > Internet Services TCP/UDP server/client, DNS, Ping, FTP client, HTTP client
- > Supply voltage range 3.1 - 4.5 V, highly optimized for minimal power consumption
- > LGA66 soldering mount, MSL4
- > Dimension: 27.6 x 18.8 x 2.3 mm
- > Weight: 2.7 g
- > Operating Temperature: -40 °C to +90 °C

SPECIFICATIONS

- > HSDPA Cat.8 / HSUPA Cat.6 data rates
 - DL: max. 7.2 Mbps, UL: max. 5.76 Mbps
- > EDGE Class 12 data rates
 - DL: max. 237 kbps, UL: max. 237 kbps
- > GPRS Class 12 data rates
 - DL: max. 85.6 kbps, UL: max. 85.6 kbps
- > CSD data transmission up to 9.6 kbps, V.110, non-transparent
- > SMS text and PDU mode, cell broadcast
- > High quality voice support for handset, headset and hands-free operation
- > Integrated TTY modem
- > Speech codec: FR, HR, EFR and AMR

SPECIAL FEATURES

- > USB interface supports multiple composite mode and a Linux-/Mac- compliant mode
- > Firmware update via USB and serial interface
- > Real time clock with alarm functionality
- > Multiplexer according 3GPP TS 27.010
- > RLS Monitoring (Jamming detection) in 2G and 3G
- > Informal Network Scan
- > Customer IMEI/SIM-Lock as variant
- > Integrated FOTA, configurable and free of charge

JAVA OPEN PLATFORM

- > Java™ ME 3.2
- > Secure data transmission with HTTPS/SSL
- > Multi-Threading programming and Multi-Application execution
- > 10 MB RAM and 10 MB Flash File System

INTERFACES (LGA PADS)

- > Pad for GSM/WCDMA Antenna
- > USB 2.0 HS interface up to 480 Mbps
- > High speed serial modem interface ASC0
- > HSIC HS interface up to 480 Mbps
- > 16 GPIO lines shared with DSR, DTR, DCD (all ASC0), ASC1 (RXD, TXD, RTS, CTS), SPI, Fast-Shutdown, Network-Status-Indication, PWM and Pulse-Counter lines
- > ADC and I2C interface
- > 4-wire high speed serial interface ASC1
- > Digital audio interface
- > UICC and U/SIM card interface 1.8 V / 3 V
- > Lines for Module-On and Reset

DRIVERS

- > USB, MUX driver for Microsoft® Windows XP™, Vista™ and 7™
- > RIL, USB driver for Microsoft® Windows Embedded-Handheld™ >= 6.x
- > USB, MUX driver for Microsoft® Windows Embedded-Compact™ >= 5.x

APPROVALS

- > EHS5-E: CE, R&TTE
- > EHS5-US: FCC, PTRCB, UL, IC
- > GCF Listing
- > AT&T and other local approvals and provider certifications
- > EuP, RoHS and REACH compliant

For more information, please visit

gemalto.com/m2m, developer.gemalto.com, www.facebook.com/gemalto, or follow @gemaltoT on twitter.

The information provided in this brochure contains merely general descriptions or characteristics of performance, which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. All product designations may be trademarks or product names of Gemalto M2M GmbH or supplier companies whose use by third parties for their own purposes could violate the rights of the owners. Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners. ARM9 is a registered trademark of ARM Limited.

Gemalto M2M GmbH
Werinherstraße 81
81541 Munich
Germany



➔ GEMALTO.COM/M2M



The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

Italy



Via Matteotti 43
IT-20864 Agrate Brianza (MB)

T: +39 (0)395 967 226
F: +39 (0)395 967 226
E: italy@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com