

QutePC-1700 Series

0.6-Liter Box PC with Intel® Atom™ Bay Trail Processors



- Intel® Atom™ Bay Trail Dual core / Quad core Processors
- Support 1x DDR3L SO-DIMM up to 8GB
- Support 1x VGA, 1xHDMI
- Support 1x GbE, 1x USB3.0, 2x USB 2.0 and Audio
- Support 1x 2.5" SATA HDD, 1x Micro SD (**QutePC-1700 only**)
- Support 1x RS-232

Distributed by:



Product Overview

The QutePC-1700 series is a Box PC with a volume of just 0.6-liter that is ideal for space critical applications. This embedded hardware platform is designed with Intel® Atom™ Bay Trail Dual core / Quad core processors which provide with excellent performance.


System is supported with 1x DDR3L SO-DIMM up to 8GB. Featured are 1x 2.5" SATA HDD, Micro SD (**QutePC-1700 only**), GbE, USB3.0, USB2.0, VGA, HDMI and RS-232.

Technical Information

Construction
Plastic Casing
System Board
Intel® Atom™ Bay Trail Dual core / Quad core Processors
Memory
1x DDR3L SO-DIMM up to 8GB
I/O Panel
Front I/O panel 1x Phone Jack for Line-Out & MIC-In 1x Push button (w/LED) for power on/off 1x WiFi LED 1x HDD LED 2x USB2.0 1x USB3.0 1x Micro SD card cage (QutePC-1700 only) Rear I/O panel 1x DC JACK 1x RJ-45, GbE 1x RJ-45, RS-232 1x VGA 1x HDMI 1x 3G Antenna (Optional) 1x Reset Button 1x External Power Button Support 1x Kensington Lock Support

Storage
1x 2.5" SATA HDD
Wifi
802.11b/g/n
Power Supply
Input: 100-240 VAC, 50-60 Hz Output: 65W, +19VDC/ 3.42A output
Cooling
System Fan
Temperature / Humidity
Operating: 0°C to 50°C, 0%-90%, non-condensing Storage: -20°C to 80°C, 0%-90%, non-condensing
OS Support
Windows 7, Windows 8, Linux
Dimensions
130 x 39 x 115 mm (WxHxD)
Weight
550 g
Mounting
VESA mount, Desktop stand
Certifications
CE, FCC Class A

QutePC-1700 Series I/Os

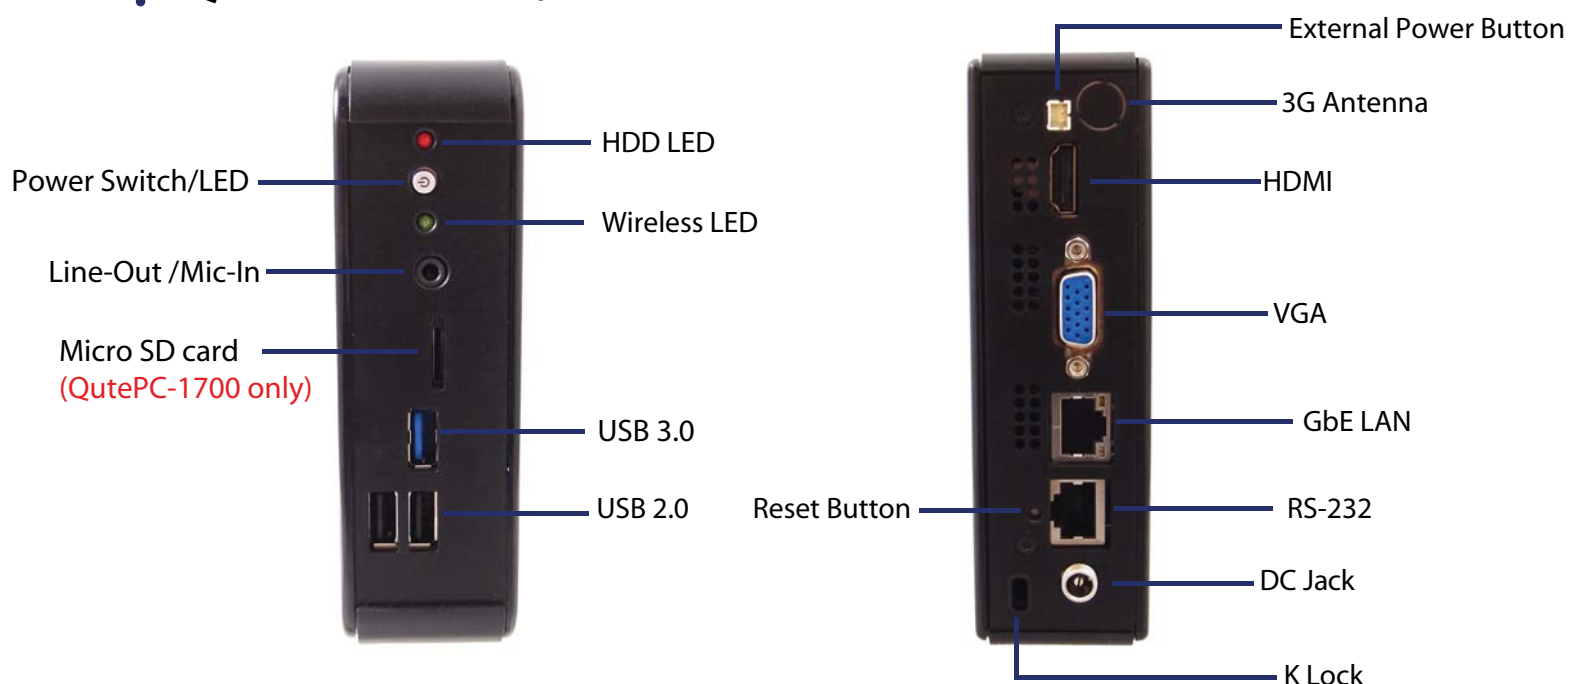

Ordering Information

Article	Description
QutePC-1700	Box PC , Intel® Atom™ BayTrail Dual Core E3825 Processor, 1x DDR3L SO-DIMM up to 8GB, 1x GbE LAN, 1x Micro SD card cage, 1x VGA, 1x HDMI, 2x USB 2.0, and 1x USB 3.0
QutePC-1710	Box PC , Intel® Celeron® BayTrail Quad Core J1900 Processor, 1x DDR3L SO-DIMM up to 8GB, 1x GbE LAN, 1x VGA, 1x HDMI, 2x USB 2.0, and 1x USB 3.0