

BXTL-10

Intel Tiger Lake-U Processor based Fanless Embedded PC with 4 HDMI

Distributed by:



www.texim-europe.com



Features

- CPU: Intel Tiger Lake-U Processors
- Memory: Dual Channel SO-DIMM DDR4 UP to 64 GB
- Display: Intel® UHD or Iris® Xe Graphics via 4xHDMI2.0
- Ethernet: 10/100/1000 Mbps
- Storage: SATA, M.2 for SSD(NVMe)
- Expansion: M.2 For WiFi, M.2 for 4G/5G
- Power: 12V/19V DC input



IoT Solutions
Alliance

Industrial Solution
Builders Specialist

Maxtang®

MAXIMIZING YOUR COMPUTING PRODUCTIVITY

Introduction

The BXTL-10 is a compact, fanless, embedded industrial PC powered by the 11th Gen Intel Core i7/i5/i3 and Celeron processor, designed for performance-demanding applications with solid protection. It provides an immersive visual experience with Intel Iris Xe or UHD Graphics through 4x HDMI2.0. It supports dual-channel SO-DIMM DDR4 up to 64GB, two RJ45 1-Gigabit Ethernet controllers, and M.2, SATA3.0 for storage. A comprehensive input/output interface includes 4xUSB2.0, 2xUSB3.2, Mic-in+ Line-out with standard DC-in, which caters to most market's requirements.

As an ideal solution for multiple displays uses, it is excellent for electronic gaming machines or digital signage. This product retains the robust design of all Maxtang product lines at a new cost-effective price point. The powerful features can provide a great user experience with increased productivity, stability, and reliability.



H/W Monitor



Watchdog




GPIO



Brightness

I/O Interfaces

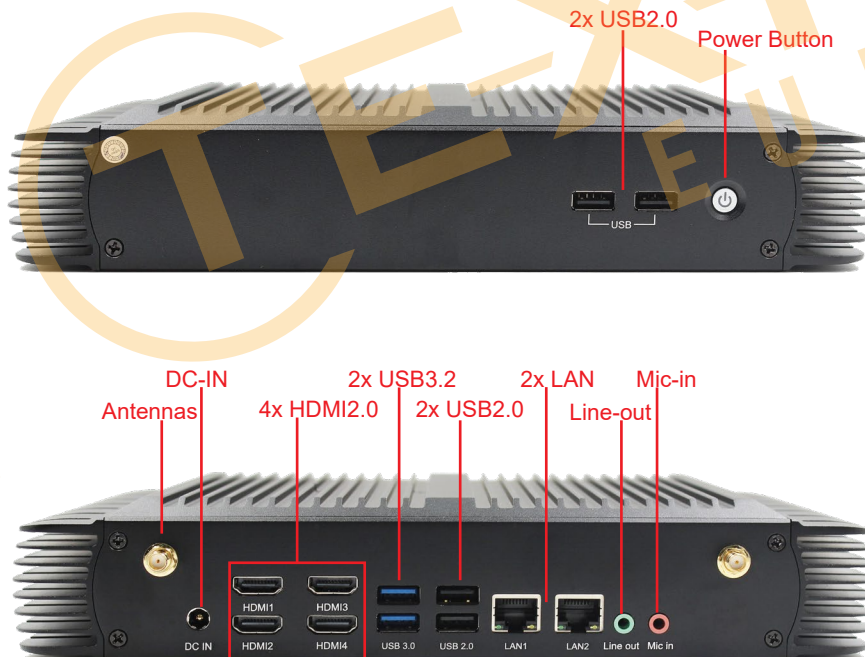


Technical Specifications

Processor	CPU	Celeron-6305	i3-1115G4	i5-1135G7	i7-1165G7
	Core Frequency	1.8 GHz	/	/	/
	Turbo Frequency	/	4.1GHz	4.4GHz	4.7GHz
	Cache	4MB	6MB	8MB	12MB
	BIOS	AMI SPI BIOS			
Memory	Type	Dual Channel SO-DIMM DDR4			
	Max Capacity	64 GB			
Display	GPU	Integrated Intel® UHD or Iris® Xe Graphics			
	Display via	4x HDMI 2.0, 4K Resolution HD Display			
Ethernet	Speed	10/100/1000 Mbps			
	Controller	Intel i211			
	Interface	RJ 45			
Audio	Audio Codec	Realtek HD			
	Interface	1xMic-in, 1xLine-out, Supports audio header and amplifier header			
Hardware		CPU System temperature, onboard voltage, watchdog			
Storage	M.2	1x M.2 for 2280 SSD NVMe			
	SATA3.0	1			
Expansion	M.2	1x M.2 for 4G/5G			
	M.2	1x M.2 for WiFi			
I/O Interface	LAN	2			
	USB 2.0	4			
	USB 3.2	2			
	DC-in	1			
	Antennas	2			
	Power Button	1			
Dimension	Size	299mm x 200mm x 52.2mm			
	Type	Embedded PC			
Power	Standard Port	12V/19 V DC-in			
Temperature	Operating Temp.	-20°C to 60°C			
	Storage Temp.	-40°C to 80°C			
Cooling Method		Passive			
Operating System		Windows 10/11 64 bit, Linux 64 bit			

* All specifications and photos are subject to change without notice.

Dimension(in mm)

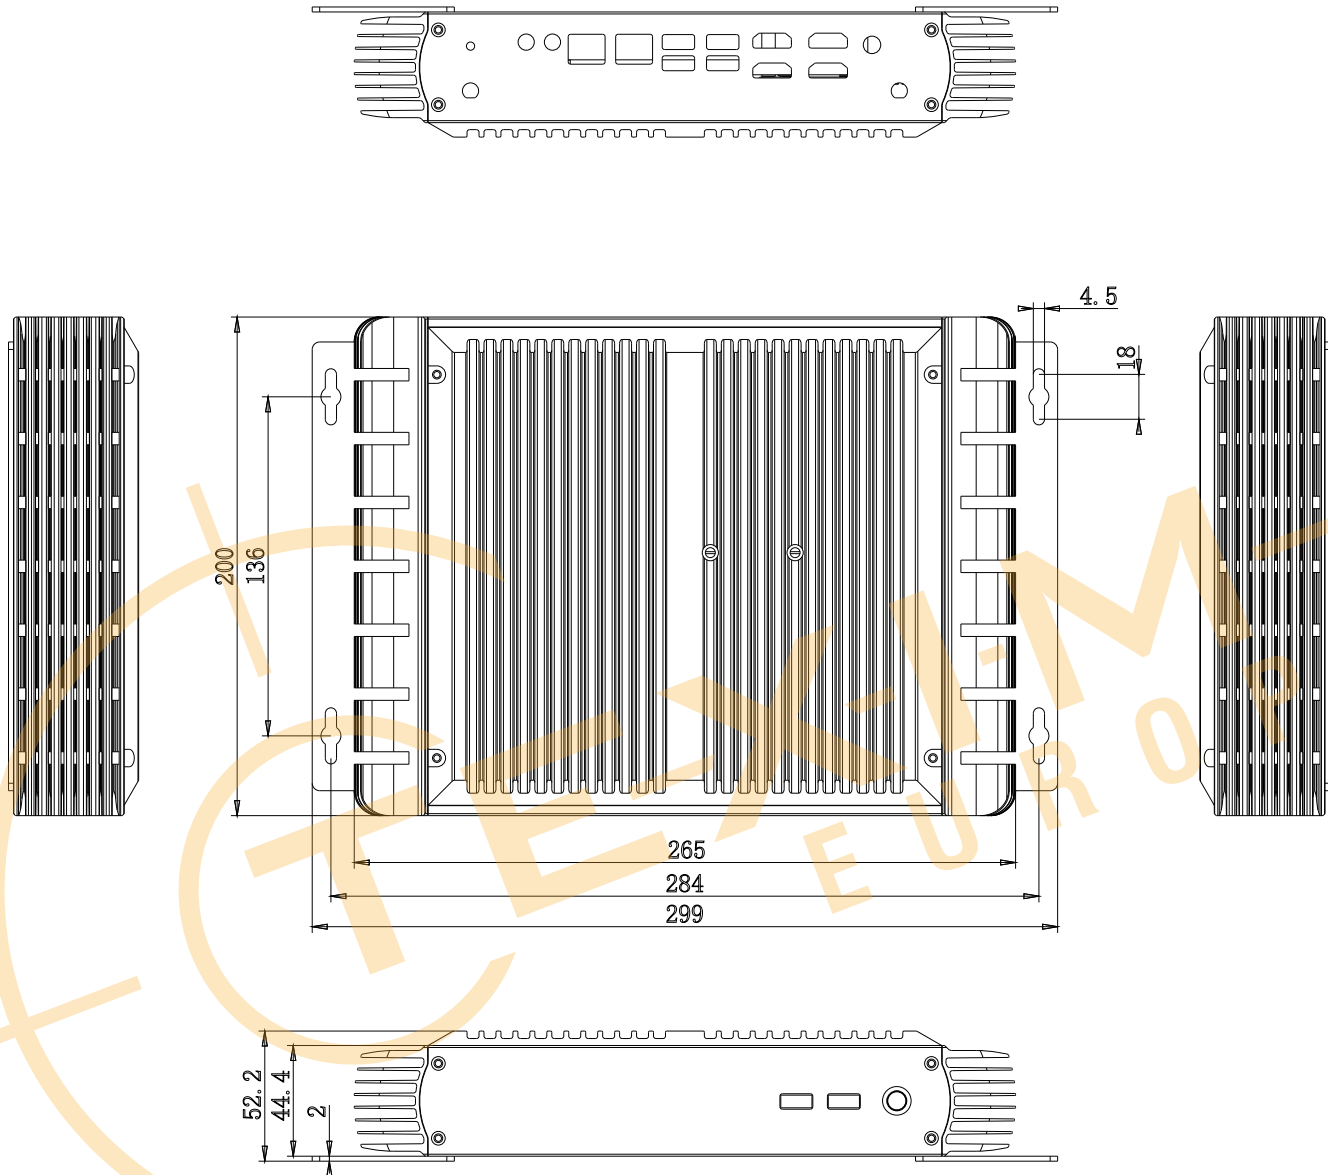

Copyright © 2018 Maxtang Technology Co., Ltd. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate however, no responsibility is assumed for inaccuracies. Maxtang and the Maxtang logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

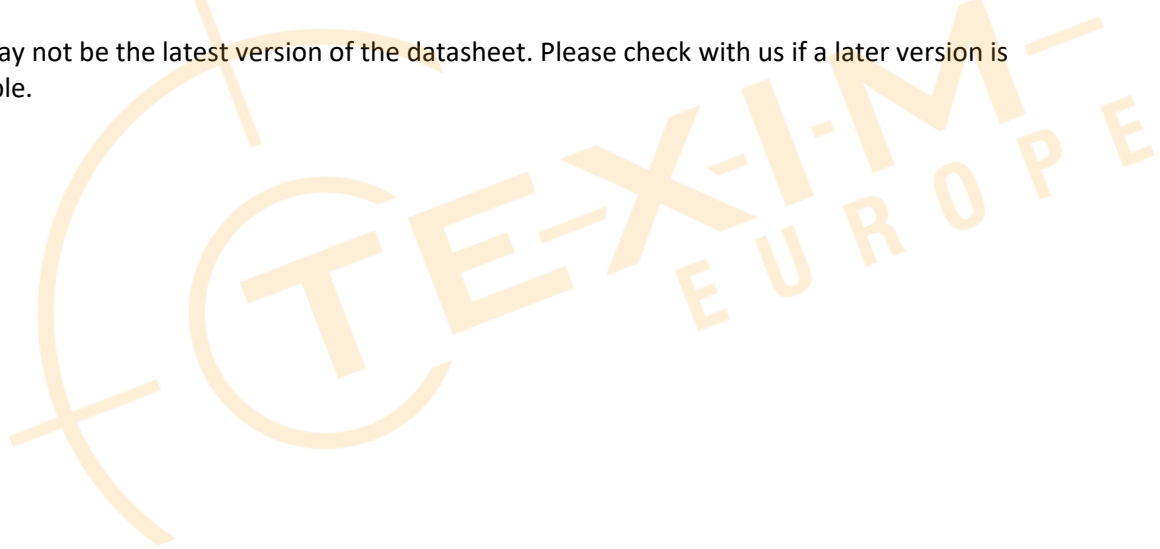



Headquarters & Warehouse

Elektrostraat 17
NL-7483 PG Haaksbergen
The Netherlands

T: +31 (0)53 573 33 33
E: info@texim-europe.com
Homepage: www.texim-europe.com



The Netherlands

Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
E: nl@texim-europe.com



Belgium

Zuiderlaan 14, box 10
B-1731 Zellik

T: +32 (0)2 462 01 00
E: belgium@texim-europe.com



UK & Ireland

St Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
E: uk@texim-europe.com



Germany - North

Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
E: germany@texim-europe.com



Germany - South

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: muenchen@texim-europe.com



Austria

Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
E: austria@texim-europe.com



Nordic

Søndre Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
E: nordic@texim-europe.com



Italy

Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
E: italy@texim-europe.com