

IES308

8-port 10/100M Unmanaged Industrial Ethernet Switch

Features

1. Advanced Ethernet switch technical
2. IEEE802.3/802.3u/802.3x/802.3d,store and forward
3. Plug-and-play, 10/100M, F/H duplex, MDI/MDI-X auto negotiation
4. Broadcast storm protection
5. Relay output warning for power failure and port break alarm
6. Redundant 24VDC power input(12V~48VDC)
7. -40~75°C working temperature
8. Designed for industrial applications. IP30 protection, rugged high-strength metal case



Introduction

IES308 series are a smart plug-and-play industrial Ethernet switch, which can provide economical solution for your Ethernet. Its dustproof fully sealed structure(pr protective case of IP30 level), over-current, over-voltage and EMC protected redundant double power input as well as built-in intelligent alarm design can help system main

tenancy personnel monitor the network operation, which can work reliably in harsh and dangerous environment.

IES308 Supports 8 ports 10/100Base-T(X), Full/Half duplex mode, and auto MDI/MDI-X connection.

Specification

Interface

RJ45 Ports: 10/100BaseT(X) auto connection, F /H duplex or force work mode, and support MDI/MDI-X connection

Alarm output interface: One relay alarm output. Support power, port link and network alarm

Indicator: Power, Port link, abnormality alarm indication, 10M/100M Rate

Technology

Standards: IEEE802.3, IEEE802.3x, IEEE802.3u

Forwarding and Filtrate Rate: 148810pps

Processing type: Store and Forward

System exchange bandwidth: 4.8G

Relay

Max voltage: DC30V

Max power input: 24VA

Power

Input Voltage: 24VDC (12VDC~48VDC)

Overload Current Protection

Support dual power backup

Mechanical

Dimensions: 136mm×52mm×105mm (H×W×D)

Casing: IP30 protection, Metal case

Weight: 800g

Environmental

Operating Temperature: -40 to 75°C

Storage Temperature: -45 to 85 °C

Ambient Relative Humidity: 10% to 95% (non-condensing)

Approvals

EMI: FCC Part 15, CISPR (EN55022) class A

EMS: EN61000-4-2(ESD),

EN61000-4-3(RS),

EN61000-4-4(EFT),

EN61000-4-5 (Surge),

EN61000-4-6 (CS),

EN61000-4-8,

EN61000-4-11

Shock: IEC 60068-2-27

Free Fall: IEC 60068-2-32

Vibration: IEC 60068-2-6

Warranty: 5 years

Approvals: FCC,CE, RoHS approvals


Double power supply input and relay output alarm

IES308 series can provide double power supply backup and 1-route relay alarm output. Redundant double DC power supply input (12V ~ 48VDC) can provide your equipment with uninterrupted operation to further provide additional protection for normal operation of automatic system. 1-route equipment alarm output signal

can support power supply and port link alarm. Relay can give out output alarm in case of power supply failure or interruption of port link to notice or remind site engineers to make quick response for appropriate emergency maintenance



Dimension

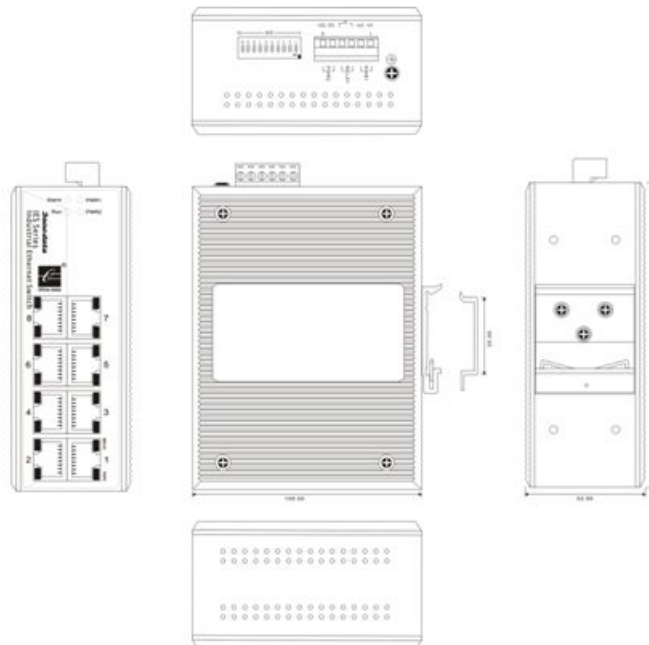

Packing List

1. Ethernet switch IES308 series (plus terminal block)×1
2. User manual ×1
3. DIN-Rail fittings ×1

Distributed by:



www.texim-europe.com

The Netherlands



Elektrostraat 17
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33
F: +31 (0)53 573 33 30
E: nl@texim-europe.com

Belgium



Zuiderlaan 14 bus 10
B-1731 Zellik

T: +32 (0)2 462 01 00
F: +32 (0)2 462 01 25
E: belgium@texim-europe.com

UK & Ireland



St. Mary's House, Church Lane
Carlton Le Moorland
Lincoln LN5 9HS

T: +44 (0)1522 789 555
F: +44 (0)845 299 22 26
E: uk@texim-europe.com

Germany North



Bahnhofstrasse 92
D-25451 Quickborn

T: +49 (0)4106 627 07-0
F: +49 (0)4106 627 07-20
E: germany@texim-europe.com

Germany South



Martin-Kollar-Strasse 9
D-81829 München

T: +49 (0)89 436 086-0
F: +49 (0)89 436 086-19
E: germany@texim-europe.com

Austria



Warwitzstrasse 9
A-5020 Salzburg

T: +43 (0)662 216 026
F: +43 (0)662 216 026-66
E: austria@texim-europe.com

Nordic region



Sdr. Jagtvej 12
DK-2970 Hørsholm

T: +45 88 20 26 30
F: +45 88 20 26 39
E: nordic@texim-europe.com

General information



info@texim-europe.com
www.texim-europe.com