


SMD for reflow soldering

MSL1




Closed clamp

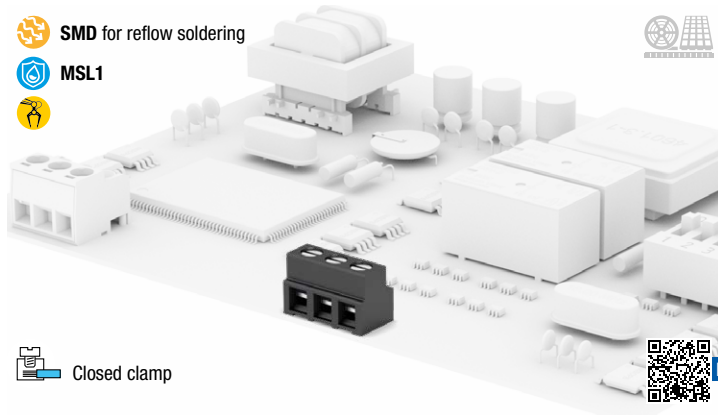

Last release

Your drawings and notes

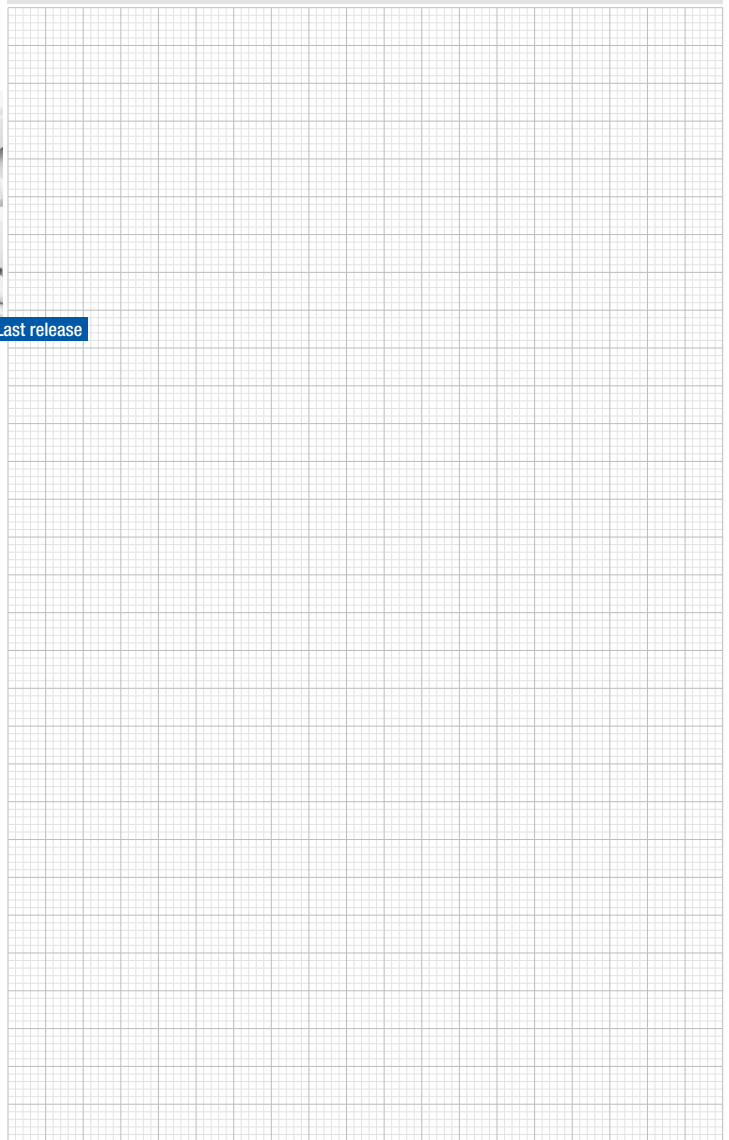

### General data

<b>Dimensional class:</b>	low
<b>Standard colour:</b>	black
<b>Pitches:</b>	metric 5 mm, 10 mm (.197 in, .394 in)
<b>Screw dimension:</b>	M3
<b>Recommended/highest tightening torque:</b>	0.5/0.6 Nm (4.42/5.31 lbf-in)
<b>PCB thickness:</b>	max. 2.4 mm (.094 in)
<b>PCB hole diameter for peg:</b>	1.4 mm (.055 in)
<b>Stripping length</b>	5 ÷ 6 mm (.197 ÷ .24 in)
<b>Operating temp. range:</b>	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
<b>Contact resistance</b>	<15 mΩ
<b>Insulating material group:</b>	I (CTI ≥ 600V)
<b>Self-extinguishing class UL94:</b>	V0
<b>Insulation resistance</b>	>10 <sup>9</sup> Ω (500V DC)

### Certifications


#### UL (n. E167473)

300 V - T 110 - 17.5 A (\*), 10 A (\*\*) - 30÷16 AWG - 6 lbf-in for 5 mm pitch  
 600 V - T 110 - 17.5 A (\*), 10 A (\*\*) - 30÷16 AWG - 6 lbf-in for 10 mm pitch  
 \*factory wiring - \*\*field wiring

#### IEC EN 60947-7-4

250 V - T 110 - 17.5 A - 1.5 mm<sup>2</sup> solid (13.5 A - 1 mm<sup>2</sup> stranded) for 5 mm pitch  
 750 V - T 110 - 17.5 A - 1.5 mm<sup>2</sup> solid (13.5 A - 1 mm<sup>2</sup> stranded) for 10 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site [www.sauro.net](http://www.sauro.net) or your representative Sales Manager.

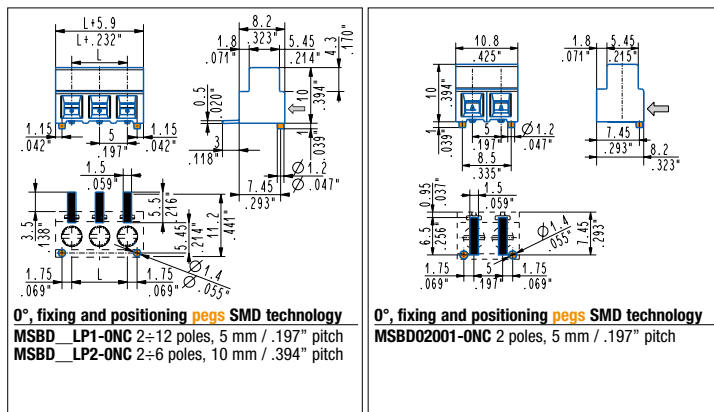



## Headquarters & Warehouse

Elektrostraat 17  
NL-7483 PG Haaksbergen  
The Netherlands

T: +31 (0)53 573 33 33  
E: info@texim-europe.com  
Homepage: www.texim-europe.com



### The Netherlands

Elektrostraat 17  
NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
B-1731 Zellik

T: +32 (0)2 462 01 00  
E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
Carlton Le Moorland  
Lincoln LN5 9HS

T: +44 (0)1522 789 555  
E: uk@texim-europe.com



### Germany - North

Bahnhofstrasse 92  
D-25451 Quickborn

T: +49 (0)4106 627 07-0  
E: germany@texim-europe.com



### Germany - South

Martin-Kollar-Strasse 9  
D-81829 München

T: +49 (0)89 436 086-0  
E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9  
A-5020 Salzburg

T: +43 (0)662 216 026  
E: austria@texim-europe.com



### Nordic

Søndre Jagtvej 12  
DK-2970 Hørsholm

T: +45 88 20 26 30  
E: nordic@texim-europe.com



### Italy

Via Matteotti 43  
IT-20864 Agrate Brianza (MB)

T: +39 (0)39 9713293  
E: italy@texim-europe.com