

# OMNI-2215-ADN

21.5" Modular HMI Panel PC With Intel® Processor N-series Processors


Front View



Top View



Bottom View

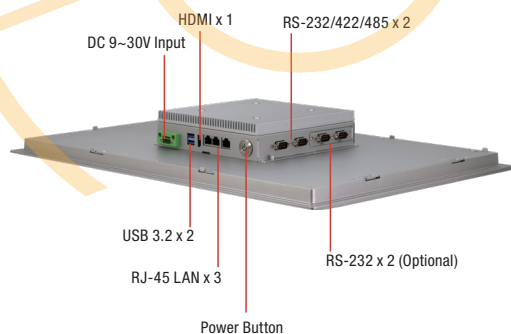

## Features

- 21.5" (1920 x 1080) TFT LCD Display
- Intel® Processor N-series Processors
- Projected Capacitive Multi Touch
- Aluminum Design
- IP65 Compliant Front Bezel
- Fanless Operation
- VESA Mount/Built-in Panel Mount Bracket
- 9-30V DC in a wide range of input




## Specifications

System	
Processor	Intel® Processor N50 Intel® Processor N97
System Memory	DDR5 4800 MHz, up to 16GB SODIMM x 1
LCD/CRT Controller	CPU Integrated
Ethernet	Intel® Ethernet Controller I226, 2.5GbE LAN x 3
I/O Port	USB 3.2 Gen 2 (Type-A) x 2 USB 2.0 x 2 via Cables DB-9 x 2 (RS-232/422/485, set by BIOS) HDMI 1.4b x 1 2.5GbE RJ-45 x 3 9V ~ 30V 3-pin DC Terminal Block Connector Power on/off Switch with LED Light x 1
Storage Disk Drive	SATA-III x1 (6 Gb/s, for 2.5" SATA drive bay) Full Size mPCIe (Support PCIe(x1) / SATA)
Expansion Slot	M.2 B-Key 3052 x1 with Nano SIM M.2 E-Key 2230 x1
OS support	Windows® 10 IoT Enterprise LTSC 2021 Windows® 10/11
Mechanical	
Construction	Aluminum Front Bezel + Metal Chassis
Mounting	Panel Mount/VESA Mount (VESA 100)
Dimension	21.6" x 14.7" x 2.6" (549mm x 372mm x 67mm)
Carton Dimension	26.4" x 7.9" x 20.7" (670mm x 200mm x 525mm)
Gross Weight	15.2 lb. (6.9Kg)
Environmental	
Operating Temperature	-4°F ~ 122°F (-20°C ~ 50°C) with 0.7m/s airflow
Storage Temperature	-4°F~140°F (-20°C~60°C)
Storage Humidity	90% @40°C; non-condensing
Vibration	1Grms /5~500Hz/ operation - with mSATA
Shock	15G peak acceleration (11 m sec. duration) with mSATA
EMC	CE/FCC Class A
Power Supply	
DC input	DC 9~30V
LCD	
Display Type	21.5" TFT-LCD, LED
Max Resolution	1920 (H) x 1080 (V)
Max. Colors	16.7M
Luminance	250 cd/m <sup>2</sup>
Viewing Angle	178° (H) ; 178° (V)
Back Light	LED
Back Light MTBF (Hours)	50,000
Touchscreen	
Type	Projected Capacitive Multi-Touch
Light Transmission	90%



# OMNI-2215-ADN

## Dimension Unit: mm

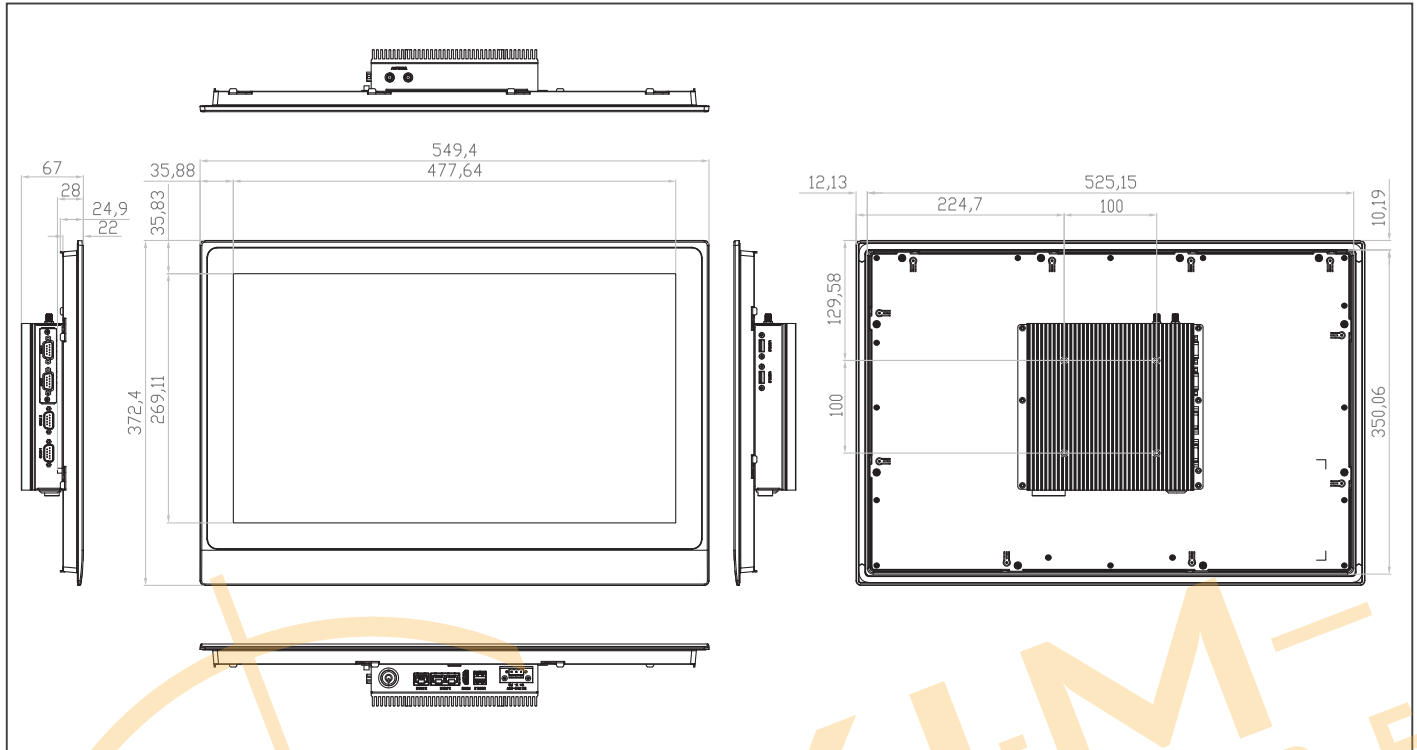

## Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	CPU	LAN	USB	RS-232/422/485	Storage	RAM	Display	Internal Expansion	Mounting	Power	Operating Temp.	Touch
OMNI-2215HTT-ADN-A1-1010	21.5" TFT LCD	1920 x 1080	250 cd/m <sup>2</sup>	178° (H) / 178° (V)	Intel® Processor N50	3	USB 3.2 x 2 USB 2.0 x 2	2	SATA-III x1 (6 Gb/s, for 2.5" SATA drive bay) Full Size mPCIe (Support PCIe(x1) / SATA)	DDR5, up to 16GB	HDMI x1	M.2 B-Key 3052 x1 with Nano SIM M.2 E-Key 2230 x1	VESA / Panel Mount	DC 9~30V	-20°C~50°C with air flow	Projective Touch
OMNI-2215HTT-ADN-A2-1010	21.5" TFT LCD	1920 x 1080	250 cd/m <sup>2</sup>	178° (H) / 178° (V)	Intel® Processor N97	3	USB 3.2 x 2 USB 2.0 x 2	2	SATA-III x1 (6 Gb/s, for 2.5" SATA drive bay) Full Size mPCIe (Support PCIe(x1) / SATA)	DDR5, up to 16GB	HDMI x1	M.2 B-Key 3052 x1 with Nano SIM M.2 E-Key 2230 x1	VESA / Panel Mount	DC 9~30V	-20°C~50°C with air flow	Projective Touch

## Packing List

- Phoenix Power Connector
- OMNI-2215-ADN
- Screws

## Optional Accessories

- **AP-OT9789LA1000**  
LA-100 LCD Monitor Stand
- **170X000799**  
Power Cord (US Type)
- **170X000800**  
Power Cord (European Type)
- **170X000803**  
Power Cord (Japanese Type)
- **1255900849**  
12V 84W Power Adapter

## **Disclaimer**

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Texim Europe B.V. its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Texim"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Texim makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product.


It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time.

All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts.

Please contact us if you have any questions about the contents of the datasheet.

This may not be the latest version of the datasheet. Please check with us if a later version is available.

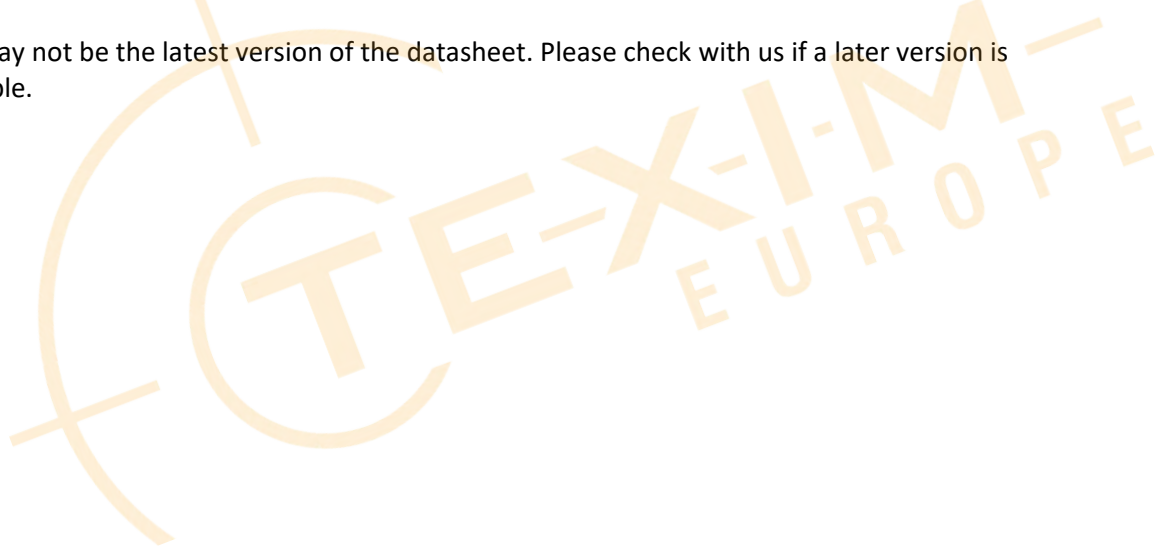



## Headquarters & Warehouse

Elektrostraat 17  
 NL-7483 PG Haaksbergen  
 The Netherlands

T: +31 (0)53 573 33 33  
 E: info@texim-europe.com  
 Homepage: www.texim-europe.com



### The Netherlands

Elektrostraat 17  
 NL-7483 PG Haaksbergen

T: +31 (0)53 573 33 33  
 E: nl@texim-europe.com



### Belgium

Zuiderlaan 14, box 10  
 B-1731 Zellik

T: +32 (0)2 462 01 00  
 E: belgium@texim-europe.com



### UK & Ireland

St Mary's House, Church Lane  
 Carlton Le Moorland  
 Lincoln LN5 9HS

T: +44 (0)1522 789 555  
 E: uk@texim-europe.com



### Germany

Bahnhofstrasse 92  
 D-25451 Quickborn

T: +49 (0)4106 627 07-0  
 E: germany@texim-europe.com



### Germany

Martin-Kollar-Strasse 9  
 D-81829 München

T: +49 (0)89 436 086-0  
 E: muenchen@texim-europe.com



### Austria

Warwitzstrasse 9  
 A-5020 Salzburg

T: +43 (0)662 216 026  
 E: austria@texim-europe.com



### Nordic

Stockholmsgade 45  
 2100 Copenhagen

T: +45 88 20 26 30  
 E: nordic@texim-europe.com



### Italy

Martin-Kollar-Strasse 9  
 D-81829 München

T: +49 (0)89 436 086-0  
 E: italy@texim-europe.com